



EN ISO 20345:2022+A1:2024

YOUR DISTRIBUTOR



LET SAFETOE PROTECT YOUR STEP & EMPOWER YOUR WORK

Shanghai Langfeng Industrial Co.,ltd.

📍 Building 1-107, Hutai road 6188 (Xinggu Industrial Park), Shanghai, China

☎ 0086-21-52127320 ✉ langfeng@chinalangfeng.com

📠 0086-21-52121031 🌐 www.safetoe.net

WhatsApp: +86-18116268656 Wechat: +86-18116268656



SAFE WORKERS
BETTER WORLD



2025-2026 EDITION



Founded in 2010 and headquartered in China, Shanghai Langfeng is a world-class PPE manufacturer with vertically integrated R&D and production capabilities.


Our brand Safetoe & Safeyear is trusted by workers in 45+ countries, certified to CE EN ISO 20345:2022, ASTM F2413, and ISO 9001:2015.



Safetoe Quality Dedicated & Assurance

Approved with Europe CE certificate, American ASTM certificate, Canada CSA certificate etc.

Best Sellers

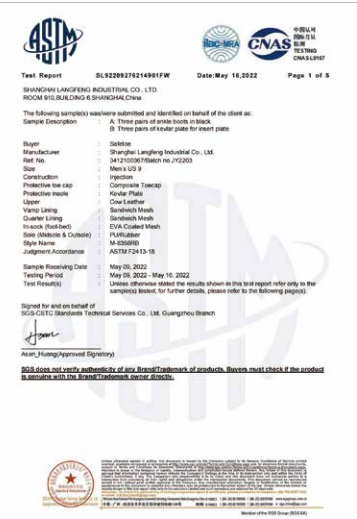

ASTM Certificate




CE Certificate



UKCA Certificate




CSA Certificate

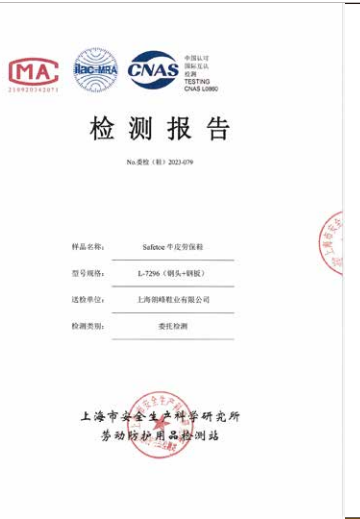

国标



ISO9001:2015 Certificate

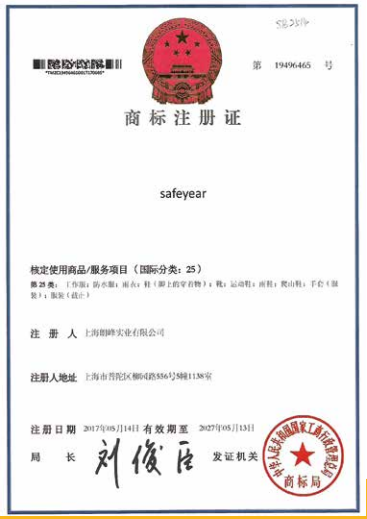

Design Patent

Certificates



80% Safetoe Safety Shoes are Approved with CE EN ISO 20345:2022 standard. Mainly approved by Europe SGS and CTC lab.



After UK Separate from EU, Safetoe work together with UK SGS lab and apply UKCA certificate for UK market.



Safetoe Safety Shoes are Approved with USA ASTM standard, and very welcome for North America and South America market.



Safetoe is approved with CSA certificate since 2022, with model M-8025 series.



Safetoe is approved with China GB standard, GB 21148-2020



Safetoe company is approved as ISO 9001:2015 quality management system since 2017. For scope of safety shoes, protective glasses etc.

Safetoe Honors & Trophies
Safetoe's Excellent Quality has Won Favors & Awards of Partners



Exhibition and Partners

Safetoe has years of experience in the production and development of professional safety shoes and PPE products, serving over 58 global distributors & sales partners worldwide, providing global marketing support and fast warehousing and logistics systems. Meanwhile, we are constantly expanding brand awareness of “SAFETOE” and promoting our brand to users worldwide.

We are committed to providing partners with increasing sales and profits, and providing consumers with a good user experience. Welcome to consult with us about agent issues.



 Algeria



 UK



 Italy



 Portugal



 Malaysia



 UAE



 Ghana



 Saudi Arabia



 Qatar



 Indonesia



 Thailand



 Cameroon



 Yemen



 Jordan



 Sri Lanka



 Pakistan



24 Hours
Water
Resistant



Water Resistant



Flex

Oil Resistant

Safetoe Package Design



safetoe®
TOP QUALITY
SINCE 1984

safetoe
FOR QUALITY SINCE 1961

STYLE: M-8027
SIZE: 42/EU 8/UK 9/U

ASTM F2413-18
M 1/75 C 7/5 PR

CE EN ISO 20345 S3 SRC

LEATHER UPPER BALANCE MA
MADE MATERIALS

**UK
CA**

PD: ZR-
04/202
MADE IN CHN

The image shows a row of six different shoe inserts from the Safetoe brand. From left to right: 1. A yellow insert with the Safetoe logo and text: "Top Quality Creative Design Amazing Comfort" and "www.safetoe.net". 2. A white insert with the text "Protection". 3. A white insert with the text "Traffic Top Ice" and a list of features: "Temperature Control", "Anti Static", "Anti Shock", "Anti Bacteria", and "Anti Odor". 4. A blue and white insert with the text "Air Insole". 5. A green insert with the text "Print" and a graphic of a foot print. 6. A brown insert with the text "Genuine Leather" and a graphic of a cow.

★ www.safetoe.net



Scratch & Check Authenticity

A photograph of a brown cardboard box for Safetoe Top Quality 1984. The box is open, showing the product inside. The product is a black rectangular box with yellow and white text. The Safetoe logo is visible on the side of the box.

EN ISO 20345:2022+A1:2024 SAFETY FOOTWEAR

Marking categories of safety footwear


Category		Additional requirement
Class I	Class II	
SB	SB	Basic requirement
S1	S4	SB+ Closed heel area Energy absorption of seat region Anti-static
S2	S5P S5L S5S	S1+ Water penetration& absorption
S3P S3L S3S		S2+ Perforation resistance according to the type cleated outsole
S6		S2+ Water resistantce (WR)
S7P S7L S7S		S3+ Water resistantce (WR)

Example of Marking:
EN ISO 20345:2022 +A1:2024
S7L SR FO HRO

Protection Properties (Additional)	Classification			Symbol
	Class I	Class II	Hybrid	
P _{erforation} Resistance	X	X	X	P/PL/PS
Partially C _{onductive} Footwear	X	X	X	C
A _{nti-static} Footwear	X	X	X	A
H _{eat} I _{nsulation} of Outsole Complex	X	X	X	HI
C _{old} I _{nsulation} of Outsole Complex	X	X	X	CI
E _{nergy} Absorption of Seat Region	X			E
W _{ater} R _{esistance}	X			WR
M _{etatarsal} Protection	X	X	X	M
A _{nkle} Protection	X	X	X	AN
C _{ut} R _{esistance}	X	X	X	CR
S _{lip} R _{esistance} (Ceramic+Glycerine)	X	X	X	SR
W _{ater} P _{enetration} & A _{bsorption}	X			WPA
Resistance to H _{ot} Contact	X	X	X	HRO
Resistance to F _{uel} O _{il}	X	X	X	FO
S _{cuff} C _{ap} Abrasion	X	X	X	SC
L _{adder} G _{rip}	X	X	X	LG



Construction & Building Industry

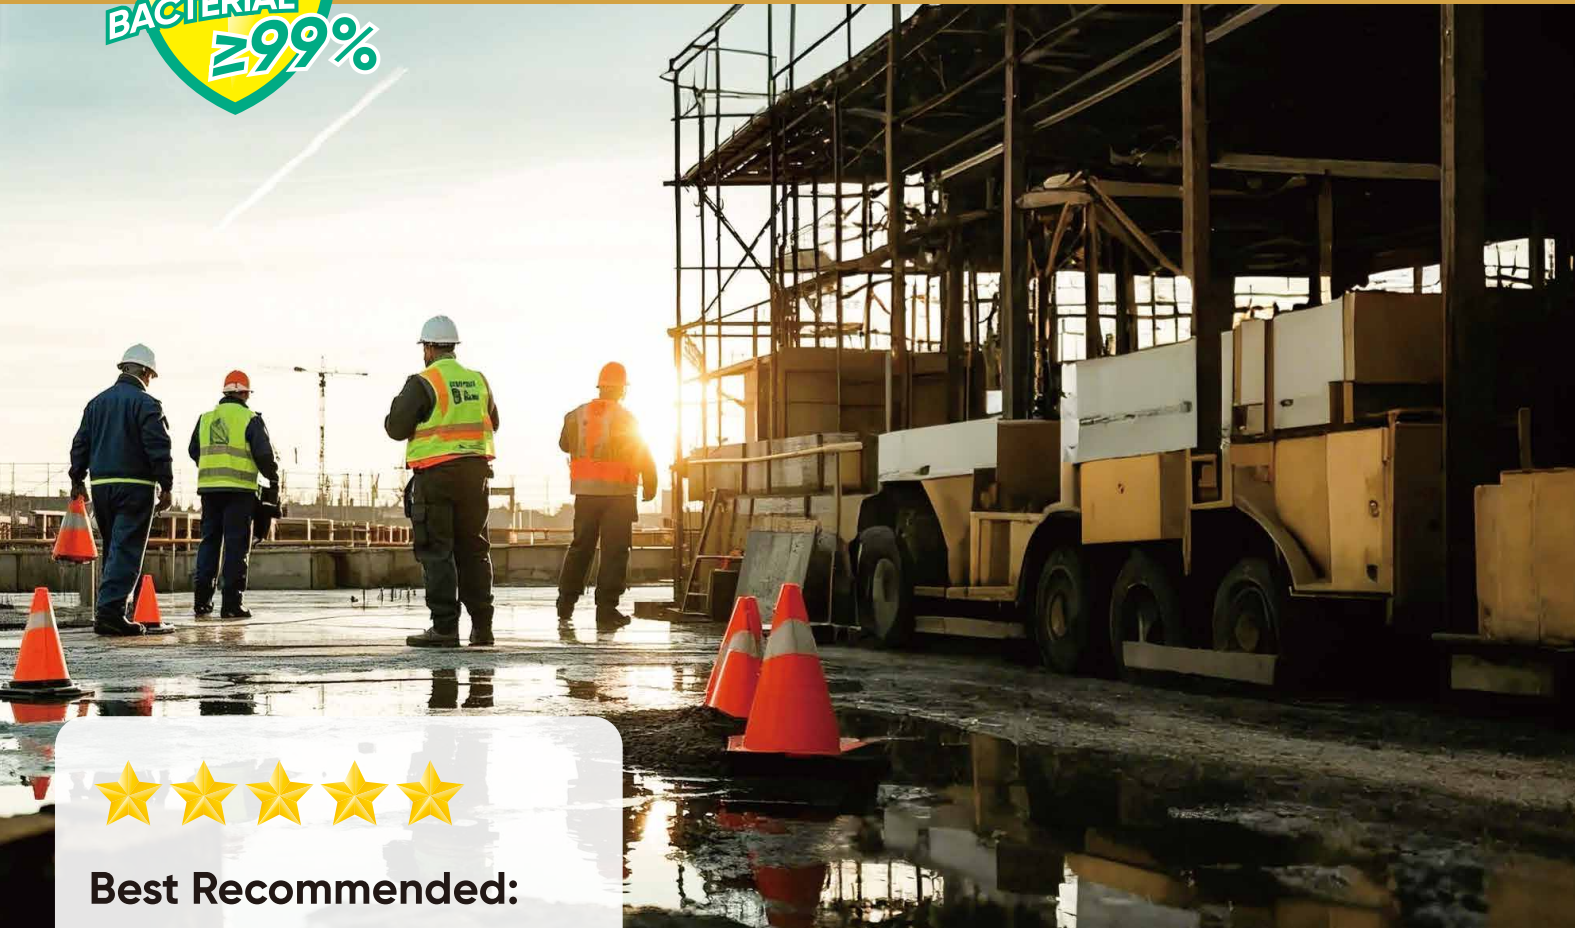

Best Recommended:

Recommended to use:
Construction, Building, Railway & Highway
Maintenance, Cement Workers, Painters,
Carpenters, Bricklayers, House-Builders etc



Hot Best Selling

In Stock



M-8027

Hot Best Selling

In Stock



L-7163

Heavy Duty S3 Safety Shoes


Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-polyu Insoles
Outsole : PU/PU Dual Density
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S3 SR FO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Water Resistant Cow Leather



Anti-Bacterial & Odor Resistant Lining & Insoles

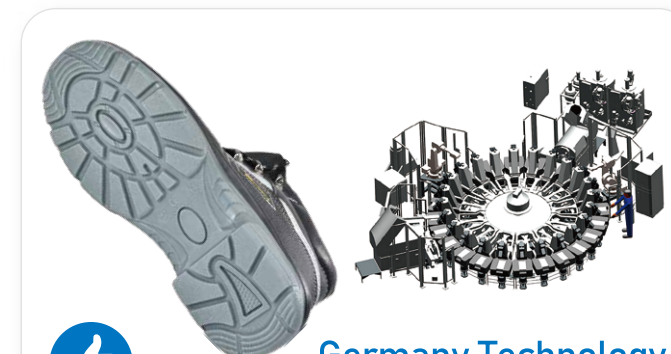

Slip Resistant & Abrasion Resistant & Oil Resistant



CE S3 Approved Steel Toecap & Steel Plate

Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N

+



L-7006 S3 SRC

Upper : High Quality Water Resistant Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8010 S3 SRC

Upper : High Quality Water Resistant Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7222 S3 SRC

Upper : High Quality Water Resistant Cow Leather
Lining : Abrasion Resistant Nylon Fabric
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8215 S3 SRC

Upper : High Quality Water Resistant Cow Leather
Lining : Abrasion Resistant Nylon Fabric
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7147 S3 SRC

Upper : Palm Printed Cow Leather
Lining : Breathable BK Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8183 S3 SRC

Upper : Palm Printed Cow Leather
Lining : Breathable BK Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7141 S3 SRC

Upper : High Quality Water Resistant Cow Leather
Lining : Breathable BK Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8138 S3 SRC

Upper : High Quality Water Resistant Cow Leather
Lining : Breathable BK Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



Automobile & Parts



Best Recommended:

Recommended to use:
Automobile Manufacturing, Automobile
Parts, Steel Parts Assembly, Metal Parts
Painting, Rubber Tire Manufacturing,
Automobile Repair & Maintenance Shops,
Glass Installation etc.



Hot Best Selling



M-8371




L-7285

Metal Free S3 Safety Work Boots

Upper : Full Grain Smooth Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Superior Memory Foam Insoles
Outsole : PU/PU Dual Density
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022 S3 SRC
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




Overcap Design for Extra Toe Protection

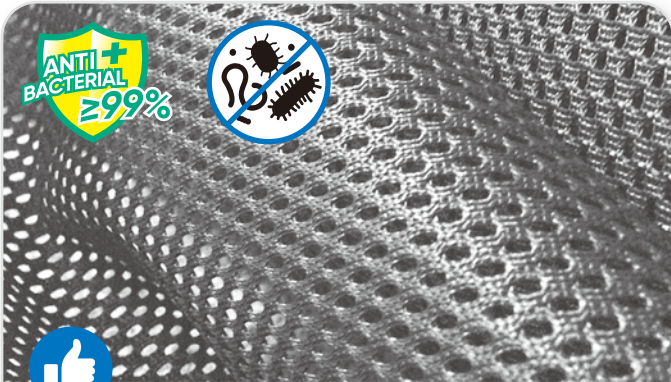


Anti-Bacterial & Odor Resistant Lining & Insoles



Slip Resistant & Abrasion Resistant & Oil Resistant



Germany Technology

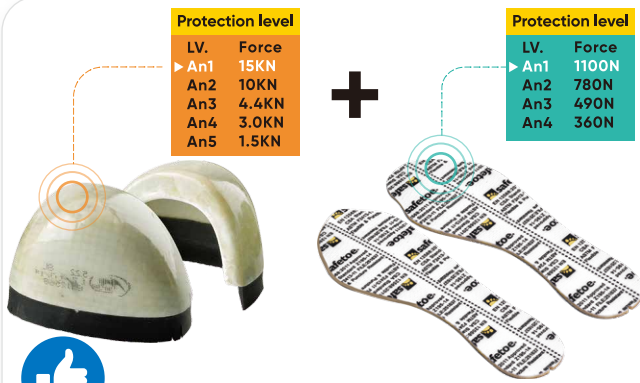

Metal Free Composite Toecap & Kevlar Plate



M-8575



L-7536



M-8520PR



M-8027PR

Super S3 Safety Boots (Metal Free)

Upper : Full Grain Smooth Cow Leather
Lining : Breathable Sandwich Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Nitrile Rubber Injection (300°C HRO)
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S3S SR CI HI FO HRO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)




Super S3 Safety Boots (Metal Free)

Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Nitrile Rubber Injection (300°C HRO)
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S3S SR CI HI FO HRO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)




Overcap Design for Extra Toe Protection

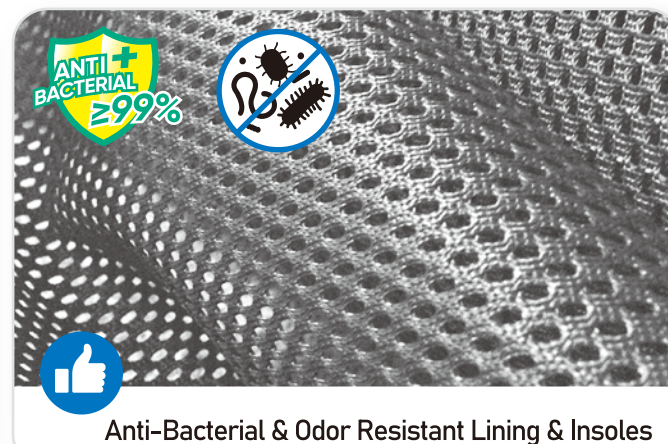

Anti-Bacterial & Odor Resistant Lining & Insoles




Overcap Design for Extra Toe Protection

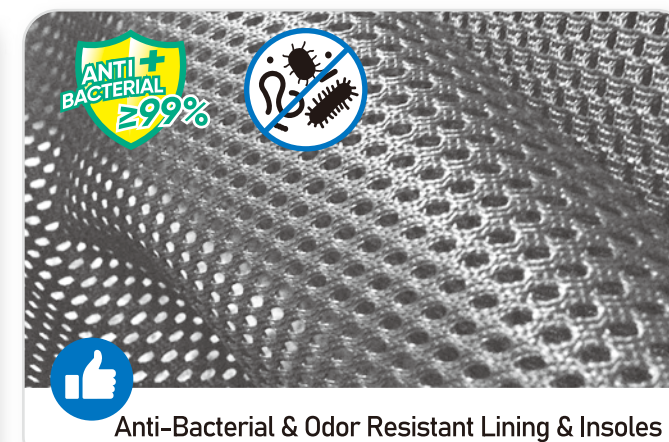

Anti-Bacterial & Odor Resistant Lining & Insoles




Slip Resistant & Abrasion Resistant & Heat Resistant

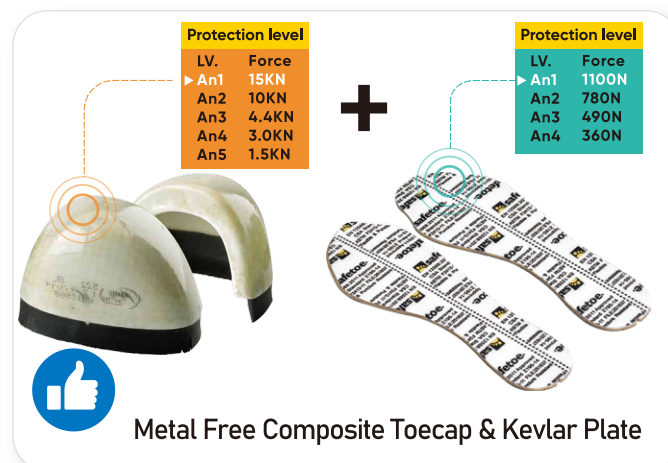

Metal Free Composite Toecap & Kevlar Plate



Slip Resistant & Abrasion Resistant & Heat Resistant

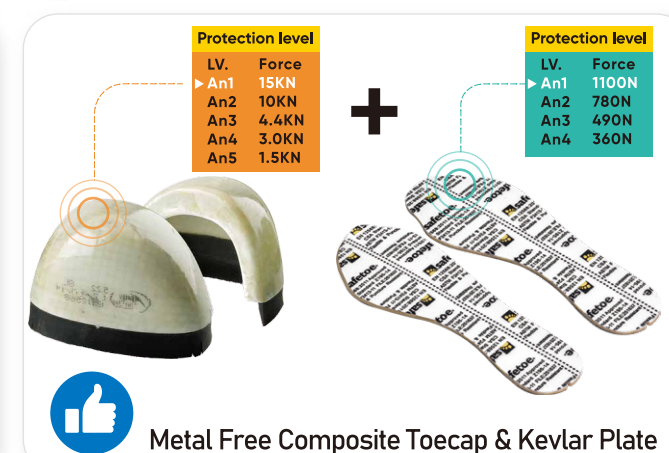

Metal Free Composite Toecap & Kevlar Plate

 In Stock



L-7525 Super SB+I

Upper: Full Grain Crazy Horse Cow Leather
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/Rubber Injection (300°C HRO)
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



Hot Best Selling



Engineer Design



L-7525



Slip-On Non-Lace Safety Shoes


Upper : Full Grain Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Superior Memory Foam Insoles
Outsole : PU/PU Dual Density
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S3 SR FO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Genuine Full Grain Cow Leather



Anti-Bacterial & Odor Resistant Lining & Insoles

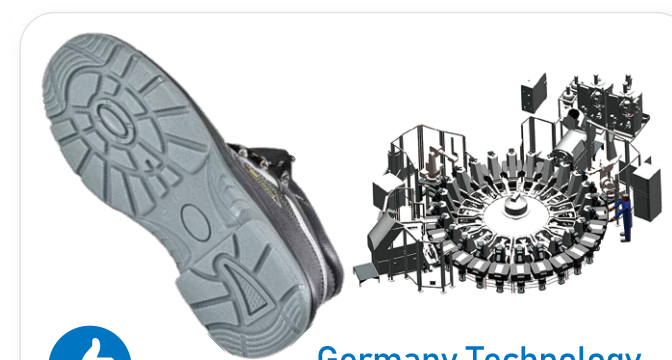

Slip Resistant & Abrasion Resistant & Oil Resistant

Germany Technology



Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

+

Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N

CE S3 Approved Steel Toecap & Steel Plate





Hot Best Selling

In Stock



M-8025NB




Black Color

Slip-On Chelsea Work Boots


Upper : Full Grain Cow Leather+TPU Protector
 Lining : Breathable Sandwich Mesh
 Insole : Super Memory Foam Insoles
 Outsole : PU/Rubber Injection (300°C HRO)
 Toecap : Composite Toecap
 Penetration : Kevlar Midsole Plate
 Size : EU 37-47#, UK 3-13#, US4-14#
 CE EN ISO 20345:2022+A1:2024 S3S SR CI HI FO HRO
 ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)




Scuff Cap Abrasion TPU Protector

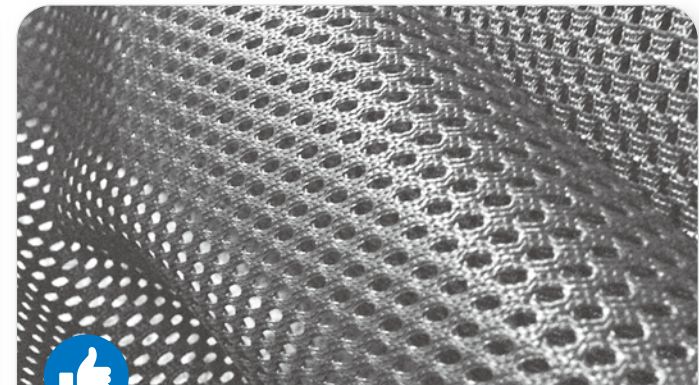

Anti-Bacterial & Odor Resistant Lining & Insoles

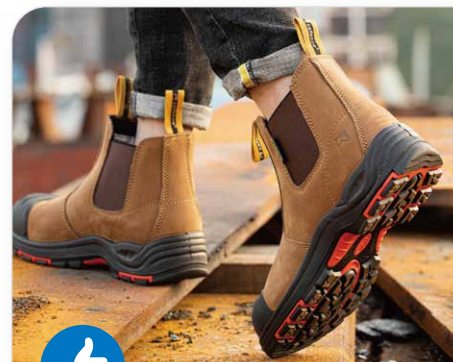

Slip Resistant & Abrasion Resistant & Heat Resistant

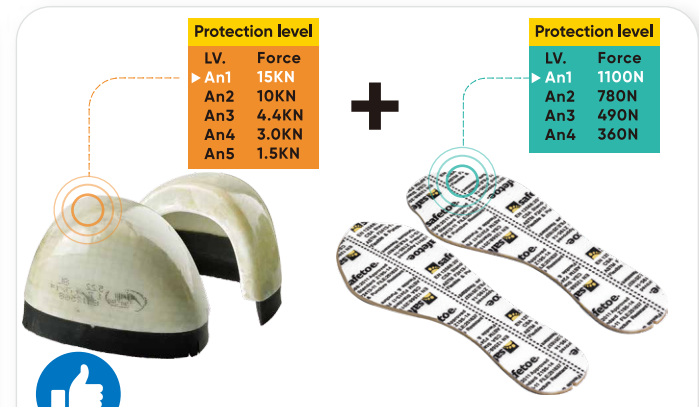

Metal Free Composite Toecap & Kevlar Plate


Protection level	Force
LV. An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

+

Protection level	Force
LV. An1	1100N
An2	780N
An3	490N
An4	360N



Mining Industry

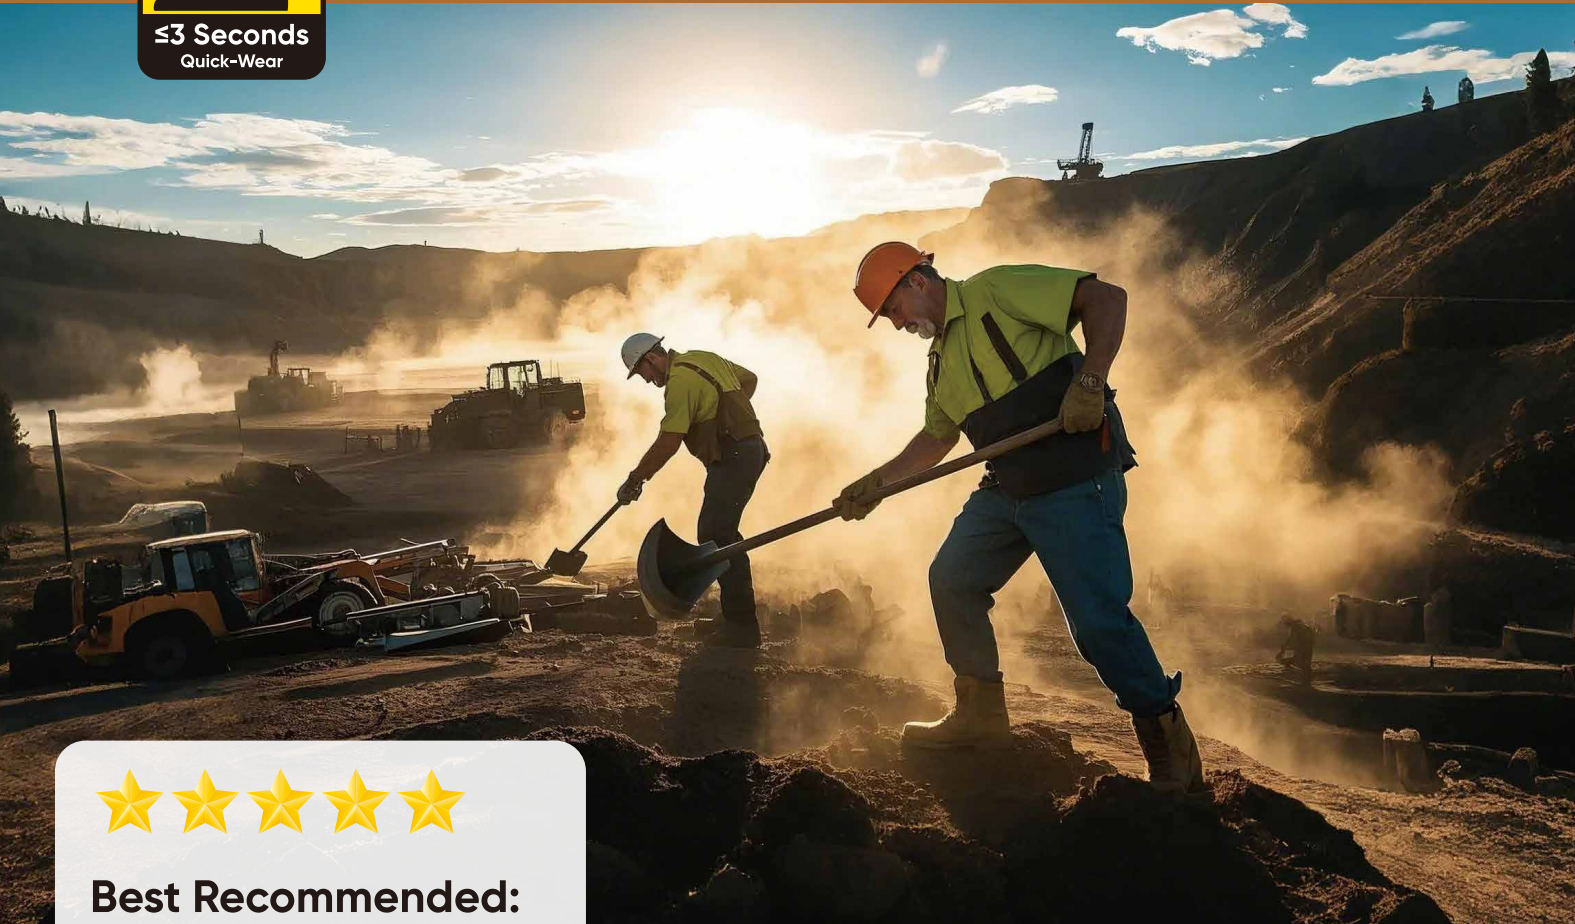

Best Recommended:

Recommended to use:

Mining, Gold Mining, Coal Mining,
Construction, Building , Production
Factories, etc



In Stock



M-8025NB Overcap

Upper: Full Grain Crazy Horse Cow Leather
Lining : Breathable Sandwich Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (300°C HRO)
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022 S3S SR CI HI FO HRO



In Stock



M-8025NB Overcap Black

Upper: Full Grain Cow Leather
Lining : Breathable Sandwich Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (300°C HRO)
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022 S3S SR CI HI FO HRO



In Stock



M-8025

S3 SR

Upper : Black Smooth Cow Leather
Lining : Breathable Sandwich Mesh
Insole : Superior Memory Foam Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8025 Women

Upper : Black Smooth Cow Leather
Lining : Breathable Sandwich Mesh
Insole : Superior Memory Foam Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022





• Classic & Original

• In Stock

M-8316



Beige Color

Soft Toe Classic Chelsea Leather Boots

Upper : Full Grain Crazy Horse Cow Leather
Lining : Abrasion Resistant Lamb Skin Lining
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (300°C HRO)
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20347:2022
ASTM E 2149-2020 Approved Anti-microbial Insoles (Odor Resistant)



100% Genuine Full Grain Cow Leather



Breathable & Heavy Duty Lamb Skin Lining







Slip Resistant & Abrasion
Resistant & Heat Resistant



Super Comfort Memory Foam Insoles

SIZE CONVERSION CHART

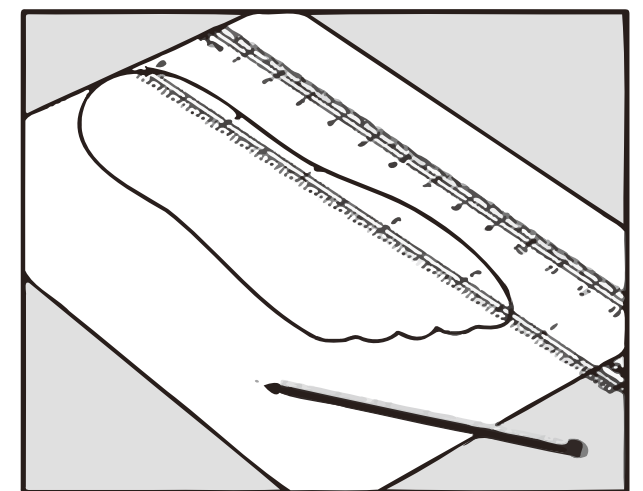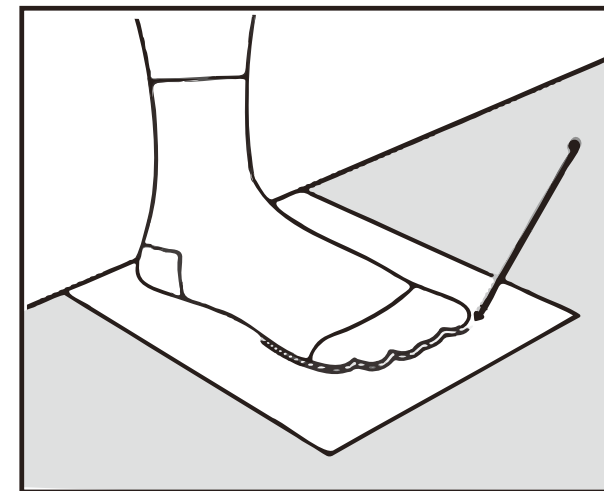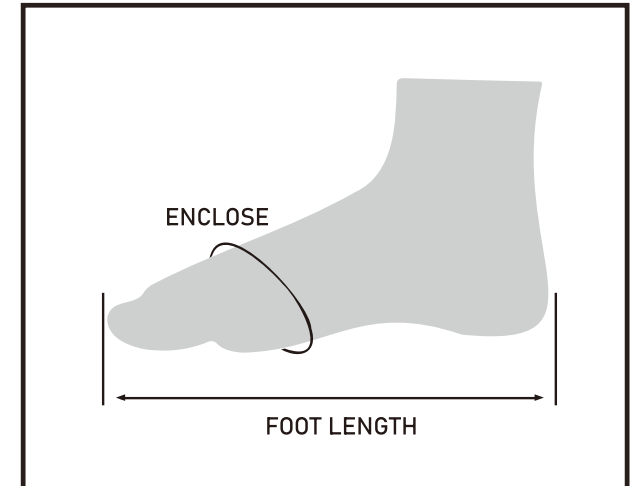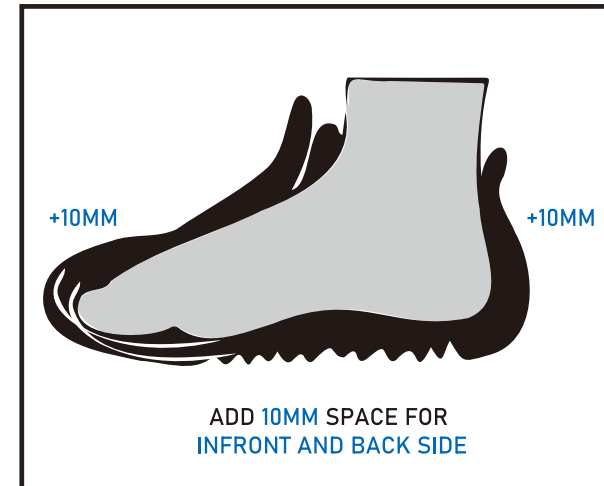

MEASUREMENT UNIT:MM

EURO SIZE	UK SIZE	US SIZE	ASIA SIZE	INNER LENGTH	INNER CIRCUMFERENCE
36	2	3	230	239.98	239.0
37	3	4	235	246.65	243.5
38	4	5	240	253.32	248.0
39	5	6	245	259.00	252.5
40	6	7	250	266.66	257.0
41	7	8	255	273.33	261.5
42	8	9	260	280.00	266.0
43	9	10	265	286.67	270.5
44	10	11	270	293.34	275.0
45	11	12	275	300.00	279.5
46	12	13	280	306.68	284.0
47	13	14	285	313.35	288.5

The table given above is to show our shoes length & circumference by millimeters (mm).
For example,EU size 42 # is equal to UK size 8#, and equal to Us size 9#, and Asia size 260#.The mould inner length is 280mm, and inner circumference is 266mm.The difference of two nearby sizes is 6.67mm.

Hot Best Selling

In Stock




L-7296



M-8377

Breathable & Light-weight Safety Shoes

Upper : Yellow Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : Flexible PU/PU Injection
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S1P FO SR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Breathable Cow Suede Leather Keep Feet Always Dry



Anti-Bacterial & Odor Resistant Lining & Insoles



Slip Resistant & Abrasion Resistant & Oil Resistant



Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN



Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N



CE S1P Approved Steel Toecap & Steel Plate



L-7296 Grey S1P SRC

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8377 Grey S1P SRC

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7295 S1P SRC

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7296 Blue S1P SRC

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



Hot Best Selling

In Stock




L-7328



M-8439

Breathable & Light-weight Safety Shoes

Upper : Blue Cow Suede Leather+Reflective Tape
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : Flexible PU/PU Injection
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S1 PS FO SR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Breathable Cow Suede Leather Keep Feet Always Dry



Anti-Bacterial & Odor Resistant Lining & Insoles



Slip Resistant & Abrasion Resistant & Flexible



Metal Free Composite Toecap & Kevlar Plate



L-7329 Black S1P SRC

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8439 Black S1P SRC


Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



In Stock

L-7331 S1P SRC

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7328 Engineer S3 SRC

Upper: Full Grain Smooth Cow Leather
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022





L-7163 SIP SRC

Upper : High Quality Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7163 SIP SRC

Upper : High Quality Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7502 SIP SRC

Upper : High Quality Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8508 SIP SRC

Upper : High Quality Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7585 SIP SRC

Upper : High Quality Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/Nitrile Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7585 Blue SIP SRC

Upper : High Quality Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/Rubber
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7216 SIP SRC

Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



In Stock



L-7518 SIP SRC

Upper : Black Cow Nubuck Leather
Lining : Breathable Sandwich Air Mesh
Insoles : Super Memory Foam Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



Logistics & Warehouse

Light Weight

20%



Best Recommended:

Recommended to use:
Logistics, Cargo Transportation,
Express & Delivery, Warehouse
Workers, Carton Handling, Truck
Drivers, Forklift Drivers etc

Hot Best Selling

In Stock



L-7561



Grey Color




Blue Color

Slip-On & Light-weight Safety Shoes

Upper : Oxford Fabric+TPU Print
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : Flexible PU/PU Injection
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S1 PS FO SR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




Breathable Fabric to Keep Feet Always Dry

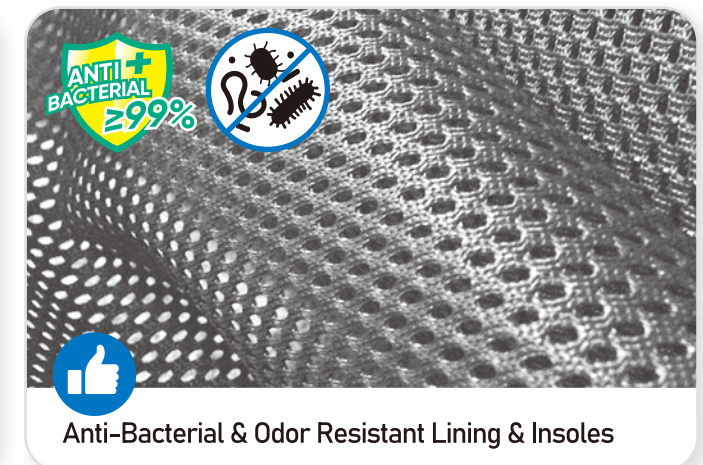

Anti-Bacterial & Odor Resistant Lining & Insoles



Manufactured with Germany Injection Technology

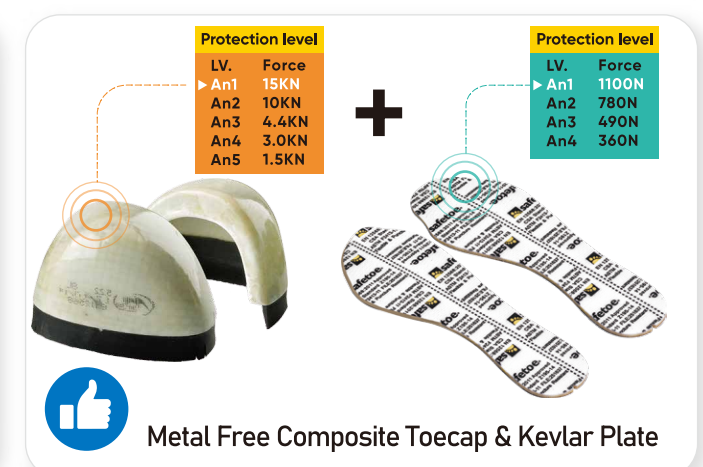

Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N

Metal Free Composite Toecap & Kevlar Plate

Light Weight

20%

Logistics & Warehouse



L-7571



L-7572

Breathable & Light-weight Safety Shoes

Upper : 3D Weaving Fabric+TPU Print
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : Flexible PU/PU Injection
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S1 PS FO SR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N

+

Light Weight

20%



L-7568




L-7570

Breathable & Light-weight Safety Shoes

Upper : 3D Weaving Fabric+TPU Print
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : Flexible PU/PU Injection
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S1 PS FO SR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




Breathable Fabric to Keep Feet Always Dry

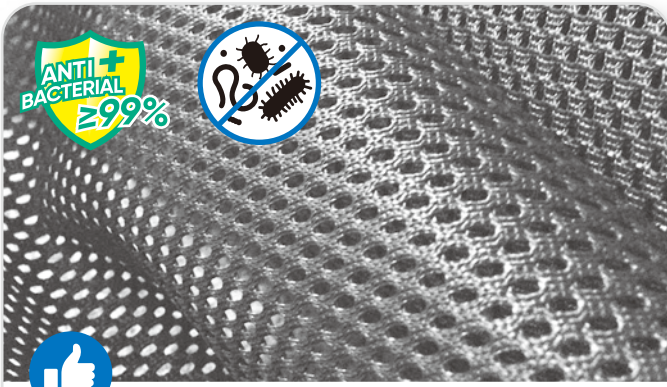

Anti-Bacterial & Odor Resistant Lining & Insoles



Manufactured with Germany Injection Technology

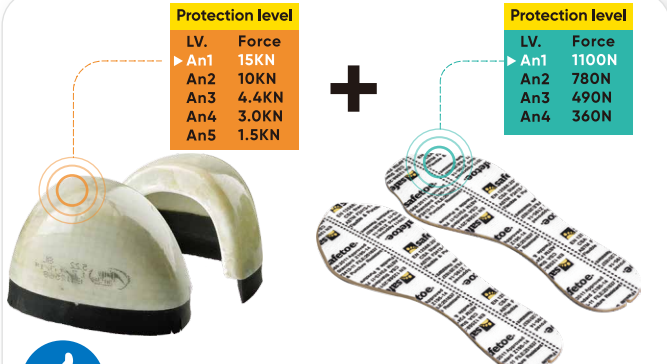

Metal Free Composite Toecap & Kevlar Plate

NEW
Design




L-7501



Light Weight & Flexible Safety Shoes

Upper : Durable 3D Weaving Nylon Fabric
 Lining : Breathable Sandwich Air Mesh
 Insole : Superior Memory Foam Insoles
 Outsole : Flexible PU/PU Dual Density
 Toecap : Steel Toecap
 Penetration : Steel Midsole Plate
 Size : EU 37-47# , UK 3-13# , US4-14#
 CE EN ISO 20345:2022 S1P SRC
 ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Grey





Green



Blue



L-7501 Velcro Design

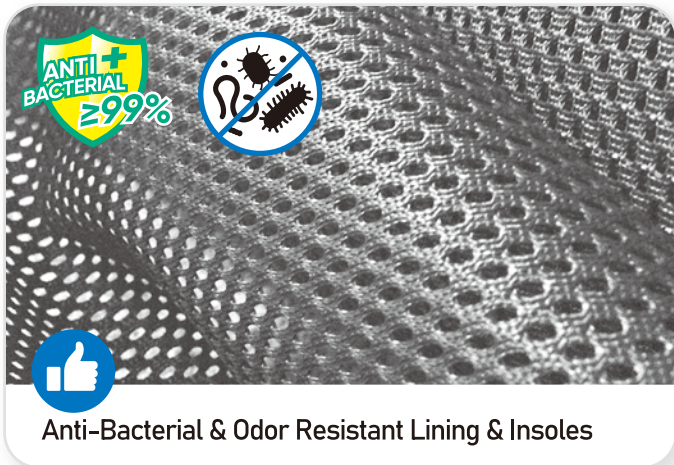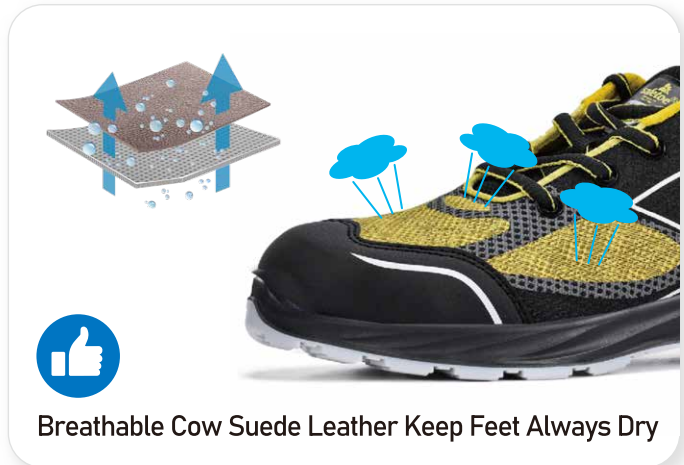

Protection level	Force
LV.	15KN
An1	10KN
An2	4.4KN
An3	3.0KN
An5	1.5KN

Protection level	Force
LV.	1100N
An1	780N
An2	490N
An4	360N



L-7512 Red S3 SRC

Upper: Water-Repellent PU-Tek Nylon
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022



L-7512 Blue S3 SRC

Upper: Water-Repellent PU-Tek Nylon
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022



M-8571 S3 SRC

Upper: Water-Repellent PU-Tek Nylon
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022



L-7530




M-8576



Light Weight & Flexible Safety Shoes

Upper : Durable 3D Weaving Nylon Fabric
Lining : Breathable Sandwich Air Mesh
Insole : Superior Memory Foam Insoles
Outsole : PU/PU Dual Density
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S1 PS SR FO ESD
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Breathable Fabric to Keep Feet Always Dry



Anti-Bacterial & Odor Resistant Lining & Insoles




Manufactured with Germany Injection Technology



Protection level	Force
LV.	15KN
An1	10KN
An2	4.4KN
An3	3.0KN
An4	1.5KN



Protection level	Force
LV.	1100N
An1	780N
An2	490N
An3	360N



Metal Free Composite Toecap & Kevlar Plate

TLS (Twist Lock System)

Safetoe's innovative TLS closure allows you to quickly tighten and loosen your safety footwear with one hand and under any conditions, even when you are wearing safety gloves. TLS ensures a fast, safe and easy precise fit that offers enhanced comfort and enables you to perform at your best.



L-7533 S1P SRC

Upper: Durable 3D Weaving Fabric
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022



M-8572 S1P SRC

Upper: Durable 3D Weaving Fabric
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022



L-7389 TLS SBP SRC

Twist lock system

Upper: Sanvlar-Tech Fly Knitting with TPU
Lining: Breathable Sandwich Mesh
Insole: Comfortable Hi-Poly Insoles
Outsole: EVA/Rubber Cement
Size: EU 37-47#, UK 3-13#
ASTM F2413-11 M I/75 C/75 PR EH



L-7501 TLS S1P SRC

Twist lock system

Upper : Sanvlar-Tech Fly Knitting Nylon Fabric
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Injection, Dual Density
Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022



L-7328 TLS S1P SRC

Twist lock system

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022




L-7329 TLS S1P SRC

Twist lock system

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/PU Dual Density
Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022





L-7530




Super Light Weight & Slip Resistant Safety Shoes

Upper : 3D Weaving Fabric+TPU Print
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : EVA/Rubber Cement
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S1 PS FO SR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




Breathable Fabric to Keep Feet Always Dry

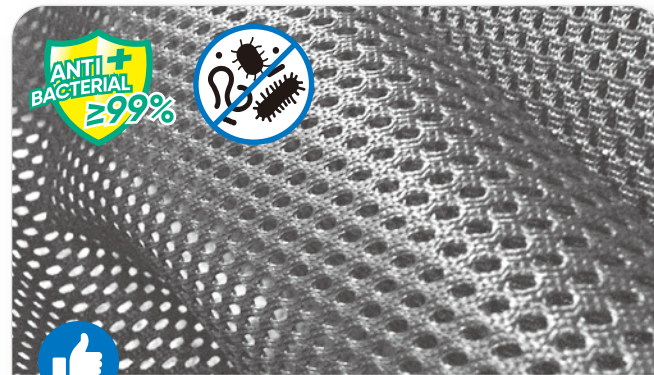

Anti-Bacterial & Odor Resistant Lining & Insoles



Light Weight EVA/Rubber Sole, Slip Resistant

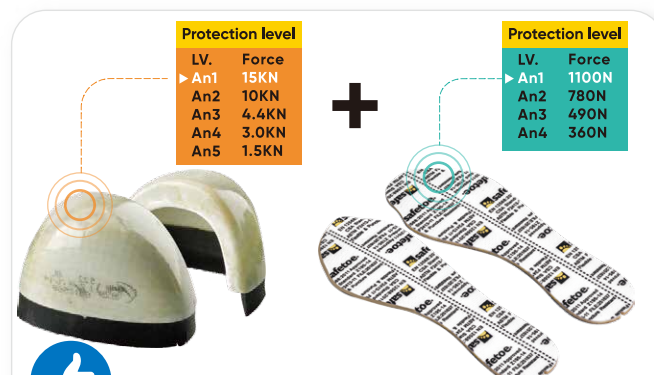

Metal Free Composite Toecap & Kevlar Plate



L-7368

SBP SRC

Upper : Sanvlar-Tech Fly Knitting Nylon Fabric
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : EVA/Rubber Cement
> Size : EU 38-46#, UK 4-12#
ASTM F2413-11 M I/75 C/75 PR EH



L-7390

SBP SRC

Upper : Sanvlar-Tech Fly Knitting With TPU
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : EVA/Rubber Cement
> Size : EU 37-47#, UK 3-13#
ASTM F2413-11 M I/75 C/75 PR EH



L-7389

SBP SRC

Upper : Sanvlar-Tech Fly Knitting With TPU
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-Polyu Insoles
Outsole : EVA/Rubber Cement
> Size : EU 37-47#, UK 3-13#
ASTM F2413-11 M I/75 C/75 PR EH



L-7539

S1P SRC

Upper: Durable 3D Weaving Fabric
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: EVA/Rubber Cement
> Size : EU 38-46#, UK 4-12#
ASTM F2413-11 M I/75 C/75 PR EH






In Stock
M-8553



Water Resistant Women Design Safety Boots

Upper : Full Grain Cow Nubuck Leather
Lining : Water Resistant Sanvlar-tech Membrane
Insole : Super Memory Foam Insoles
Outsole : PU/Nitrile Rubber Injection (300°C HRO)
Toecap : Steel Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 SB PS SR WR CI HI FO HRO EH
ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)

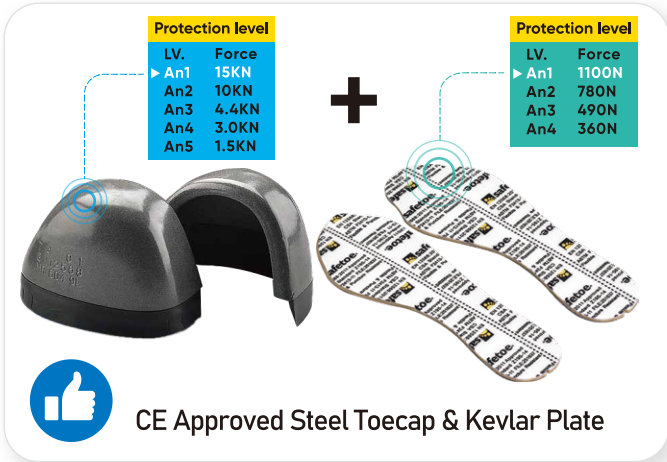

In Stock



In Stock



In Stock



In Stock



L-7508ws S1P SRC

Upper: Grey Cow Suede Leather
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
> Size : EU 36-42#, UK 2-8#
ASTM F2413-11 M I/75 C/75 PR



M-8516ws S1P SRC

Upper: Grey Cow Suede Leather
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
> Size : EU 36-42#, UK 2-8#
ASTM F2413-11 M I/75 C/75 PR



L-7508w S3 SRC


Upper: Cow Embossed Leather
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
> Size : EU 36-42#, UK 2-8#
ASTM F2413-11 M I/75 C/75 PR



M-8516w S3 SRC

Upper: Cow Embossed Leather
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: PU/PU Dual Density
> Size : EU 36-42#, UK 2-8#
ASTM F2413-11 M I/75 C/75 PR



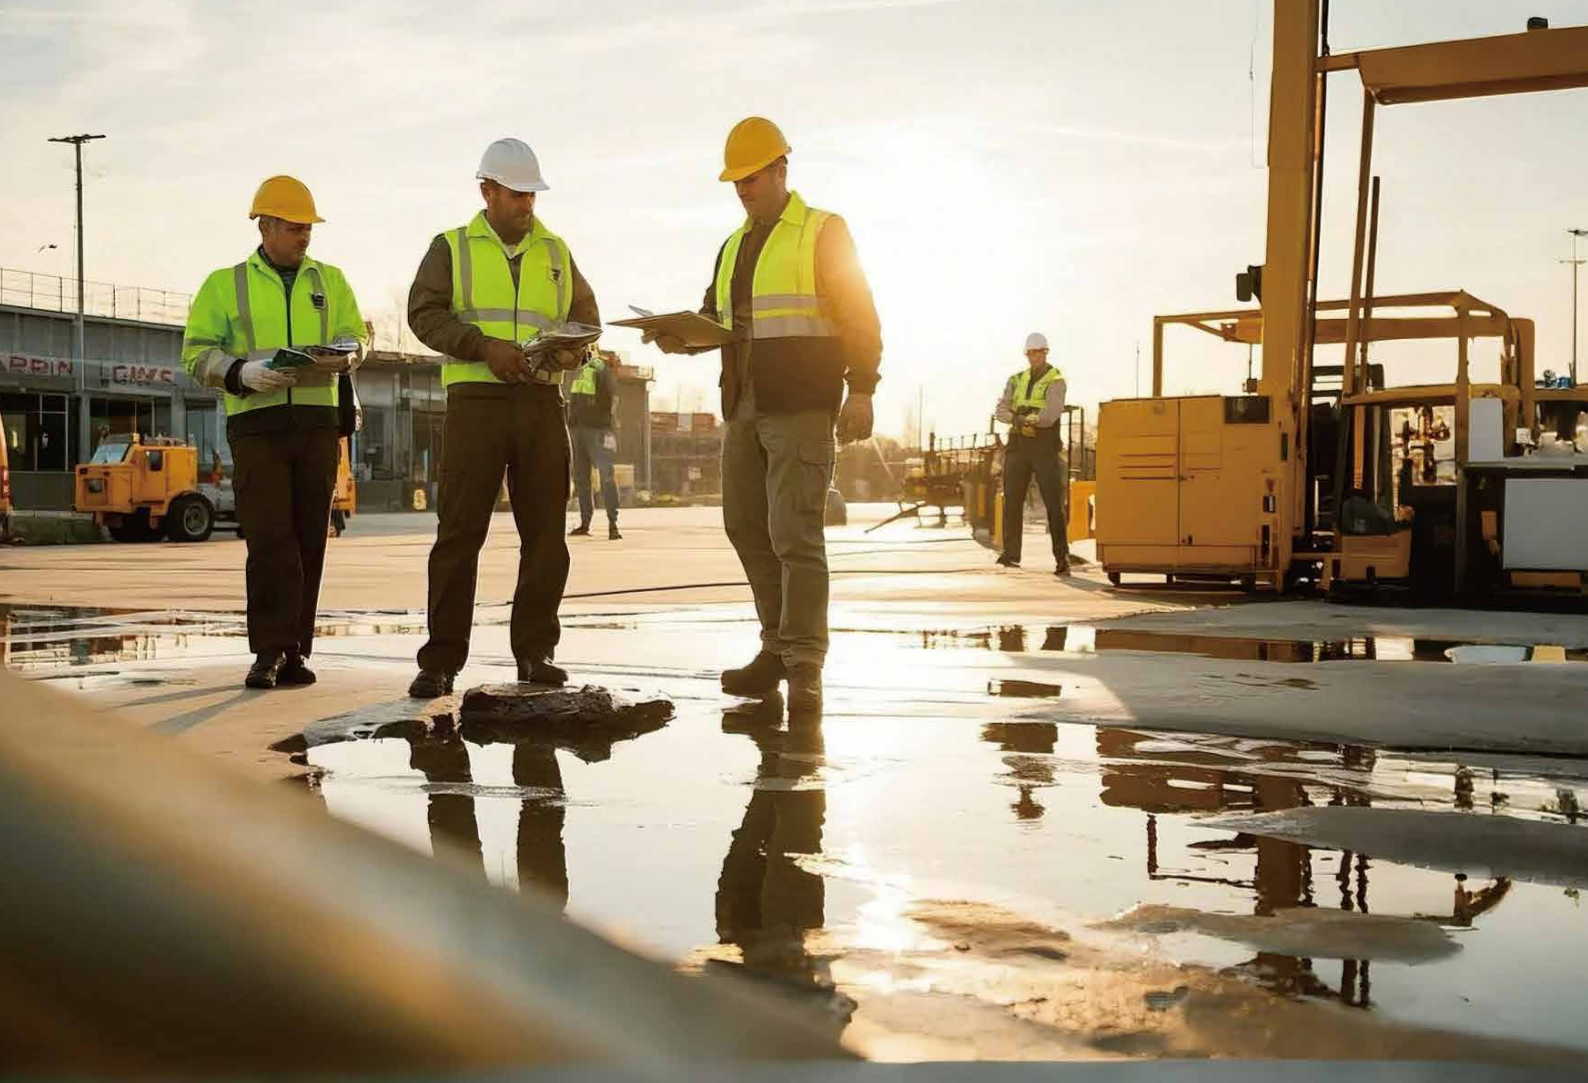

Hot Best Selling

In Stock



M-8356RB



Twist Lock System




M-8356RB TLS

Super S3 Safety Boots (Metal Free)

Upper : Full Grain Smooth Cow Leather
 Lining : Breathable Sandwich Mesh
 Insole : Super Memory Foam Insoles
 Outsole : PU/Nitrile Rubber Injection (300°C HRO)
 Toecap : Composite Toecap
 Penetration : Kevlar Midsole Plate
 Size : EU 37-47#, UK 3-13#, US4-14#
 CE EN ISO 20345:2022+A1:2024 S3S SR CI HI FO HRO
 ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)



Water Resistant Cow Leather

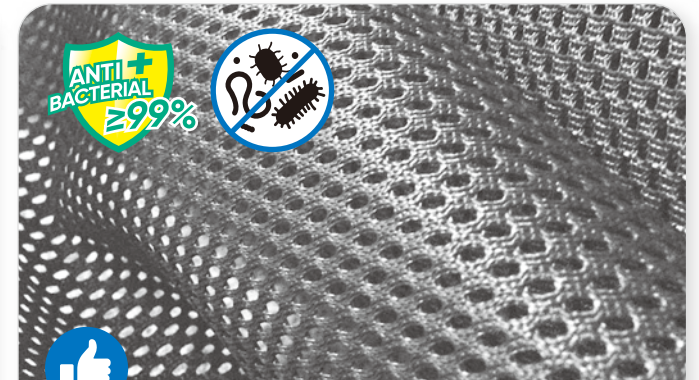


Anti-Bacterial & Odor Resistant Lining & Insoles



Slip Resistance

Slip Resistant & Abrasion Resistant & Heat Resistant

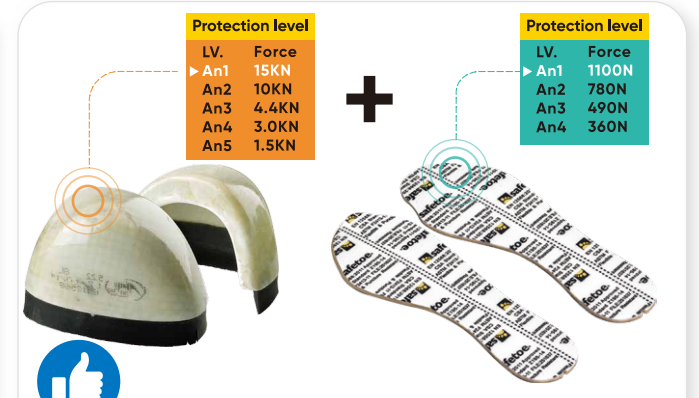

Metal Free Composite Toecap & Kevlar Plate



L-7342 Black S3 SRC

Upper : Full Grain Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
ASTM F2413-11 M I/75 C/75 PR



L-7342 S3 SRC

Upper : High Quality Cow Nubuck Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022



M-8361 Black S3 SRC

Upper : High Quality Smooth Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022



M-8361 S3 SRC

Upper : High Quality Cow Nubuck Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022 ASTM F2413-11 M I/75



M-8307 Black S3 SRC

Upper : High Quality Smooth Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE ISO 20345:2022 ASTM F2413-11 M I/75



M-8307 S3 SRC

Upper : High Quality Cow Nubuck Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE EN 20345:2022 ASTM F2413-11 M I/75 C/75 PR



M-8393 S3 SRC

Upper : High Quality Smooth Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/Rubber Injection
> Size : EU37-47#,UK 3-13#
CE EN ISO 20345:2022 ASTM F2413-11 M I/75 C/75 PR



M-8370 S3 SRC

Upper : High Quality Smooth Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU/Rubber Injection
> Size : EU37-47#,UK 3-13#
CE EN ISO 20345:2022 ASTM F2413-11 M I/75 C/75 PR





In Stock

Yellow


Black



M-8377

Water Resistant Work Boots with Zip

Upper : Full Grain Nubuck Cow Leather
 Lining : Breathable Sandwich Mesh
 Insole : Super Memory Foam Insoles
 Outsole : PU/Nitrile Rubber Injection (300°C HRO)
 Toecap : Composite Toecap
 Penetration : Kevlar Midsole Plate
 Size : EU 37-47#, UK 3-13#, US4-14#
 CE EN ISO 20345:2022+A1:2024 S3S SR CI HI FO HRO
 ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)



Scuff Cap Abrasion TPU Protector



Water Resistant Sanvlar-Tex Membrane Liner



Slip Resistant & Abrasion Resistant & Heat Resistant



CE S1P Approved Steel Toecap & Steel Plate

Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N





In Stock




M-8552



L-7578

Water Resistant & Slip Resistant Work Boots

Upper : Full Grain Crazy Horse Cow Nubuck Leather
Lining : Water Resistant Sanvlar-tex Membrane
Insole : Super Memory Foam Insoles
Outsole : PU/Nitrile Rubber Injection (Anti-Slip)
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S7S SR CI HI FO HRO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




100% Genuine Full Grain Cow Leather



Water Resistant Sanvlar-Tex Membrane Liner



Slip Resistant & Abrasion Resistant & Heat Resistant

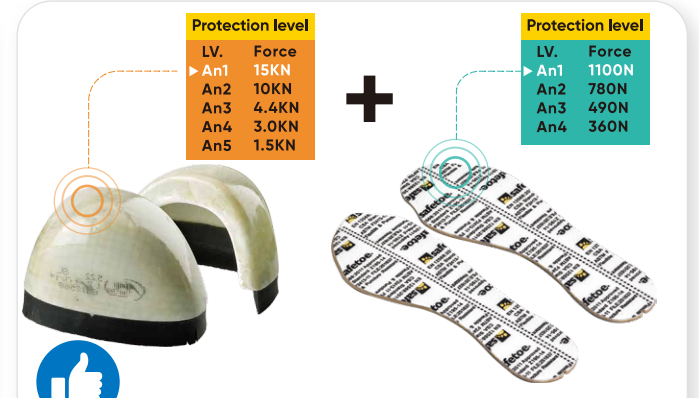

Metal Free Composite Toecap & Kevlar Plate

Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

+

Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N



PH: 0.3-11.4
Anti-Chemical

Chemical & Pharmaceutical Industry



Best Recommended:

Recommended to use:
Fertilizer Plants, Detergent Plants,
Pigment Factory, Phosphate, Biological
laboratory, Pharmaceutical Research ,
Pharmaceutical production etc



 In Stock

M-8565




PH: 0.3-11.4
Anti-Chemical



EN 13832-3

Water Resistant & Chemical Resistant Work Boots



Upper : Full Grain Smooth Cow Leather
Lining : Water Resistant Sanvlar-tex Membrane
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (Anti-Slip)
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022 S7S SR CI HI FO HRO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




Water Resistant Cow Leather




Water Resistant Sanvlar-Tex Membrane Liner



Slip Resistant & Abrasion Resistant & Heat Resistant

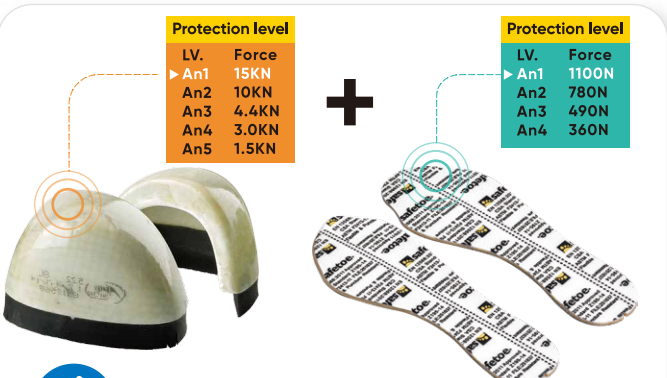

Metal Free Composite Toecap & Kevlar Plate

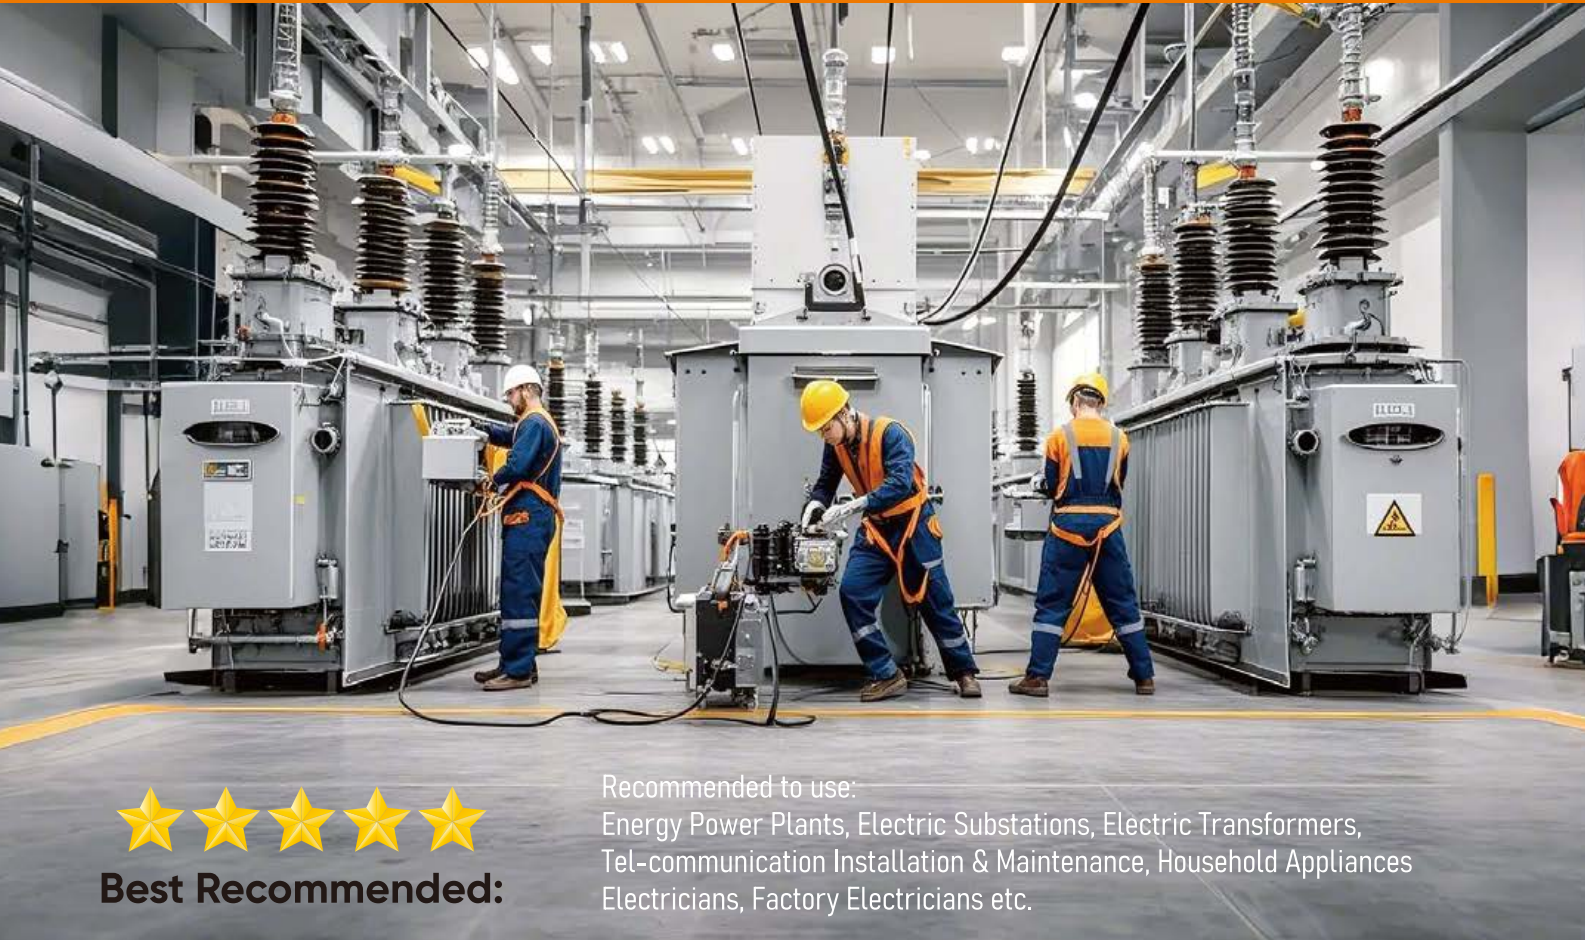

Best Recommended:


Recommended to use:
Energy Power Plants, Electric Substations, Electric Transformers,
Tel-communication Installation & Maintenance, Household Appliances
Electricians, Factory Electricians etc.



Electric Hazard 18KV



✓ Protection Against Electric Hazard (EH 18KV)		
ASTM F2412-18a, Clause 9, Test Period 1 Minute		
Test Requirement		Result
Electric Leakage Current with Test Voltage 18KV	≤ 1.0mA	PASS
Remark		
Expended Uncertainty: 0.0045mA, With k= 2.17 at 95% Confidence Level.		

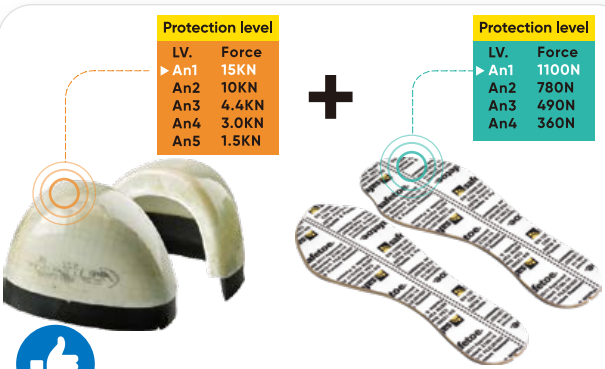

Metal Free Composite Toecap & Kevlar Plate



Slip Resistant & Abrasion Resistant & Heat Resistant

 In Stock



M-8356 RB EH SBP+I

Upper : Full Grain Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022 ASTM F2413-11 M I/75 C/75 PR EH



L-7296 EH SBP+I

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7296 EH SBP+I

Upper : Breathable Cow Suede Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



200 Joule Toecap



Anti-Nail Midsole



Electric Hazard 18KV



Non-Magnetic



Anti-Fatigue



Slip Resistance



Light Weight



MEMORY FOAM AIR COOL INSOLE




**360°
U-Design
Stability**



BREATHABLE MESH

SUPERIOR SOFT FOAM

ANTI-ABRASION PU

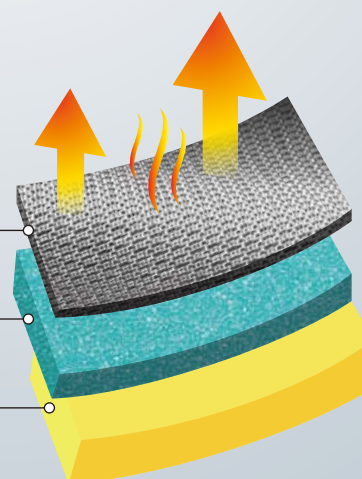

Safetoe Insock List



J-001 Size:36-48#
Thickness:2.5/3.5mm
Material:EVA



J-002 Size:36-48#
Thickness:3.5/4.5mm
Material:Enhanced EVA



J-003 Size:36-48#
Thickness:3.5/4.5mm
Material:EVA/EVA



J-005 Size:36-48#
Thickness:4.0/5.0mm
Material:Soft Hi-polyu



J-006 Size:36-48#
Thickness:4.0/5.0mm
Material:EVA/Foam/Gel



J-009 Size:36-48#
Thickness:4.5/6.0mm
Material:PU Injection



J-008 Size:36-48#
Thickness:4.5/5.5mm
Material:Memory Foam



J-004 Size:36-48#
Thickness:4.5/6.0mm
Material:Memory Foam+PU



J-016 Size:36-48#
Thickness:4.5/6.0mm
Material:Memory Foam

In Stock

In Stock

In Stock

 In Stock



STANDARD
100

SAFETOE Natural Cotton Socks

1. Super soft cotton-rich fabric
2. Sweat-wicking and breathable
3. Durable and comfortable
4. Close fitting and non-slip
5. Heavy duty quality



Women Socks

Winter Socks



L-7520

S3 SRC

Upper: Black Full Grain Cow Leather
Lining: Breathable Sandwich Air Mesh
Insoles: Super Memory Foam Insoles
Outsole: EVA/Rubber Cement
> Size : EU 36-47#, UK 2-13#
CE EN ISO 20345:2022



L-7144

S3 SRC

Upper: Black Smooth Cow Leather
Lining: Breathable Sandwich Air Mesh
Insoles: Soft Hi-Polyu Insoles
Outsole: PU/PU Dual Density
> Size : EU 36-47#, UK 2-13#
CE EN ISO 20345:2022



L-7250

S3 SRC

Upper: Black Smooth Cow Leather
Lining: Anti-Abrasion Pigskin Leather
Insoles: Soft Hi-Polyu Insoles
Outsole: PU Injection
> Size : EU 36-47#, UK 2-13#
CE EN ISO 20345:2022



L-7527

S3 SRC

Upper: Black Smooth Cow Leather
Lining: Anti-Abrasion Pigskin Leather
Insoles: Soft Hi-Polyu Insoles
Outsole: PU Injection
> Size : EU 36-47#, UK 2-13#
CE EN ISO 20345:2022





L-7163 RB



M-8027 RB

Hot Best Selling



L-7006 RB

S3 SR

Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : Hot-Resistant Rubber Cement

> Size : EU 37-47#, UK 3-13#

CE EN ISO 20345:2022 S3 SR FO HRO



Heavy Duty S3 Safety Shoes

Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-polyu Insoles
Outsole : Rubber Cement Soles
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S3 SR FO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



M-8010 RB

S3 SR

Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : Hot-Resistant Rubber Cement

> Size : EU 37-47#, UK 3-13#

CE EN ISO 20345:2022 S3 SR FO HRO



L-7222 RB

S3 SR

Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : Hot-Resistant Rubber Cement

> Size : EU 37-47#, UK 3-13#

CE EN ISO 20345:2022 S3 SR FO HRO



Thread Stitching Technology, Double Safety



Anti-Bacterial & Odor Resistant Lining & Insoles



Rubber Cement Sole With Kevlar Thread Stitching



CE S3 Approved Steel Toecap & Steel Plate



Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN



Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N



M-8215 RB

S3 SR

Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : Hot-Resistant Rubber Cement

> Size : EU 37-47#, UK 3-13#

CE EN ISO 20345:2022 S3 SR FO HRO





Best Recommended:

Recommended to use:

Metal Welding, Metal Cutting, Metal Polishing,
Steel Structure Construction, Steel Smelting,
Aluminum Smelting, Copper Smelting, Glasses
Smelting & other Related Industry



Fire Sparkle Resistant

M-8387

Hot Best Selling

In Stock




Heat Resistant Welding S3 Work Boots


Upper : Full Grain Cow Leather + Anti-Sparkle Leather Cover
Thread : Fire-resistant Kelvar Stitching
Lining : Beathable Sandwich Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (300°C HRO)
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022 S3S SR CI HI FO HRO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)




Overcap Design for Extra Toe Protection

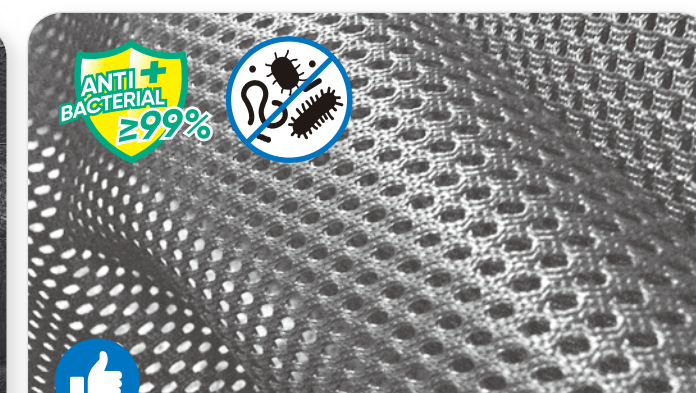

Anti-Bacterial & Odor Resistant Lining & Insoles

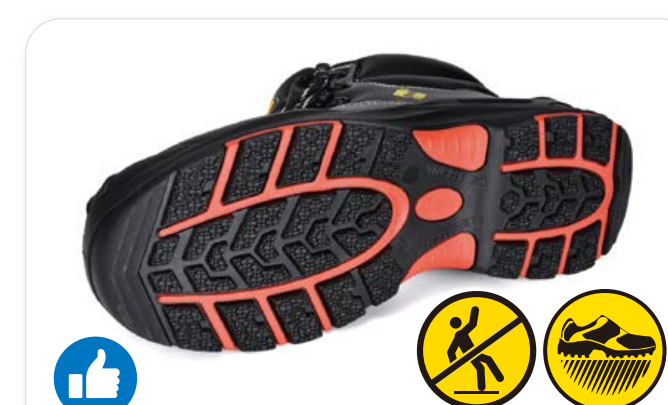

Slip Resistant & Abrasion Resistant & Heat Resistant

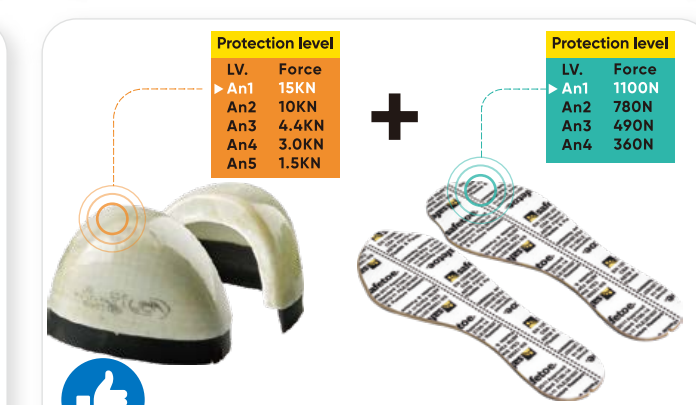

Metal Free Composite Toecap & Kevlar Plate



Metatarsal Protection

Safetoe metatarsal protection boots are designed to provide extra protection and support device on foot metatarsal area. These boots with reinforced device can help to shield metatarsal bones from impact and injury. Safetoe metatarsal protection boots are very suitable for those workplaces with dropping objects frequently, such as Mining, Mechanical Parts, Metal Cutting, Car Tyre, Woodwork etc.



M-8387MP S3 SR

Upper : High Quality Embossed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (300°C HRO)
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022 S3 SR FO HRO



M-8552MP S3 SR

Upper : Full Grain Cow Crazy Horse Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (300°C HRO)
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022 S3 SR FO HRO



H-9552MP S3 SR

Upper : Full Grain Cow Crazy Horse Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (300°C HRO)
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022 S3 SR FO HRO





M-8179



M-8173

Classical Wedge Steel Toe Work Boots

Upper : Full Grain Cow Nubuck Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : Goodyear Welted Rubber Sole
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
ASTM F2413-18 M I/75 C/75 PR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)



Heavy Duty Original Cow Nubuck Leather



Anti-Bacterial & Odor Resistant Lining & Insoles



Slip-Resistant Goodyear Welted Rubber Sole




ASTM Approved Steel Toecap & Steel Plate



Cold Resistance

Welding Industry

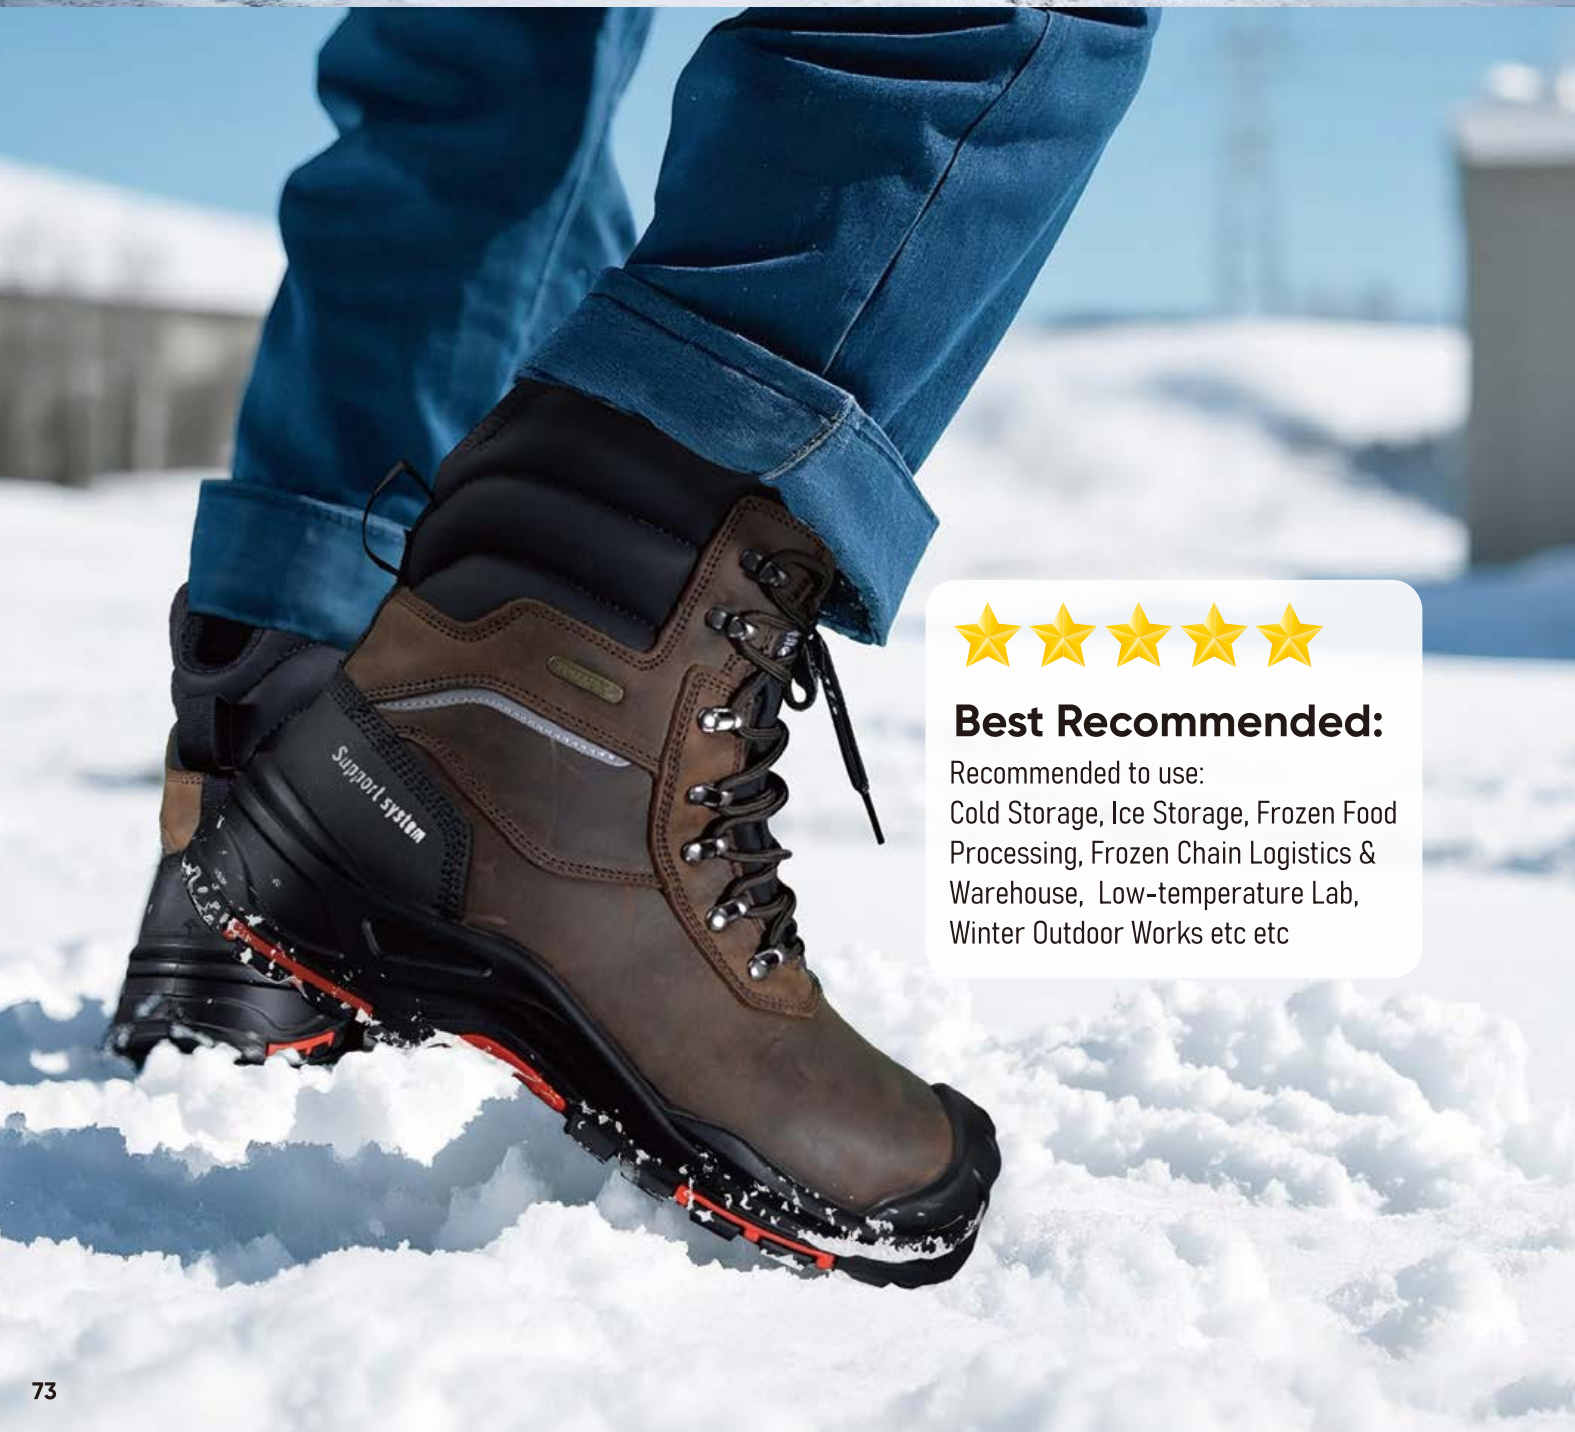

Best Recommended:

Recommended to use:
Cold Storage, Ice Storage, Frozen Food Processing, Frozen Chain Logistics & Warehouse, Low-temperature Lab, Winter Outdoor Works etc etc

Hot Best Selling

In Stock

H-9552



Cold Resistance



Cold Resistant & Water Resistant Work Boots

Upper : Full Grain Crazy Horse Cow Nubuck Leather
Lining 1: Water Resistant Sanvlar-tex Membrane
Lining 2: 3M Thinsulate Insulation (-30°C Cold Resistant)
Insole : Super Memory Foam Insoles
Outsole : Slip Resistant PU/Nitrile Rubber Injection
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022+A1:2024 S7S SR CI HI FO HRO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




Water Resistant Cow Leather



Water Resistant Sanvlar-Tex Membrane Liner



Slip Resistant & Abrasion Resistant & Heat Resistant

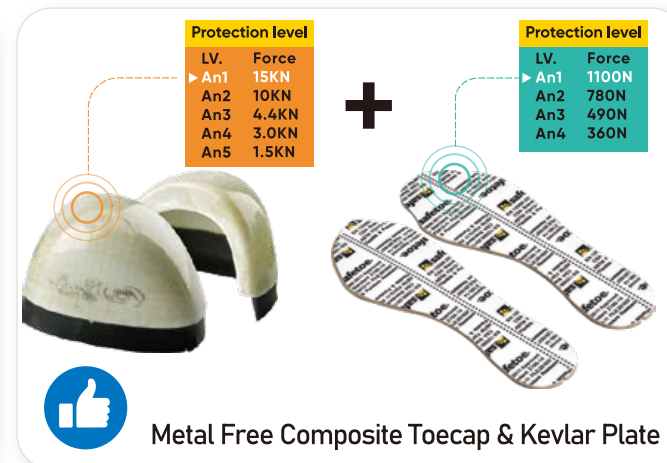

Metal Free Composite Toecap & Kevlar Plate

Protection level	
LV.	Force
▶ An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

+

Protection level	
LV.	Force
▶ An1	1100N
An2	780N
An3	490N
An4	360N



Oil & Gas Industry



Best Recommended:

Recommended to use:
Oil & Gas Exploitation, Petroleum Smelting,
Petrochemical, Natural Gas Station,
Liquefied Petroleum Gas etc.



In Stock

H-9437



H-9441




S3 Oil Resistant & Slip Resistant Safety Boots

Upper : Full Grain Crazy Horse Cow Nubuck Leather
Lining : Breathable Sandwich Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Nitrile Rubber Injection (Anti-Slip)
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
Whole Height: 31 cm/ 12 inch (Size 42 for reference)
CE EN ISO 20345:2022+A1:2024 S3S SR CI HI FO HRO
ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)




Heavy Duty Original Cow Nubuck Leather

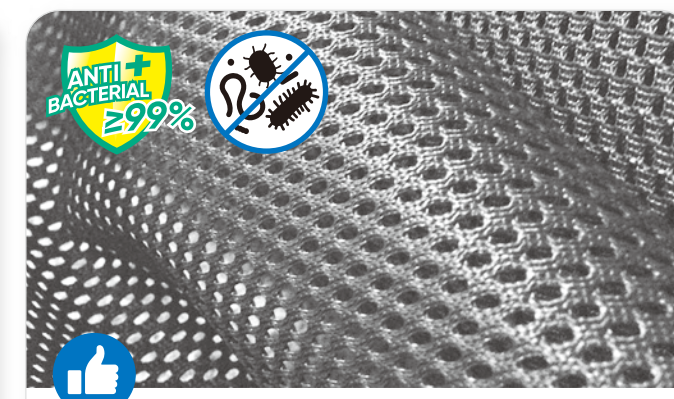

Anti-Bacterial & Odor Resistant Lining & Insoles



Slip Resistant & Abrasion Resistant & Heat Resistant

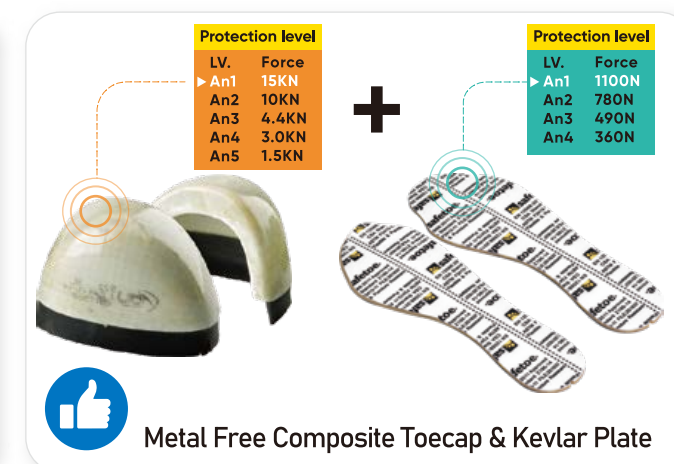

Metal Free Composite Toecap & Kevlar Plate



H-9430



H-9430

H:31CM



H-9430



H-9430

H:27CM

High Rigger S3 Work Boots

Upper : High Quality Palm Printed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-polyu Insoles
Outsole : PU/PU Dual Density(Desma Injection)
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022 S3 SR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




High Rigger S3 Work Boots

Upper : High Quality Palm Printed Cow Leather
Lining : Breathable Sandwich Air Mesh
Insole : Soft Hi-polyu Insoles
Outsole : PU/PU Dual Density(Desma Injection)
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022 S3 SR
ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)




Water Resistant Cow Leather

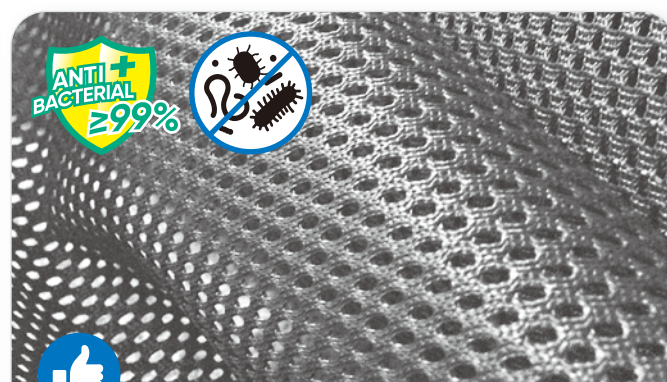

Anti-Bacterial & Odor Resistant Lining & Insoles



Water Resistant Cow Leather

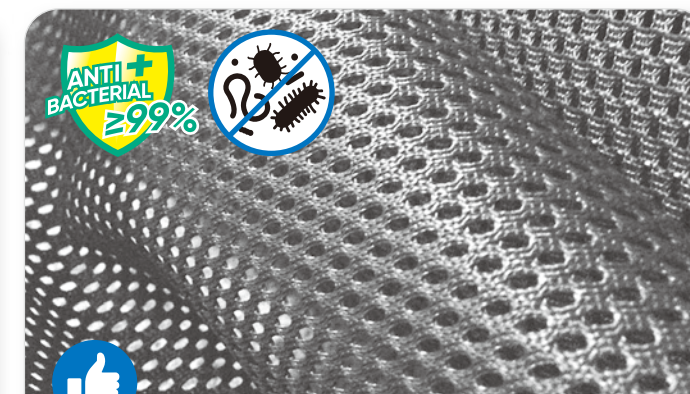

Anti-Bacterial & Odor Resistant Lining & Insoles



Slip Resistant & Abrasion Resistant



CE S3 Approved Steel Toecap & Steel Plate



Slip Resistant & Abrasion Resistant



CE S3 Approved Steel Toecap & Steel Plate

Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN



Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N

Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN



Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N



Slip Resistant PU/Rubber Sole

Heavy Duty Nitrile Rubber Soles are Designed with Slip Resistant & Cold Resistant



Winter Warm Wool Fur

-30°C Cold Resistant Genuine Fur Keep You Warm in Winter Season, even in Snow Season



M-8550 Winter S3 SRC

Upper: High Quality Embossed Cow Leather
Lining: Warm Lamb Fur
Insoles: Soft Hi-Polyu Insoles
Outsole: PU/PU Dual Density
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



Hot Best Selling



M-8027 Winter S3 SRC

Upper: High Quality Embossed Cow Leather
Lining: Warm Lamb Fur
Insoles: Soft Hi-Polyu Insoles
Outsole: PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



H-9439 Winter S3 SRC

Upper: High Quality Embossed Cow Leather
Lining: Warm Lamb Fur
Insoles: Soft Hi-Polyu Insoles
Outsole: PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8551 Winter S3 SRC

Upper: High Quality Embossed Cow Leather
Lining: Warm Lamb Fur
Insoles: Soft Hi-Polyu Insoles
Outsole: PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



H-9550 Winter S3 SRC

Upper : Full Grain Cow Leather
Lining : Warm Lamb Fur
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



M-8573 Winter S3 SRC

Upper: High Quality Embossed Cow Leather
Lining: Warm Lamb Fur
Insoles: Soft Hi-Polyu Insoles
Outsole: PU/Rubber Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022






H-9425 Winter S3 SRC

Upper: High Quality Embossed Cow Leather
 Lining: Warm Lamb Fur
 Insoles: EVA+ Lamb Fur
 Outsole: PU/Rubber Injection
 Whole Height: 31CM or 12.2 inch
 > Size : EU 37-47#, UK 3-13#
 CE EN ISO 20345:2022



Class 1 Chainsaw Protection

EN ISO 17249 Approved Chainsaw Protection Quality Boots for Wood Workers

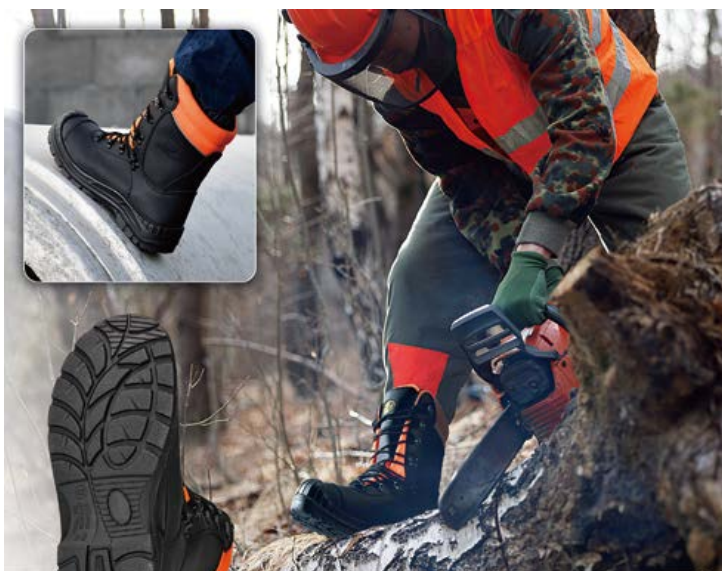

Slip Resistant PU/Rubber Sole

Heavy Duty Nitrile Rubber Soles are Designed with SRC Slip Resistant & Abrasion Resistant



H-9425 Short Winter S3 SRC

Upper: High Quality Embossed Cow Leather
 Lining: Warm Lamb Fur
 Insoles: EVA+ Lamb Fur
 Outsole: PU/Rubber Injection
 Whole Height: 26CM or 10.4 inch
 > Size : EU 37-47#, UK 3-13#
 CE EN ISO 20345:2022




1.6-1.8mm
 100% Breathable
 Full-Grain Cow Leather

Heavy Duty Genuine Cow Leather

1.6-1.8mm Thickness

High Quality Full Grain Cow Leather are with Water & Snow Resistant Coating

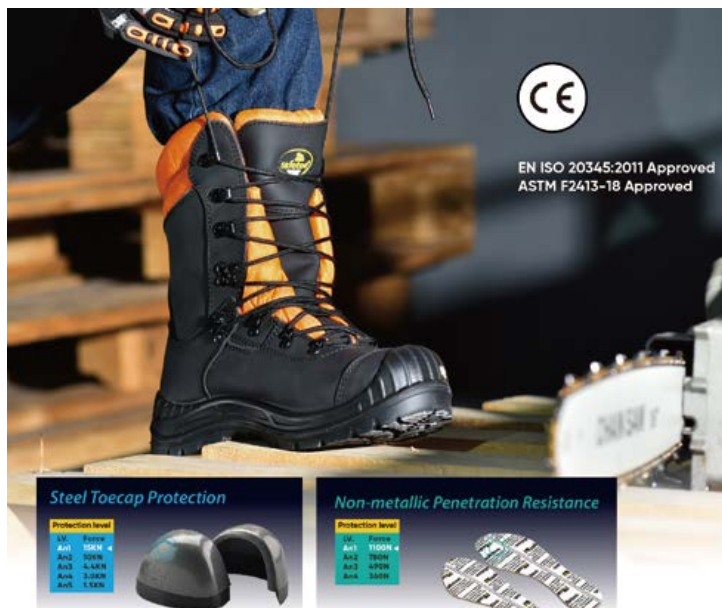

S3 Steel toe & Kelvar Plate

CE EN20345 S3 Approved Steel toe for Toe Protection & Kelvar Plate for Penetration Resistant



H-9426 Short Winter S3 SRC

Upper: High Quality Embossed Cow Leather
 Topline: Oxford Fabric with Adjustable Cord
 Lining: Warm Lamb Fur
 Insoles: EVA+ Lamb Fur
 Outsole: PU/Rubber Injection
 > Size : EU 37-47#, UK 3-13#
 CE EN ISO 20345:2022



In Stock



LMZ9051088 S3 SRC

Upper : Full Grain Cow Nubuck Leather
 Lining : Breathable Sandwich Mesh
 Insole : Super Memory Foam Insoles
 Outsole : PU/Rubber Injection
 > Size : EU 37-47#, UK 3-13#
 CE EN ISO 20345:2022 CE EN ISO 17249:2013



Hot Best Selling

In Stock



M-8515 S3 SR

Tactical Design Steel Toe Work Boots

Upper : Full Grain Smooth Cow Leather
 Lining : Breathable Sandwich Air Mesh
 Insole : Super Memory Foam Insoles
 Outsole : PU/Nitrile Rubber Injection (HRO 300°C)
 Toecap : Steel Toecap
 Penetration : Steel Midsole Plate
 Size : EU 37-47#, UK 3-13#, US4-14#
 CE EN ISO 20345:2022 S3 SR HRO
 ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Heavy Duty Original Full Grain Cow Leather



Anti-Bacterial & Odor Resistant Lining & Insoles



Slip Resistant & Abrasion Resistant & Heat Resistant



CE S3 Approved Steel Toecap & Steel Plate

Hot Best Selling

In Stock



H-9438 S3 SR/OB SR

Tactical Design Steel Toe Work Boots

Upper : Full Grain Smooth Cow Leather
 Lining : Breathable Sandwich Air Mesh
 Insole : Super Memory Foam Insoles
 Outsole : PU/Nitrile Rubber Injection (HRO 300°C)
 Toecap : Steel Toecap
 Penetration : Steel Midsole Plate
 Size : EU 37-47#, UK 3-13#, US4-14#
 CE EN ISO 20345:2022 S3 SR HRO
 ASTM E 2149-2020 Approved Anti-microbial Lining & Insole (Odor Resistant)



Heavy Duty Original Full Grain Cow Leather



Anti-Bacterial & Odor Resistant Lining & Insoles



Slip Resistant & Abrasion Resistant & Heat Resistant



CE S3 Approved Steel Toecap & Steel Plate

Design for food Industry



L-7019 BLACK S2 SRC

Upper : High Quality Water-Resistant Micro Fiber
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



Hot Best Selling



L-7019 S2 SRC

Upper : High Quality Water-Resistant Micro Fiber
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7096 BLACK SB SRC

Upper : High Quality Water-Resistant Micro Fiber
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7096 SB SRC

Upper : High Quality Water-Resistant Micro Fiber
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7201 S2 SRC


Upper : High Quality Water-Resistant Micro Fiber
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



L-7196 S2 SRC

Upper : High Quality Water-Resistant Micro Fiber
Lining : Breathable Sandwich Air Mesh
Insole : Comfortable Mesh Coated EVA
Outsole : PU Injection
> Size : EU 37-47#, UK 3-13#
CE EN ISO 20345:2022



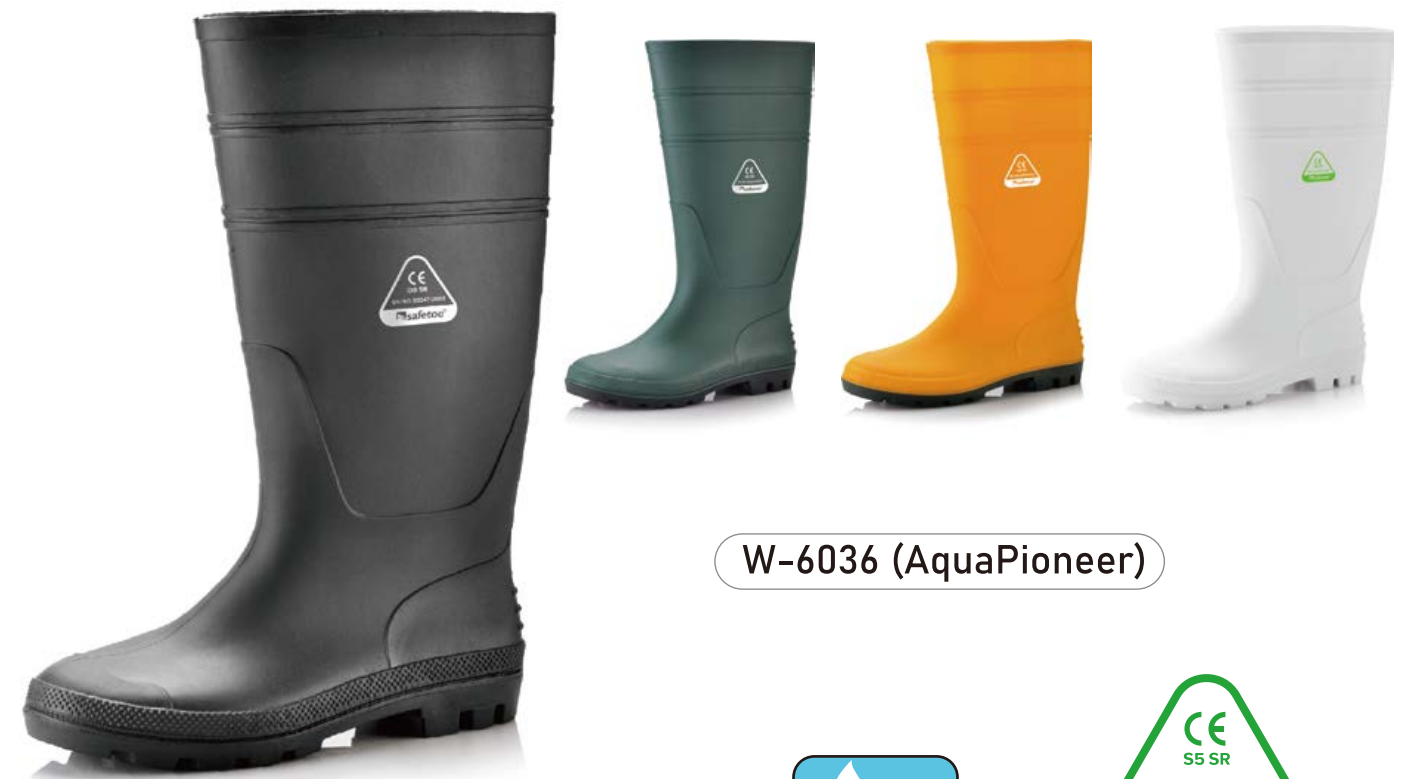

W-6036 (AquaPioneer)

Light Duty Safety Wellington Boots


Upper : Water Resistant PVC Material
Lining : Soft Fabric Mesh
Insoles: Breathable & Shock Absorption Insoles
Outsole : High Quality PVC Material
Height : 38.5cm / 15 inch (Size 42# for reference)
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20347:2022 OB SR
Application : Construction, Chemical, Food Industry, Catering, Cleaning, Farm & Garden, Food Storage etc



Water Resistant Seamless PVC Injection Technology



Abrasion Resistant and Quick-Dry Lining

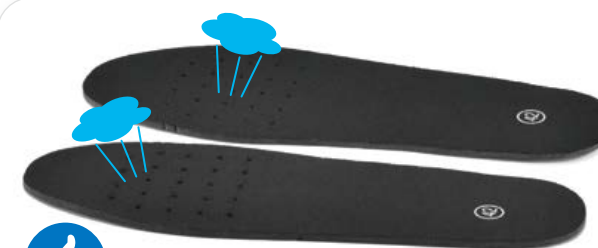


Breathable & Removable & Shock Absorption Insoles



Slip Resistant & Abrasion Resistant Outsole



W-6037 (AquaPioneer)




Heavy Duty S5 Safety Wellington Boots

Upper : Water Resistant PVC Material
 Lining : Soft Fabric Mesh
 Insoles: Breathable & Shock Absorption Insoles
 Outsole : High Quality PVC Material
 Toecap : Steel Toecap
 Penetration : Steel Midsole Plate
 Height : 38.5cm / 15 inch (Size 42# for reference)
 Size : EU 37-47#, UK 3-13#, US4-14#
 CE EN ISO 20345:2022 S5 SR
 Application : Construction, Chemical, Food Industry, Catering, Cleaning, Farm & Garden, Food Storage etc



W-6038 (AquaPioneer)





Heavy Duty S5 Safety Wellington Boots

Upper : Water Resistant PVC Material
 Lining : Soft Fabric Mesh
 Insoles: Breathable & Shock Absorption Insoles
 Outsole : High Quality PVC Material
 Toecap : Steel Toecap
 Penetration : Steel Midsole Plate
 Height : 38.5cm / 15 inch (Size 42# for reference)
 Size : EU 37-47#, UK 3-13#, US4-14#
 CE EN ISO 20345:2022 S5 SR
 Application : Construction, Chemical, Food Industry, Catering, Cleaning, Farm & Garden, Food Storage etc





W-6055 (AquaPioneer)

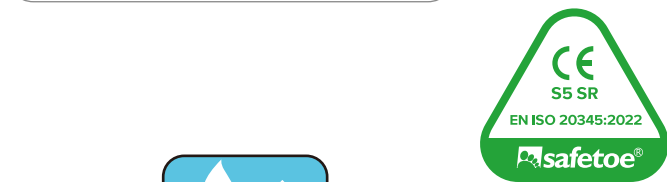

Heavy Duty S5 Safety Rain Boots

Upper : Water Resistant PVC Material
Lining : Soft Fabric Mesh
Insoles: Breathable & Shock Absorption Insoles
Outsole : High Quality PVC Material
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Height : 38.5cm / 15 inch (Size 42# for reference)
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022 S5 SR
Application : Construction, Chemical, Food Industry, Catering, Cleaning, Farm & Garden, Food Storage etc

Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

+

Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N

CE S5 Approved Steel Toecap & Steel Plate


Abrasion Resistant and Quick-Dry Lining

Breathable & Removable & Shock Absorption Insoles

Slip Resistant & Abrasion Resistant Outsole



W-6050 (AquaPioneer)



Heavy Duty S5 Safety Rain Boots

Upper : Water Resistant PVC Material
Lining : Soft Fabric Mesh
Insoles: Breathable & Shock Absorption Insoles
Outsole : High Quality PVC Material
Toecap : Steel Toecap
Penetration : Steel Midsole Plate
Height : 17cm / 6.8 inch (Size 42# for reference)
Size : EU 37-47#, UK 3-13#, US4-14#
CE EN ISO 20345:2022 S5 SR
Application : Construction, Chemical, Food Industry, Catering, Cleaning, Farm & Garden, Food Storage etc

Protection level	
LV.	Force
An1	15KN
An2	10KN
An3	4.4KN
An4	3.0KN
An5	1.5KN

+

Protection level	
LV.	Force
An1	1100N
An2	780N
An3	490N
An4	360N

CE S5 Approved Steel Toecap & Steel Plate

Abrasion Resistant and Quick-Dry Lining

Breathable & Removable & Shock Absorption Insoles

Slip Resistant & Abrasion Resistant Outsole



EUROPEAN STANDARDS



EN ISO 21420 GENERAL REQUIREMENTS

The pictogram indicates that the user has to consult the Instructions of use. EN ISO 21420 lays out the general requirements of most types of protective gloves as: ergonomics, construction (PH neutrality: shall be greater than 3.5 and less than 9.5, amount of detectable chrome VI, less than 3mg/kg and no allergenic substances), electrostatic properties, innocuousness and comfort (size).

Selection of the protective glove size according to hand length

Glove size	Minimal length (mm)
6	220
7	230
8	240
9	250
10	260
11	270



EN 388 PROTECTION AGAINST MECHANICAL RISKS

The figures in the table for EN standards indicate results of the gloves at tained in each test. The test values are given as a six-figure code. The higher figure is the better result.

Abrasion resistance (0-4), Circular blade cut resistance (0-5), Tear resistance (0-4), Straight blade cut resistance (A-F) and impact resistance (P or no mark)

TEST / PERFORMANCE LEVEL	0	1	2	3	4	5
a. Abrasion resistance (cycles)	<100	100	500	2000	8000	-
b. Blade cut resistance (factor)	<1.2	1.2	2.5	5.0	10.0	20.0
c. Tear resistance (newton)	<10	10	25	50	75	-
d. Puncture resistance (newton)	<20	20	60	100	150	-
TEST / PERFORMANCE LEVEL	A	B	C	D	E	F
e. Straight blade cut resistance (newton)	2	5	10	15	22	30
f. Impact resistance (5J)	Pass = P / Fail or not performed = No mark					

Summary of the main changes vs EN 388:2003

- **Abrasion:** new abrasion paper will be used on the testing
- **Impact:** a new test method (fail: For pass for areas claiming impact protection)
- **Cut:** new EN ISO 13997, also known as TDM-100 test method. Cut test will be graded with letter A to F for cut resistant glove
- **A new marking** with 6 performance levels

Why a new cut test method?

The Coup Test runs into problems when testing materials such as high-performance fabrics based on materials glass fibre or stainless steel, all of which have a dulling effect on the blade. Consequently, the test can yield an inaccurate result, providing a cut level that is misleading as a truly indicative of the real cut resistance of the fabric. The TDM-100 test method is designed to better simulate real-world situations such as an accidental cut or slash. For materials that are shown to dull the blade during an initial test sequence in the Coup Test, the new EN388:2016, will state EN ISO 13997 score. From level A to level F.



ISO 13997 RISK SEGMENTATION

JDL expects that hand protection will fall into one of four categories according to the ISO test for cut performance:

A. Very low risk.

Multipurpose gloves.

B. Low to medium cut risk.

Most common applications in industries requiring medium cut resistance.

C. Medium to High cut risk.

Gloves suitable for specific applications requiring medium to high cut resistance.

D. High risk.

Gloves suitable for very specific applications requiring high cut resistance.

E & F. Specific applications and very high risk.

Very high risk and high exposure applications that demand ultra-high cut resistance.



EN 511:2006 PROTECTION AGAINST COLD

This standard measures how well the glove can withstand both convective cold and contact cold. In addition, water permeation is tested after 30 minutes. The performance levels are indicated with a number from 1 to 4 next to the pictogram, where 4 is the highest level.

PERFORMANCE LEVEL

- A. Protection against convective cold (0 to 4)
- B. Protection against contact cold (0 to 4)
- C. Water impermeability (0 or 1)
- “0”: level 1 was not reached
- “X”: test was not performed



EN 407:2020 PROTECTION AGAINST HEAT

This standard regulates the minimum requirements and specific test methods for safety gloves in relation to thermal risks. The performance levels are indicated with a number from 1 to 4 next to the pictogram, where 4 is the highest level.

PERFORMANCE LEVEL

- A. Resistance to flammability (in seconds) (0 to 4)
- B. Resistance to contact heat (0 to 4)
- C. Resistance to convective heat (0 to 4)
- D. Resistance to radiant heat (0 to 4)
- E. Resistance to small splashes of molten metal (0 to 4)
- F. Resistance to large splashes of molten metal (0 to 4)
- “0”: level 1 was not reached
- “X”: test was not performed



EN 374-1:2016 CHEMICAL PROTECTION

Chemicals can cause serious harm to both personal health and the environment. Two chemicals, each with known properties, can cause unexpected effects when they are mixed. This standard gives directives of how to test degradation and permeation for 18 chemicals but doesn't reflect the actual duration of protection in the workplace and the differences between mixtures and pure chemicals.

Penetration

Chemicals can penetrate through holes and other defects in the glove material. To be approved as a chemical protection glove, the glove shall not leak water or air when tested according to penetration, EN374-2:2014.

Degradation

The glove material might be negatively affected by chemical contact. Degradation shall be determined according to EN374-4:2013 for each chemical. The degradation result, in percentage (%), shall be reported in the user instruction.

Permeation

The chemicals break through the glove material at a molecular level. The breakthrough time is here evaluated and the glove must withstand a breakthrough time of at least:

CODE	Chemical	Cas No.	Class
A	Methanol	67-56-1	Primary alcohol
B	Acetone	67-64-1	Ketone
C	Acetonitrile	75-05-8	Nitrile compound
D	Dichloromethane	75-09-2	Chlorinated hydrocarbon
E	Carbon disulphide	75-15-0	Sulphur containing organic compound
F	Toluene	108-88-3	Aromatic hydrocarbon
G	Diethylamine	109-89-7	Amine
H	Tetrahydrofuran	109-99-9	Heterocyclic and ether compound
I	Ethyl acetate	141-78-6	Ester
J	n-Heptane	142-82-5	Saturated hydrocarbon
K	Sodium hydroxide 40%	1310-73-2	Inorganic base
L	Sulphuric acid 96%	7664-93-9	Inorganic mineral acid, oxidizing
M	Nitric acid 65%	7697-37-2	Inorganic mineral acid, oxidizing
N	Acetic acid 99%	64-19-7	Organic acid
O	Ammonium Hydroxide 25%	1336-21-6	Organic base
P	Hydrogen peroxide 30%	7722-84-1	Peroxide
S	Hydrofluoric acid 40%	7664-39-3	Inorganic mineral acid
T	Formaldehyde 37%	50-00-0	Aldehyde

- Type A – 30 minutes (level 2) against minimum 6 test chemicals
- Type B – 30 minutes (level 2) against minimum 3 test chemicals
- Type C – 10 minutes (level 1) against minimum 1 test chemical



EN 374-5:2016 CHEMICAL PROTECTION

EN 374-5:2016 : terminology and performance requirements for micro-organisms risks. This standard defines the requirement for protective gloves against microbiological agents. For bacteria and fungi, a penetration test is required following the method described in EN 374-2:2014: air-leak and water-leak tests. For protection against viruses, compliance to ISO 16604:2004 (method B) standard is necessary. This leads to new marking on the packaging for gloves protecting against bacteria and fungi, and for gloves protecting against bacteria, fungi and viruses.

OUR TECHNOLOGY- COATING

POLYURETHANE

IDEAL FOR PRECISION HANDLING AND LIGHT TO MEDIUM DUTY JOBS

Polyurethane (PU) is a tough, proven material that offers good tactile sensitivity by way of its thin material deposit. It conforms intimately over multiple glove liners to provide flexibility, dexterity and tactile sensitivity. PU coated gloves are amongst the most commonly used because they are versatile and provide excellent value. Newer, water-based PU coatings offer improved flexibility and less environmental lifecycle impact.

FLAT / TEXTURED

Flat/Textured PU takes on the surface properties of the glove liner which results in the thin, conformable deposit of coating material. The flat, textured nature of this coating is unique to Polyurethane (PU) coated gloves.

> Tactile grip in dry and in slightly oily condition

NITRILE

TOUGH COATING FOR HEAVY-DUTY JOBS

Nitrile is a synthetic rubber compound that offers excellent puncture, tear and abrasion resistance. Nitrile is also known for its resistance to hydrocarbon-based oils or solvents. Nitrile coated gloves are the first choice for industrial jobs which require handling of oily parts. Nitrile is durable and helps to maximize protection.

SANDY FINISH

Coating surface infused with thousands of tiny suction cup pockets. When pressed into contact with a wet or oily surface, they create a vacuum effect that disperses fluids away – significantly improving grip.

> Good grip in dry, wet, or oily conditions

FOAM

Foam coating cell structure is designed to channel fluids away from the surface of the object helping improve grip in oily conditions. Oily grip effectiveness varies with density of cells.

> Secure grip in dry conditions > Fair grip in slightly oil or wet conditions

FLAT / SMOOTH

Flat/Smooth coatings provide the wearer with a secure dry grip. Liquids will not absorb into the coating, keeping hands dry and clean.

> Secure, tacky grip for dry surfaces

LATEX

TOUGH JOBS — DRY OR OILY-WET

Latex is a natural rubber that is flexible, tough and durable, delivering a high degree of resistance to snagging, puncture and abrasion. Latex is water-resistant as well as resistant to protein-based oils. Latex is not recommended for jobs that involve contact with hydrocarbon-based oils or solvents.

CRINKLE

Crinkle coatings have creases or wrinkles on the surface of the coating that are designed to channel fluids away and allow better contact on dry or wet surfaces.

> Secure grip in dry or wet conditions

SANDY FINISH

Coating surface infused with thousands of tiny suction cup pockets. When pressed into contact with a wet or slippery surface, they create a vacuum effect that disperses fluids away – significantly improving grip.

> Good grip in dry and wet or oily-wet surfaces.

		1	2	Fair	Good	Secure	Fair	Good	secure	Fair	Good	Secure	None	Limited	Good	None/Slight	Fair	Good	Low	Medium	High	None	Minimal	High
COATING	GRIP	LAYERS		DRY GRIP			SLIGHTLY WET GRIP			OILY SURFACES GRIP			TOUCHSCREEN*				BREATHABILITY			DURABILITY			LIQUID RESISTANCE	
Nitrile	Sandy finish		●		●		●				●			●		●					●			●
	Sandy finish	●			●		●				●			●		●				●			●	
	Foam	●			●				●					●			●				●		●	
	Flat/Smooth	●				●								●		●				●			●	
Nitrile	MicroFoam	●			●			●			●				●			●			●		●	
Latex	Sandy finish		●			●		●			●		●			●					●			●
	Sandy finish	●				●		●			●		●			●					●		●	
	Crinkle	●				●		●		●			●			●					●		●	
Polyurethane	Flat / Textured	●			●			●			●				●	●			●				●	



Polyester PU Coating is 360°Breathable, for Ultra Cool, Drier and Less Sweat



Wearproof Waterbased PU Palm Coated



Certification EN388:2016 3121X



Preventing Slipping even when the Tablets is held by hands



STRONG DURABILITY
Machine Washable

 In Stock

 Best Selling



 In Stock



PU Coated Safety Work Gloves (PN8003)

Liner : 13 Gauges Polyester Liner

Coating : PU Palm Coating

Cuff : Knit Wrist Cuff

Color Available: Black, Grey, White, Green, Yellow etc

Size : 7"-11"(S,M,L,XL,XXL)

Package: 480 Pairs/CTN(63X54X35CM)

CE EN ISO 21420:2020 & EN 388:2016+A1:2018

Application : Construction, Road & Building Workers, Logistics, Mechanics, Factory Workshop, Garden etc



Breathable



Coating



Anti-Slip



Washable




CE Approved



Abrasion Resistance




Tear Strength Resistance

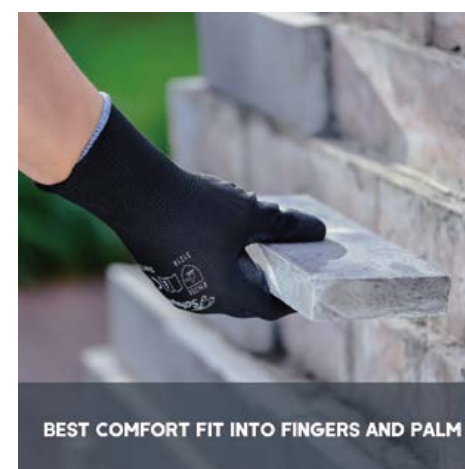

BEST COMFORT FIT INTO FINGERS AND PALM



BEST COMFORT FIT INTO FINGERS AND PALM

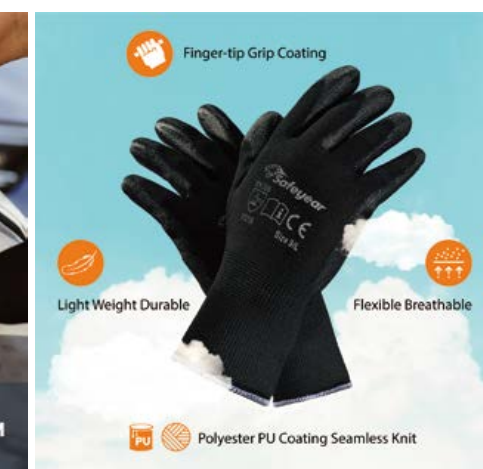

Light Weight Durable

Flexible Breathable

Polyester PU Coating Seamless Knit



NITRILE FOAM

BREATHABILITY & COMFORT & DURABILITY

PERFORMS WELL IN DRY AND
SLIGHTLY OILY CONDITIONS



Hot Best Selling

In Stock



Hot Best Selling

In Stock



Touch-Screen Nitrile Coated Safety Work Gloves (N1552)



Liner : 13 Gauges Polyester Liner
Coating : Nitrile Palm Coating
Cuff : Knit Wrist Cuff
Color Available: Black, Grey, White, Green, Yellow etc
Size : 7'-11'(S,M,L,XL,XXL)
Package: 288 Pairs/CTN(53X27X60CM)
CE EN ISO 21420:2020 & EN 388:2016+A1:2018
Application : Construction, Road & Building Workers, Logistics, Mechanics,
Factory Workshop, Garden & Other General Purpose Workplaces etc





Oil Resistant Nitrile Coated Safety Work Gloves (FD1289)

Liner : Jersey Liner
 Coating : Standard Nitrile Fully Coating
 Cuff : Knit Wrist Cuff
 Color Available: Black, Grey, White, Green, Yellow etc
 Size : 7"-11"(S,M,L,XL,XXL)
 Package: 120 Pairs/CTN (65X27X39CM)
 CE EN ISO 21420:2020 & EN 388:2016+A1:2018
 Application : Construction, Road & Building Workers, Logistics, Mechanics, Factory Workshop, Garden & Other General Purpose Workplaces etc



In Stock



Latex Coated Safety Work Gloves (LY3013)

Liner : 10 Gauges Polyester Liner
 Coating : Latex Crinkle Palm Coating
 Cuff : Knit Wrist Cuff
 Color Available: Black, Grey, White, Green, Yellow etc
 Size : 7"-11"(S,M,L,XL,XXL)
 Package: 120 Pairs/CTN (44X25X22CM)
 CE EN ISO 21420:2020 & EN 388:2016+A1:2018
 Application : Construction, Road & Building Workers, Logistics, Mechanics, Factory Workshop, Garden & Other General Purpose Workplaces etc





CUT PROTECTION

TRULY REALISE PERFECT COMBINATION OF COMFORT AND CUT PROTECTION



Hot Best Selling

In Stock



Anti-Cut & Touch-Screen Nitrile Coated Work Gloves (PD8045)

Liner : HDPE Cut Level 5 Liner
Coating : Nitrile Palm Coating
Cuff : Knit Wrist Cuff
Color Available: Black, Grey, White, Green, Yellow etc
Size : 7"-11"(S,M,L,XL,XXL)
Package: 216 Pairs/CTN(60X50X44CM)
CE EN ISO 21420:2020 & EN 388:2016+A1:2018
Application : Construction, Road & Building Workers, Logistics, Mechanics, Factory Workshop, Garden & Other General Purpose Workplaces etc



Cut Resistant Gloves

360 Breathable 13 Gauge HDPE Fabric Seamless Knit Technology

Durable Nitrile Foam Palm Coating Dipping Technology


Elastic Band knitted cuffs Knit Wrist Technology



Nitrile Foam Palm Coating
Non-slip & Durable Resistant
Provide good grip in oily and humid environments.



Anti-cutting Enhanced Design
Between Thumb And Index Finger
Provides better anti-cutting effect



Cut Resistance HDPE Fabric
Anti-cut & Breathable provides flexible grip and comfort for hands



Knitted Elastic Cuff
Prevent dirt and debris from entering gloves



Hot Best Selling

In Stock



Anti-Cut & Anti-Impact Nitrile Coated Work Gloves (TPR9004)

Liner : HDPE Cut Level 5 Liner

Coating : Nitrile Palm Coating

Cuff : Knit Wrist Cuff

Color Available: Black, Grey, White, Green, Yellow etc

Size : 7"-11"(S,M,L,XXL)

Package: 60 Pairs/CTN(44X28X34CM)

CE EN ISO 21420:2020 & EN 388:2016+A1:2018

Application : Construction, Road & Building Workers, Logistics, Mechanics, Factory Workshop, Garden & Other General Purpose Workplaces etc






Chemical & Oil Resistant Work Gloves (GSP0211 Red)

Liner : Interlock Liner
Fabric : PVC Fully Single Dipped
Color Available: Red, Blue, Black etc
Length Available: 27CM, 30CM, 35CM, 40CM, 45CM
Package: 120 Pairs/CTN (35X28X55CM)
EN ISO 21420:2020 & EN 388:2016+A1:2018
EN ISO 374-5:2016 & EN ISO 374-1:2016/A1:2018 (TYPE B JKL)
Application : Construction, Road & Building Workers, Logistics, Mechanics,
Factory Workshop, Garden & Other General Purpose Workplaces etc

SIZE : 10/XL





FL-0056 Green NITRILE

Fabric :Nitrile Unsupported

Liner : Flocked Lining

Length : 30-35cm

Package :

12 Pairs/Bag

120 Pairs/CTN (33cm)36×28×27cm



FL-0056 Black NITRILE

Fabric :Nitrile Unsupported

Liner : Flocked Lining

Length : 30-35cm

Package :

12 Pairs/Bag

120 Pairs/CTN (33cm)36×28×27cm



FL-1111B2 NITRILE

Fabric :Disposable Glove

Color : Blue

Size : S/M/L/XL

Package :

100 Pieces/Inner Box

1000 Pieces/CTN

39×25×26cm



FL-1111W1 LATEX

Fabric :Disposable Glove

Color : White / Blue

Size : S/M/L/XL

Package :

100 Pieces/Inner Box

1000 Pieces/CTN

39×25×26cm



Chemical & Oil Resistant Work Gloves (NSL1868)

Liner : Beathable Nylon

Fabric : Nitrile Foam

Color Available: Green, Yellow, Blue etc

Length Available: 30CM, 32CM, 35CM


Package: 120 Pairs/CTN (35X28X55CM)

EN ISO 21420:2020 & EN 388:2016+A1:2018

EN ISO 374-5:2016 & EN ISO 374-1:2016/A1:2018 (TYPE B JKL)

Application : Construction, Road & Building Workers, Logistics, Mechanics, Factory Workshop, Garden & Other General Purpose Workplaces etc

SIZE : 10/XL

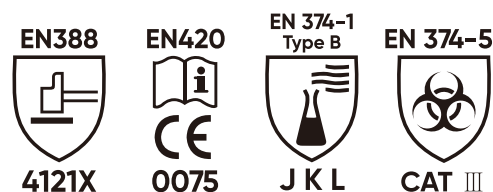



FL-1022 LEATHER

Palm : Cow Leather Full Palm
Color : Yellow
Size : 10.5"
Grade : AB/BC
Package :
12 Pairs/Bag
120 Pairs/CTN 30×26.5×64cm



FL-7219 COTTON

Fabric : Cotton/Polyester Blend String
Cuff : Knit Wrist
Color : Natural / Bleached
Size : 8"-11"
Weight : 500g-700g/Dozen
Package :
12 Pairs/Bag
300 Pairs/CTN 54×26×53cm



Hot Best Selling

FL-1015 Blue LEATHER

Palm : Split Cow Leather Full Palm
Fabric : Color Drill Fabric
Cuff : Rubberized Cuff
Color : Blue
Size : 10.5"
Grade : AB/BC
Package :
12 Pairs/Bag
120 Pairs/CTN 42×27×68cm



FL-5519A CANVAS / PVC DOTS

Fabric 8 OZ Cotton Canvas
Palm : Black PVC DOTS
Cuff : Knit Wrist
Color : Natural
Weight : 700g-800g/Dozen
Size : 9"-11"
Package :
12 Pairs/Bag
300 Pairs/CTN 54×26×53cm



FL-1015 Red LEATHER

Palm : Split Cow Leather Full Palm
Fabric : Color Drill Fabric
Cuff : Rubberized Cuff
Color : Red
Size : 10.5"
Grade : AB/BC
Package :
12 Pairs/Bag
120 Pairs/CTN 42×27×68cm



FL-7259 COTTON/PVC DOT

Fabric : Natural Cotton Blend String
Palm : Black PVC Dots
Cuff : Knit Wrist
Color : Natural
Size : 8"-11"
Weight : 600g-800g/Dozen
Package :
12 Pairs/Bag
300 Pairs/CTN 54×26×53cm




FL-1015 Yellow LEATHER

Palm : Split Cow Leather Full Palm
Fabric : Color Drill Fabric
Cuff : Rubberized Cuff
Color : Yellow
Size : 10.5"
Grade : AB/BC
Package :
12 Pairs/Bag
120 Pairs/CTN 42×27×68cm




FL-6011 COTTON / PVC DOTS

Fabric : 13 Gauges Nylon Liner
Palm : Blue PVC Dots
Cuff : Knit Wrist
Color : Blue
Weight : 600g-750g/Dozen
Size : 7"-11"
Package :
12 Pairs/Bag
300 Pairs/CTN 54×26×53cm





Hot Best Selling

In Stock




Class 0 Type 2 Chainsaw Work Gloves (7825)

Palm and Hand Back Joints: White cow leather
 Five fingers and palm strengthening: PVC
 Palm reinforced lining: EVA
 Hands back: fluorescent orange reflective cloth
 Left Hand Back: Special Cut Resistant Material
 Velcro cuffs
 Size : 7"-11"(S,M,L,XL,XXL)
 Package: 50 Pairs/CTN(62X30X37CM)
 CE EN ISO 11393-4:2019 & EN 388:2016+A1:2018 Chainsaw gloves
 Application : Chainsaw Logging, Garden Maintenance, Wood Fireplace,
 Carpentry, Construction & Other related wood works

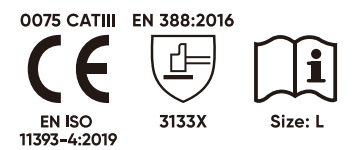

S-H24 WELDING

Style : Reinforced Gauntlet
Fabric : Split Cow Leather Full Palm
Size : 14" (35cm)
Grade : AB/BC



Black

Package :
12 Pairs/Bag 20 Pairs/CTN 42×35×36cm



Blue

Package :
12 Pairs/Bag 20 Pairs/CTN 42×35×36cm



Red

Package :
12 Pairs/Bag 60 Pairs/CTN 36×24×73cm



Grey

Package :
12 Pairs/Bag 60 Pairs/CTN 36×24×73cm





Heat Resistant Leather Welding Work Gloves
(FL-1023)

Style : Reinforced Gauntlet
Material : Split Cow Leater Full Palm
Liner : Heat Resistant Fabric
Color Available: Black, Yellow, Blue, Grey etc
Size : 16' Grade : AB Grade
Package: 24 Pairs/CTN(46X32X35CM)
CE EN 21420:2020 & CE EN 388:2016+A1:2018 & CE EN 12477:2001/A1:2005
Application : Welding, Metal Parts, Construction, Road & Building Workers,
Logistics, Mechanics, Factory Workshop etc



Heat Contact Resistant
500°C / 932°F



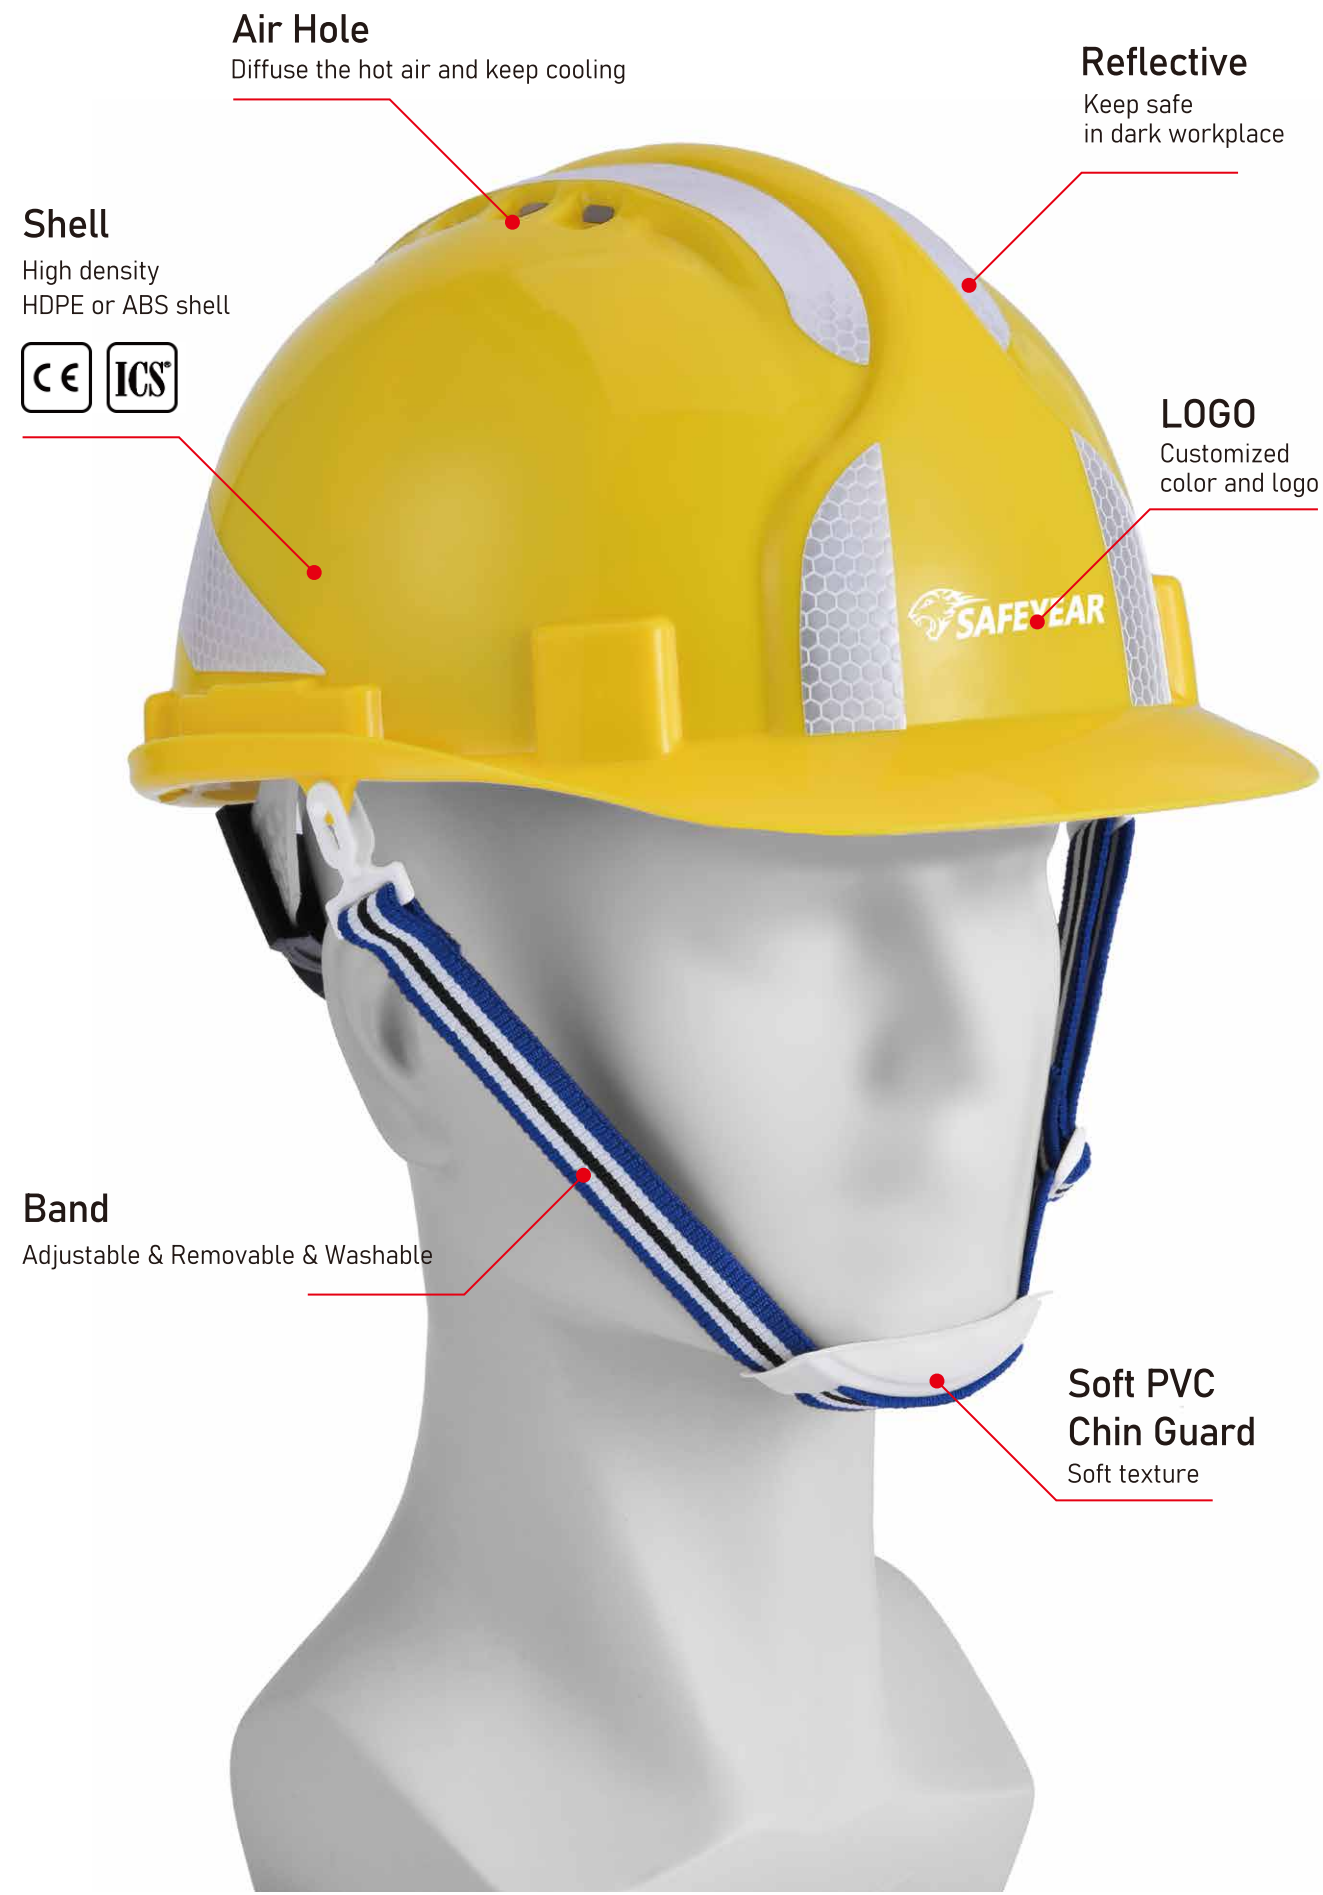

Head Protection

6-Points Attachment Provides Impact Protection





Orange



Blue



Red



White

Reflective & Breathable Safety Helmet (W-036)

Shell : High Density HDPE or ABS Material
 Head Hoop : Soft Fiber Tape with 6-Points Attachment
 Knob : Adjustable Rotary Knob
 Sweatband : Removable & Washable Fabric
 Chin Strip : Adjustable & Removable Nylon
 Reflective: New Design Reflective Tape for Dark Workplaces
 CE EN397+A1:2012
 ANSI/ISEA Z89.1-2014 Type I Class C



Impact
Protection



Shock
Absorption



Adjustable
Rotary Knob




Breathable
Design



Chemical
Resistant




Quality
Warranty

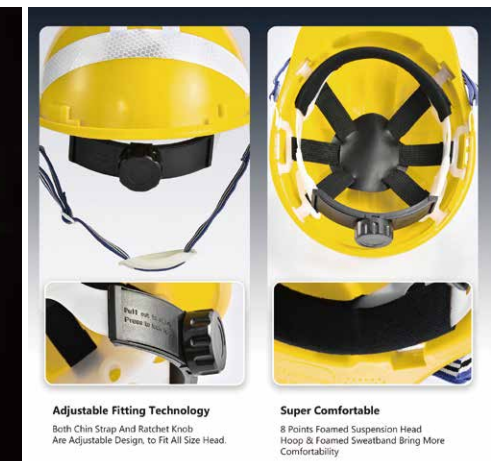




Heavy Duty Safety Helmet (W-018)

Shell : High Density HDPE or ABS Material
Head Hoop : Soft Fiber Tape with 6-Points Attachment
Knob : Adjustable Rotary Knob
Sweatband : Removable & Washable Fabric
Chin Strip : Adjustable & Removable Nylon
Reflective: New Design Reflective Tape for Dark Workplaces
CE EN397+A1:2012
ANSI/ISEA Z89.1-2014 Type I Class C





≥ 90%
Breathable



Available with LED Light



Blue



Yellow



White

Heavy Duty Breathable Safety Helmet (W-002)

Shell : High Density HDPE or ABS Material
Head Hoop : Soft Fiber Tape with 4-Points Attachment
Knob : Adjustable Rotary Knob
Sweatband : Removable & Washable Fabric
Chin Strip : Adjustable & Removable Nylon
CE EN397+A1:2012
ANSI/ISEA Z89.1-2014 Type I Class C



Impact
Protection



Shock
Absorption



Adjustable
Rotary Knob



Breathable
Design



Chemical
Resistant



Quality
Warranty



Orange



Red



Yellow



White

Heavy Duty Safety Helmet (W-003)

Shell : High Density HDPE or ABS Material
Head Hoop : Soft Fiber Tape with 4-Points Attachment
Knob : Adjustable Rotary Knob
Sweatband : Removable & Washable Fabric
Chin Strip : Adjustable & Removable Nylon
CE EN397+A1:2012
ANSI/ISEA Z89.1-2014 Type I Class C



≥ 10kN
Anti-Impact



Impact
Protection



Shock
Absorption



Adjustable
Rotary Knob



Breathable
Design



Chemical
Resistant



Quality
Warranty





EN ISO16321-1&EN166
Approved Adjustable Sliding Scratch-proof
Anti-Fog and Anti Impact Safety Goggles

EN352 Approved Adjustable
Earmuff to Protect From
Working Noise SNR 25dB

**Adjustable
Breathable
Vents**

Ensure Air Circulation and
Reduce Head Temperature

Open

Close

360°



In Stock


Black

Orange

Safety Helmet with Face Shield & Hearing Protection (M-5018)



Shell : ABS Material
Face Shield : Adjustable Clear PC Face Visor
Earmuff : SNR25dB Anti-Noise Safety Earmuff
Chin Strip : Adjustable & Removable Nylon
Reflective: Hi-Vi Reflective Tape for Dark Workplaces
CE EN397:2012+A1:2012
CE EN ISO 16321-1:2022, EN 166:2001
CE EN352-3:2020



-  Impact Protection
-  Shock Absorption
-  Adjustable Rotary Knob
-  Breathable Design
-  Chemical Resistant
-  Quality Warranty



6-Point Suspension System
ABS Quality Material


 Breathable & Soft Sweatband

 Y-Type Chinstrap
Chin Double Belt Buckle

 Ratchet Knob Adjustment

Reflective Safety

7 Hi-Viz Reflective Design Tapes Keep
You Visible In Dark Working Sites

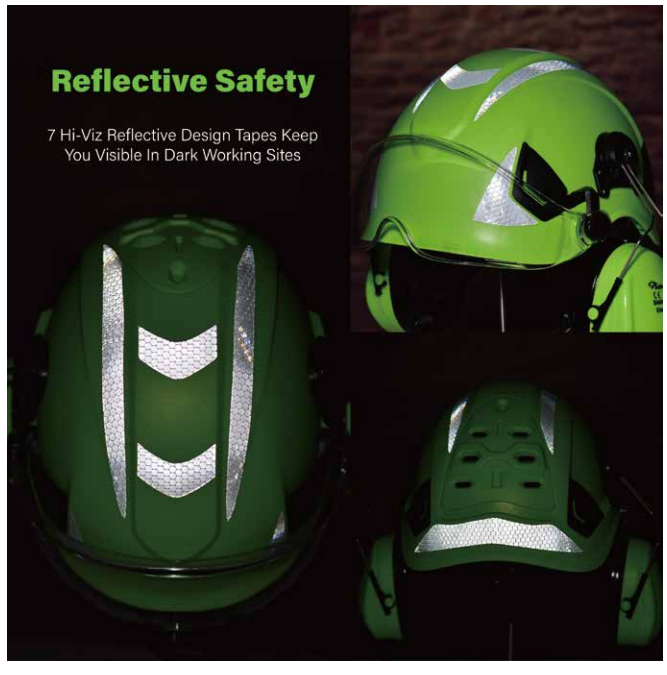




Adjustable Face Visor
EN16321-3&EN1731 Approved Quality Steel Mesh Face Visor to Protect from Sparkles



Adjustable Ear Muff
EN 352 Approved Quality Ear Muff to Protect from Working Noise SNR 23DB



Adjustable Fitting Technology
Both Chin Strap And Ratchet Knob Are Adjustable Design, to Fit All Size Head.

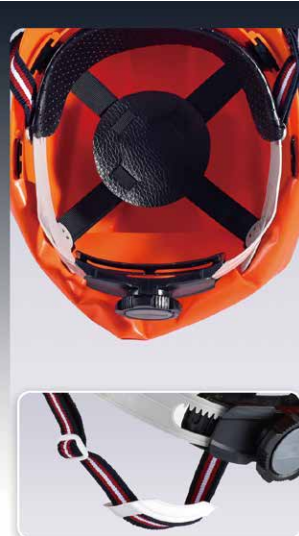

Super Comfortable
8 Points Foamed Suspension Head Hoop & Foamed Sweatband Bring More Comfortability



In Stock



Safety Helmet with Face Shield & Hearing Protection (M-5009)

Shell : High Density HDPE or ABS Material
Face Shield : Adjustable Steel Mesh Face Visor
Earmuff : SNR23dB Anti-Noise Safety Earmuff
Neck Cover : Sand-proof Soft PVC Cover
Chin Strip : Adjustable & Removable Nylon
Reflective: Hi-Vi Reflective Tape for Dark Workplaces
CE EN397:2012+A1:2012
CE EN ISO 16321-3:2022
CE EN 1731:2006



Impact Protection



Shock Absorption



Adjustable Rotary Knob



Breathable Design





Chemical Resistant



Electric Hazard



Quality Warranty

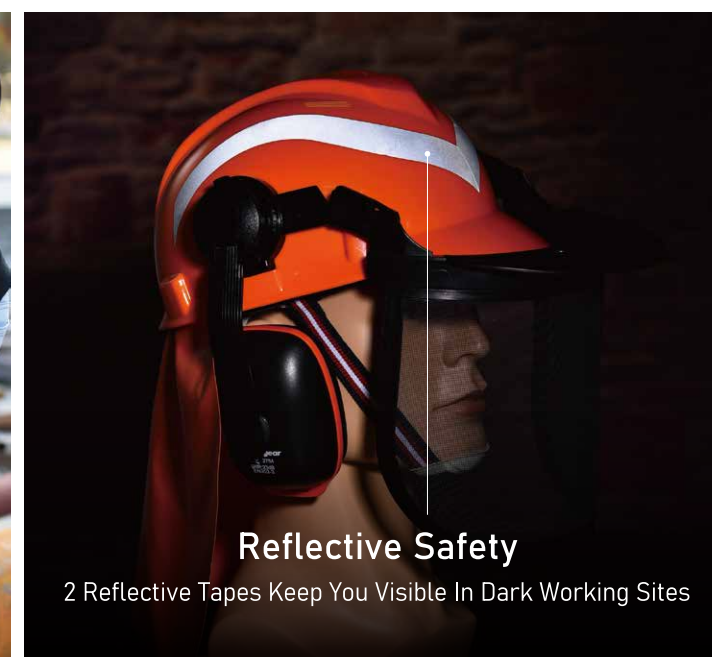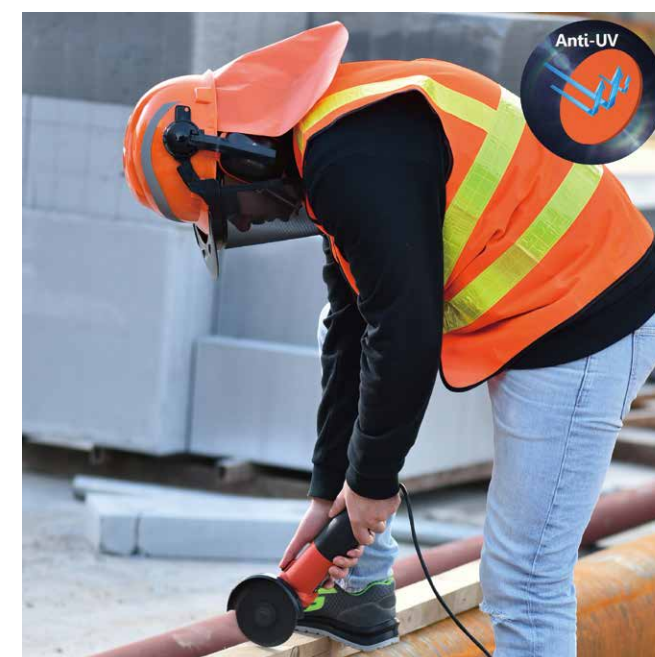


Reflective Safety

2 Reflective Tapes Keep You Visible In Dark Working Sites



Baseball Design Safety Cap WH-001 (DefendStrike)

Inner Shell : Removable & Comfortable ABS+EVA
Shape : The Ergonomatically Shaped Hard Shell
Head Hoop : Fastening And Soft Foam Insert Cushions
Band : Velcro Closure
Color Available : Black, Blue, Orange, Red etc
CE EN812:2012



Black



Red



Blue




Orange



Heavy Duty Face Shield with Headgear M-5002 (SafeFace)

Shell : High Density PP Headgear
Face Shield : Available for PC, PVC, Steel Mesh
Knob : Adjustable Rotary Knob
Sweatband : Removable & Washable Fabric
Chin Strip : Adjustable & Removable Nylon (Optional)
CE EN ISO 16321-1, EN 166:2001
ANSI/ISEA Z87.1-2020
AS/NZS1337.1-2010



Anti-fog:
Anti-fog coating

Temple Tip:
Soft TPR temple tip
make ear more relax

Scratch resistant :
Anti-scratch Properties

Nose Tip:
Soft TPR nose tip

UV Protection :
90%-99% UV Protection

Lens Style:
Extra Wide Shields
for Dust Proof

Temple:
Dark grey PC temple

Fitting for Europe Face

Round

Slim

Square

Oval

12cm/4.7in

14.5cm/5.7in

5cm /2in

2.8cm/1.1in

8cm/3.15in

Left

Back

Right

The Facts and Function:

- SAFEYEAR™ Washing Anti-Fog Coating lasts longer than traditional Anti-Fog coatings,helping to increase eyewear performance in wet and steamy environments.
- Workers may enjoy reliable, clearer sight longer, because the coating, with its active ingredient, is bonded to the lens.
- Polycarbonate lenses absorb 99.9% of UV rays.
- The coating retains its effectiveness for at least 25 washings with water, allowing workers to wear their eyewear longer.
- The coating can be disinfected with diluted bleach soaking or alcohol wipes without losing its Anti-Fog performance. Washing with soap and water is considered a best practice and can enhance coating durability.
- Workers can feel confident wearing SAFEYEAR™ Anti-Fog coated eyewear


because it meets the requirements of ANSI Z87.1 and EN166. May be used for chemical splash.

7.) Ratings: Z87+ Dust – D4



Regulatory/Standards (Markings)

• ANSI Z87.1-2020(U6 D3 D4) – Indirectly Vented Version
Representative Transmittance Spectrum (200 – 2000 nm)

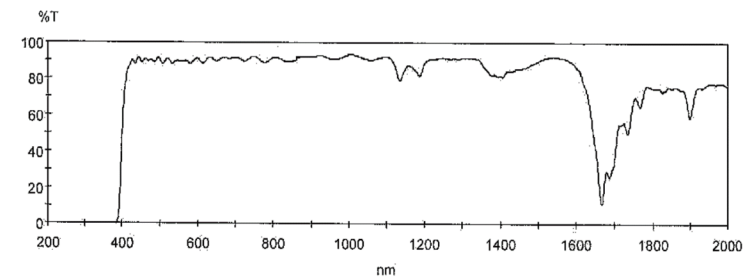

ANSI Z87.1 Transmittance Requirement Classification	
Visible Light Filter (380 – 780 nm)	Clear
Ultraviolet Filter (200 – 380 nm)	U6
Infrared Filter (780 – 2000 nm)	Not rated
Welding Filter	Not rated



Super Clear & Anti-Fog Safety Glasses (SG003)

Frame: Heavy Duty Polycarbonate (PC)
 Lens: Super Clear PC Lens
 Nose Tip: Soft & Comfortable TPR Nose Tip
 CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
 ANSI/ISEA Z87.1 Approved by USA ICS lab
 GB14866:2006 Approved by Shanghai Security & Labor Protection Lab



UV Protection



Anti-Fog



Anti-Impact



Light



High Visual



Dust Resistant



Anti-Splash




Shock Absorption




Quality Warranty



Anti Fog Clear Lens
 Fog resistant coating technology to prevent water steam up during work

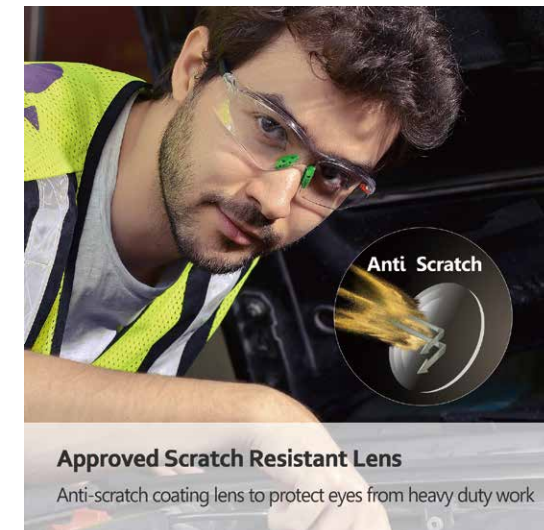

Approved Scratch Resistant Lens
 Anti-scratch coating lens to protect eyes from heavy duty work

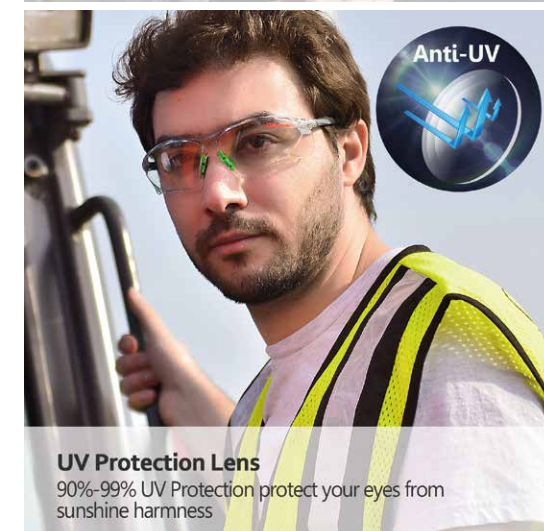

UV Protection Lens
 90%-99% UV Protection protect your eyes from sunshine harmness





Design For Europe Face
 Soft Fitting TPR Nose Tip & Leg Tip make you feel without wearing any glasses




Super Clear & Anti-Fog Safety Glasses (SG001)

Frame: Heavy Duty Polycarbonate (PC)
Lens: Super Clear PC Lens
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS Lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab

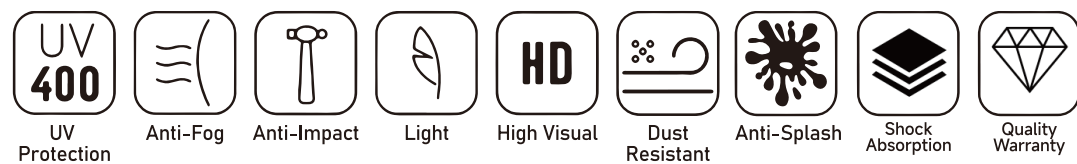

Super Clear & Anti-Fog Safety Glasses (SG035)

Frame: Heavy Duty Polycarbonate (PC)
Lens: Super Clear PC Lens
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS Lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab

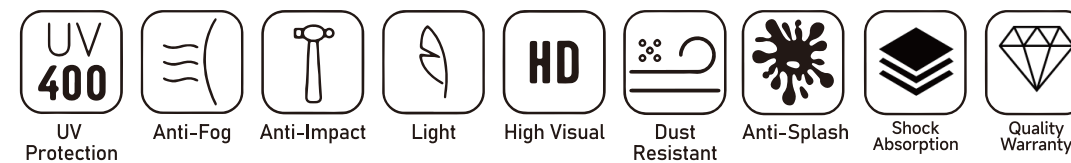


 In Stock



Super Clear & Anti-Fog Safety Glasses (KS102)

Frame: Heavy Duty Polycarbonate (PC)
Lens: Super Clear PC Lens
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab

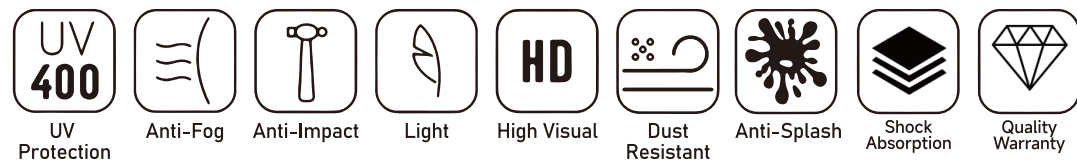

Front



Left



Back


 In Stock



Super Clear & Anti-Fog Safety Glasses (SG009)



Frame: Heavy Duty Polycarbonate (PC)
Lens: Super Clear PC Lens
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab

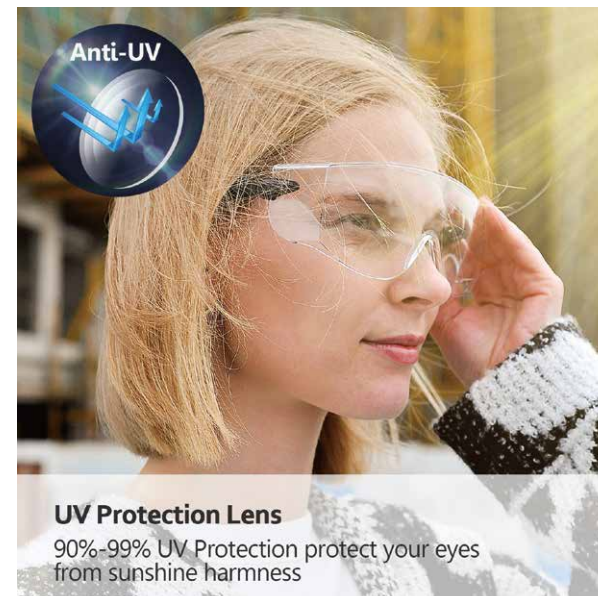

UV Protection Lens

90%-99% UV Protection protect your eyes from sunshine harmness



Crystal clear HD vision

Super Lightweight Work Glasses & Easy Wear for Working




In Stock



Anti-Fog & Super Comfort Safety Glasses SG002 (DualShield Pro)

Frame: Heavy Duty Polycarbonate (PC)
Inner Frame: Shock Absorption Inner Foam
Lens: Super Clear PC Lens(Anti-Fog Coating)
Nose Tip: Soft & Comfortable TPR Nose Tip
Legs: Lightweight PC Legs (Pressure Diffusion)
Leg Tips: Slip Resistant & Comfortable TPR Tips
Band: Elastic Band, Exchange Freely
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab

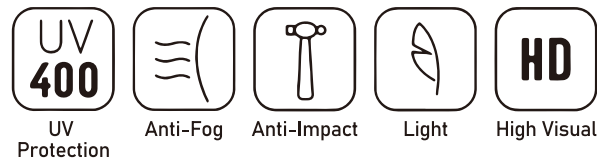


Elastic Band Replaced Freely
Dual use of plastic legs & elastic band, suitable for different workplace



UV Protection Lens
90%-99% UV Protection protect your eyes from sun shine harmness







In Stock



Anti-Fog & Super Comfort Safety Glasses SG002 Black (DualShield Pro)

Frame: Heavy Duty Polycarbonate (PC)
Inner Frame: Shock Absorption Inner Foam
Lens: Dark PC Lens (Anti-Fog Coating)
Nose Tip: Soft & Comfortable TPR Nose Tip
Legs: Lightweight PC Legs (Pressure Diffusion)
Leg Tips: Slip Resistant & Comfortable TPR Tips
Band: Elastic Band, Exchange Freely
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab

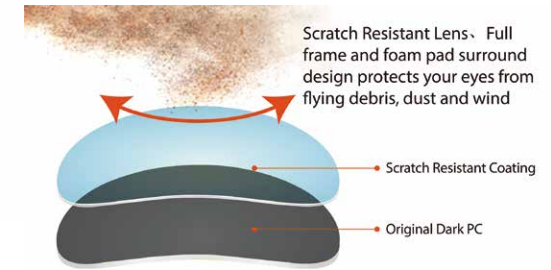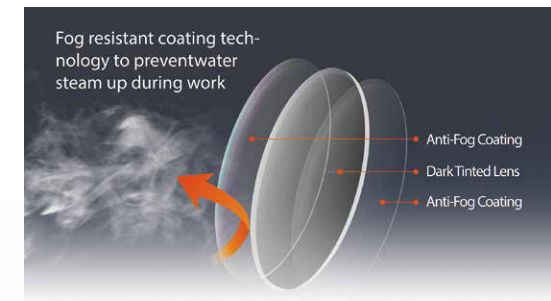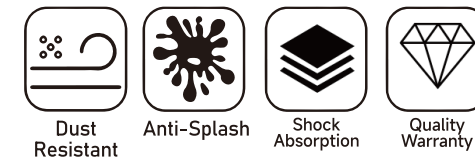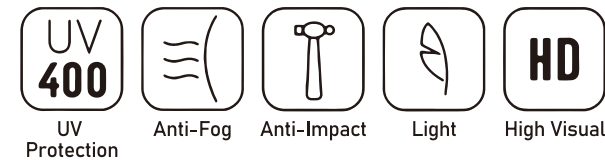

EN16321-1

Can provide reliable impact protection in any environment



Detachable eyeglass legs

UV Protection,Dark Tinted
Lenses That Will Reduce Glare
And Improve Your Viewing Clarity.



 In Stock



 In Stock



Super Clear & Anti-Fog Safety Glasses (SG037)

Frame: Heavy Duty Polycarbonate (PC)
Inner Frame: Shock Absorption Inner Foam
Lens: Super Clear PC Lens(Anti-Fog Coating)
Nose Tip: Soft & Comfortable TPR Nose Tip
Legs: Lightweight PC Legs (Pressure Diffusion)
Leg Tips: Slip Resistant & Comfortable TPR Tips
Band: Elastic Band, Exchange Freely
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab



Approved Scratch Resistant Lens

Anti-scrath coating lens to protect eyes from heavy duty work



Anti Fog Clear Lens

Fog resistant coating technology to preventwater steam up during work

 In Stock




Left



Right

Anti-Fog & Super Comfort Safety Glasses (SG037 Black)

Frame: Heavy Duty Polycarbonate (PC)
Inner Frame: Shock Absorption Inner Foam
Lens: Dark PC Lens (Anti-Fog Coating)
Nose Tip: Soft & Comfortable TPR Nose Tip
Legs: Lightweight PC Legs (Pressure Diffusion)
Leg Tips: Slip Resistant & Comfortable TPR Tips
Band: Elastic Band, Exchange Freely
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab



UV Protection Lens

90%-99% UV Protection protect your eyes from sunshine harmness



Approved Scratch Resistant Lens

Anti-scrath coating lens to protect eyes from heavy duty work




In Stock




Anti-Fog & Breathable Safety Goggles SG032 (SkyDome Ultra)

Frame: Soft & Comfortable Polycarbonate (PC)
Lens: Super Clear PVC Lens(Anti-Fog Coating)
Band: Elastic & Adjustable Band
Breathable: 4 Adjustable Breathing Valves
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab

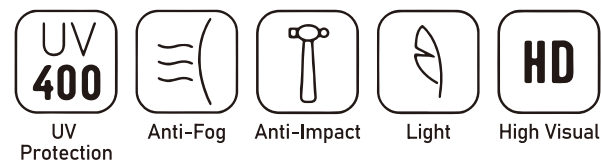


Over Glasses Design

360° Sealed Design for Spectacle Wearer,
More Safe and Comfortable

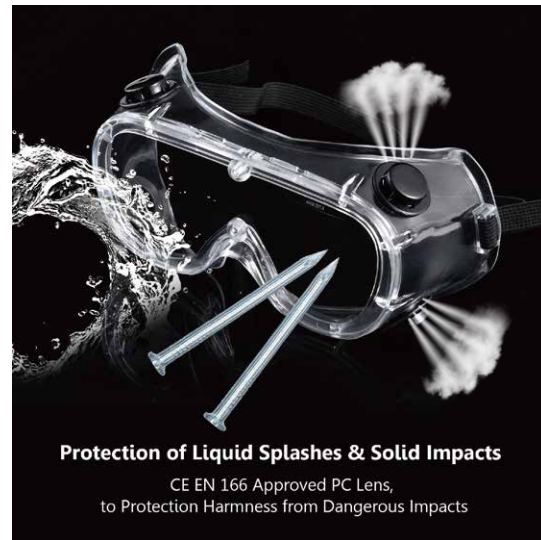

Protection of Liquid Splashes & Solid Impacts
CE EN 166 Approved PC Lens,
to Protection Harmness from Dangerous Impacts





In Stock



Anti-Fog & Over-Glassed Safety Goggles SG007 (StormGuard Elite)


Frame: Soft & Comfortable Polycarbonate (PC)
Lens: Super Clear PVC Lens(Anti-Fog Coating)
Band: Elastic & Adjustable Band
Nose Tip: Soft & Comfortable Nose Tip
CE EN 166:2001 Approved by Europe CCQS Lab (NB:2834)
ANSI/ISEA Z87.1 Approved by USA ICS lab
GB14866:2006 Approved by Shanghai Security & Labor Protection Lab

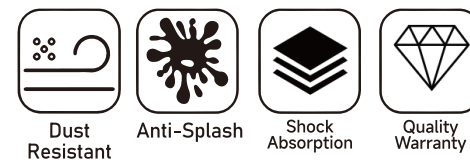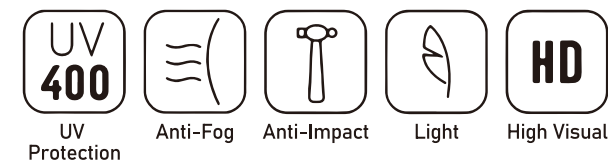

Anti-fog Clear Lens
Fog resistant coating technology to prevent water
steam up during work



Approved Scratch Resistant Lens
Anti-sctach coating lens to protect eyes from heavy duty work

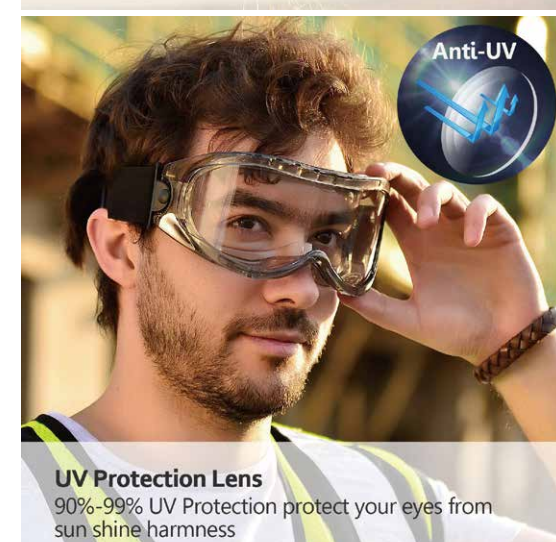

UV Protection Lens
90%-99% UV Protection protect your eyes from
sun shine harmness



Over Glasses Design
Side open design goggles allow workers to use over
their own glasses



Hot Best Selling
In Stock



CE ANSI AS/NZS certified products
SNR 33dB NRR 26dB

33dB Industrial Noise Cancelling Safety Earmuffs EM-5002 (Noise Defender Pro)

Shell : High Density ABS Material
Head Band : Heavy Duty ABS Material
Band Foam: Shock Absorption HD Foam
Sponge: Sound Absorbing Foamed Sponge
Design : Easy Slide Cup Adjustment
Sound Proof: SNR 33dB, NRR 26dB
CE EN352-1:2020 & CE EN352-3:2020
ANSI S3.19-1974
Weight: 290±10 Grams & Box Size: 32*23*12CM

- Noise Reduction
- Reduce Ear Pressure
- Adjustable
- Comfortable to Wear
- 360° Rotary
- Quality Warranty



Hot Best Selling
In Stock




CE ANSI AS/NZS certified products
SNR 31dB NRR 26dB

31dB Industrial Noise Cancelling Safety Earmuffs FM-1B (Quite Armor)

Shell : High Density ABS Material
Head Band : Heavy Duty ABS Material
Band Foam: Shock Absorption HD Foam
Sponge: Sound Absorbing Foamed Sponge
Design : Easy Slide Cup Adjustment
Sound Proof: SNR 31dB, NRR 26dB
CE EN352-1:2020 & CE EN352-3:2020
ANSI S3.19-1974
Weight: 220±10 Grams & Box Size: 32*23*12CM

- Noise Reduction
- Reduce Ear Pressure
- Adjustable
- Comfortable to Wear
- 360° Rotary
- Quality Warranty

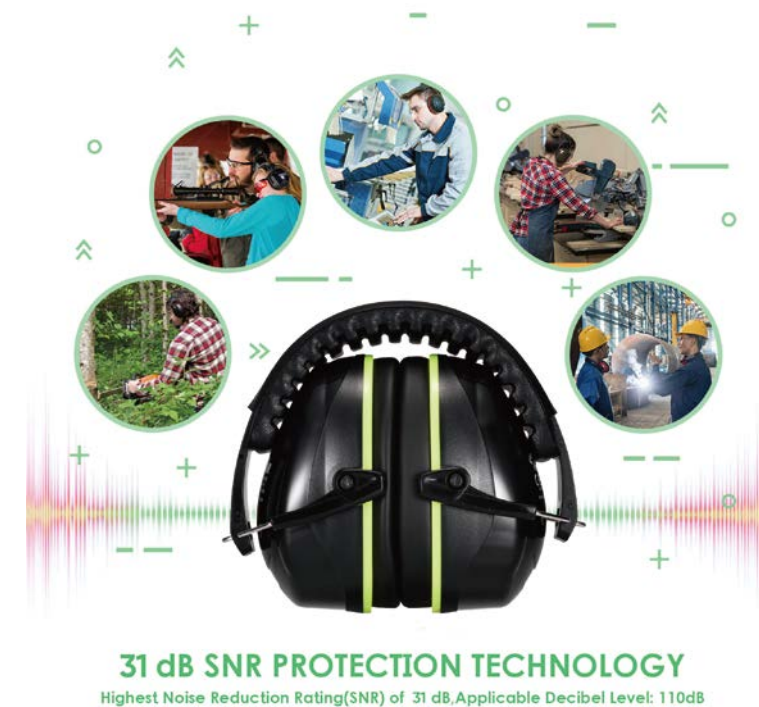

31 dB SNR PROTECTION TECHNOLOGY
Highest Noise Reduction Rating(SNR) of 31 dB, Applicable Decibel Level: 110dB



29dB Industrial Noise Cancelling Safety Earmuffs EM-5003 (Noise Garder X)

Shell : High Density ABS Material
Head Band : Heavy Duty ABS Material (Breathable)
Sponge: Sound Absorbing Foamed Sponge
Design : Easy Slide Cup Adjustment
Sound Proof: SNR 29dB, NRR 23dB
CE EN352-1:2020 & CE EN352-3:2020
ANSI S3.19-1974
Weight: 230±10 Grams & Box Size: 32*23*12CM



CE **ANSI** AS/NZS
certified products
SNR 29dB NRR 23dB



Noise Reduction



Reduce Ear Pressure



Adjustable



Comfortable to Wear



360° Rotary



Quality Warranty



Safeyear



30dB Safety Earmuffs for Helmet E-2008D (Sonic Fortress)

Shell : High Density ABS Material
Head Band : Heavy Duty ABS Material (Breathable)
Sponge: Sound Absorbing Foamed Sponge
Design : Fitting for Safety Helmet
Sound Proof: SNR 30dB, NRR 28dB
CE EN352-3:2020
ANSI S3.19-1974
Weight: 260±10 Grams, 20PCS/CTN, CTN Size: 52*35*31C



CE **ANSI** AS/NZS
certified products
SNR 30dB NRR 28dB



Noise Reduction



Reduce Ear Pressure



Adjustable



Comfortable to Wear



360° Rotary



Quality Warranty



Hearing Protection

All earplugs we produced are with premium quality, raw material original from Germany. They are tested by the authoritative Laboratory of NVLAP certification in US.

User Instruction for PU foam earplugs

The best rebound time in the ear canal is around 30-40 seconds under human body temperature, neither too fast nor too slow as it allows the plug fully insert the ear canal. However, Rebound time will vary with the ambient temperature goes too hot or too cold when fitting the earplug.

1

Roll to a small crease-free cylinder

2

Insert as shown

3

Hold until expansion

4

Ensure suitable fitting

Earplug Dispenser

With the Ear Plug Dispenser Plug station, you can afford to put earplugs in all the places they're needed. Available in 250 and 500 pairs per dispenser, Plug Stations increase compliance thanks to their high visibility construction.

ED-250

with 250 pairs earplugs

ED-250S

with mounting bracket

FITS: EC-1001A / EC-1003A / EC-1005A / EC-1006A / EC-1007A / EC-1008A

- * Sold as 250/box
- * Earplugs dispenser eliminates the need for individual paper/polybag packaging, good for environment.
- * Convenient, dispenser delivers one uncorded foam ear plug with a gentle turn. Earplug drop right into the palm of your hands or tray, no need to worry about the earplugs falling on the floor
- * Free-standing or wall-mounted
- * Made from ABS plastic, PVC Free & durable



ED-500

with 500 pairs earplugs

ED-500S

with mounting bracket

FITS: EC-1001A / EC-1003A / EC-1005A / EC-1006A / EC-1007A / EC-1008A

- * Sold as 500/box
- * Earplugs dispenser eliminates the need for individual paper/polybag packaging, good for environment.
- * Convenient, dispenser delivers one uncorded foam ear plug with a gentle turn. Earplug drop right into the palm of your hands or tray, no need to worry about the earplugs falling on the floor
- * Free-standing or wall-mounted
- * Made from ABS plastic, PVC Free & durable



Hot Best Selling

In Stock



CE ANSI AS/NZS certified products

SNR 38dB NRR 32dB

32dB Industrial Noise Cancelling Safety Earplugs EC-100A-C

Material : Polyurethane Foam
 Shape : Bullet Shape
 String : Available for Plastic string
 Color Available: Orange, Yellow, Red, Blue etc
 Sound Proof: SNR 38dB, NRR 32dB
 CE EN352-2:2020. & ANSI S3.19-1974
 Weight: 400±10 Grams & Box Size: 28*11*16.5CM

Noise Reduction

Reduce Ear Pressure

Comfortable to Wear

Quality Warranty

Hot Best Selling

In Stock



200 Pair Of Large Capacity
 Obvious Noise Reduction Effect
 Perfect Fit To The Ear Canal

CE ANSI

SNR 38dB | NRR 32dB



PREMIUM QUALITY FOAM EARPLUGS



100 Pair Of Large Capacity
 Obvious Noise Reduction Effect
 Perfect Fit To The Ear Canal
 Not Easy To Fall Off During Work

CE ANSI

SNR 38dB | NRR 32dB



PREMIUM QUALITY FOAM EARPLUGS



EC-1005A EC-1005A-C



Features and Benefits: Comfortable

Soft PU foam material for low pressure inside the ear
Slow rebound allows fully attach to ear canal

Convenient

Dispenser available (ED-250, ED-500)
Nylon cord or PVC cord helps prevent earplugs loss

Compatible with

Designed to be compatible with earmuff or other PPE

EN 352-2:2020
SNR 35dB

ANSI S3.19-1974
Noise Reduction Rate **NRR 32dB**
AS/NZS 1270:2002
SLC(80) = 22dB CLASS 4


Frequency [Hz]	125	250	500	1000	2000	4000	8000
Sound attenuation Mf [dB]	31.7	31.5	35.5	37.3	36.7	43.2	45.0
Standard deviation Sf [dB]	3.6	4.4	4.2	4.1	4.1	4.0	3.0
APV Mf-Sf [dB]	28.1	27.1	31.2	33.2	32.6	39.2	42.0
SNR=35dB SNR _m =38.2dB SNR _s =2.9dB	H=35dB H _m =38.3dB H _s =3.4dB	M=33dB M _m =36.2dB M _s =3.2dB	L=30dB L _m =33.7dB L _s =3.4dB				

EC-1005AS EC-1005AS-C



EN 352-2:2020
SNR 34dB

ANSI S3.19-1974
Noise Reduction Rate
NRR 28dB



EC-1006A EC-1006A-C



Features and Benefits: Comfortable

Soft PU foam material for low pressure inside the ear
Slow rebound allows fully attach to ear canal

Convenient

Dispenser available (ED-250, ED-500)
Nylon cord or PVC cord helps prevent earplugs loss

Compatible with

Designed to be compatible with earmuff or other PPE

EN 352-2:2020
SNR 35dB

ANSI S3.19-1974
Noise Reduction Rate **NRR 31dB**
AS/NZS 1270:2002
SLC(80) = 18dB CLASS 3

Frequency [Hz]	125	250	500	1000	2000	4000	8000
Sound attenuation Mf [dB]	33.8	31.8	36.0	37.2	36.1	41.5	45.2
Standard deviation Sf [dB]	4.8	4.5	3.9	3.6	3.7	4.0	3.1
APV Mf-Sf [dB]	29.0	27.3	32.2	33.6	32.3	37.5	42.1
SNR=35dB SNR _m =38.1dB SNR _s =2.8dB	H=35dB H _m =37.7dB H _s =3.2dB	M=33dB M _m =36.3dB M _s =3.1dB	L=31dB L _m =34.2dB L _s =3.6dB				

EC-1006A(GW)

EC-1001A(OPW)



EC-2001 EC-2001C

EC-2001C-D (Metal Detectable)



Comfortable

Pure silicone material for low pressure inside the ear
Reusable use for long time in good shape
Humidity and sweat resistant, helps preventing from moisture ramp up in the ear canal
3 layers design allows fully attach to ear canal
Design to fit majority ear canal with premium comfort and protection

Convenient

Christmas tree design fits most ear canals making the plugs easier to use Nylon cord or PVC cord, helps preventing from earplug loss


Compatible with

Designed to be compatible with earmuff or other PPE

EN 352-2:2020
SNR 32dB

ANSI S3.19-1974
Noise Reduction Rate **NRR 26dB**
AS/NZS 1270:2002
SLC(80) = 24dB CLASS 4

Frequency [Hz]	125	250	500	1000	2000	4000	8000
Sound attenuation Mf [dB]	34.5	30.4	36.0	31.9	36.1	41.2	43.0
Standard deviation Sf [dB]	5.8	4.4	4.7	4.6	4.8	5.6	4.1
APV Mf-Sf [dB]	28.8	26.0	31.3	27.3	31.2	35.6	38.9
SNR=32dB SNR _m =36.3dB SNR _s =4.2dB	H=32dB H _m =36.5dB H _s =4.2dB	M=29dB M _m =33.6dB M _s =4.4dB	L=28dB L _m =32.6dB L _s =4.2dB				



EC-2001S EC-2001S-C




Comfortable

Pure silicone material for low pressure inside the ear
Reusable use for long time in good shape
Humidity and sweat resistant, helps preventing from moisture ramp up in the ear canal
3 layers design allows fully attach to ear canal
Design to fit most ear canal with premium comfort and protection

EN 352-2:2020
SNR 28dB

ANSI S3.19-1974
Noise Reduction Rate
NRR 20dB

Frequency [Hz]	125	250	500	1000	2000	4000	8000
Sound attenuation Mf [dB]	30.9	28.8	31.4	33.2	33.6	29.6	35.2
Standard deviation Sf [dB]	4.9	5.0	6.2	6.1	4.3	4.6	5.6
APV Mf-Sf [dB]	26.0	23.7	25.2	27.1	29.3	25.0	29.6
SNR=28dB SNR _m =32.0dB SNR _s =3.8dB	H=28dB H _m =31.2dB H _s =3.6dB	M=27dB M _m =31.5dB M _s =4.5dB	L=26dB L _m =30.4dB L _s =4.7dB				





REUSABLE SILICONE EARPLUG



Application:

Suitable for sleeping, travelling, swimming, surfing, showering, studying, working and sporting events.

Reach around your head and pull up and back on your outer ear. This straightens out the ear canal, making way for a snug fit.

Hold the stem end of the ear plug and insert it well inside your ear canal.

Make sure you feel it sealing and the fit is comfortable.

To remove, twist earplugs gently to break the seal and remove them slowly.

They should be cleaned often in mild soapy water.

If they become hard, torn or deformed, they should be replaced.



While holding the stem, reach a hand over your head and gently pull top of your ear up and back.



Insert the earplug so all flanges are well inside your ear canal.



If properly fitted, the tip of the earplug stem may be visible to someone looking at you from the front.

EC-2016



Adult
20x20MM



INSTRUCTIONS FOR USE

Please read the following instructions for use and keep this leaflet for future reference.

WARNING

- Choking hazard. Due to small parts, keep away from children. If used by children, adult supervision is required.
- Should not be used for scuba diving or other deep diving.
- For personal use only; not intended for professional or industrial use.
- Consult your doctor before use if you have a perforated or infected ear drum.
- Before use, make sure your hands and ear plugs are clean and free of dirt or debris.
- Do not alter or modify the ear plugs in any way and check for any damage before use.
- If any irritation occurs, stop using immediately.
- If used for flying, the ear plugs should be removed as descending commences.
- When not in use, store the ear plugs in the travel case supplied.



EN 352-2:2020
SNR 28dB

ANSI S3.19-1974
Noise Reduction Rate
NRR 20dB

Frequency [Hz]	125	250	500	1000	2000	4000	8000
Sound attenuation Mf [dB]	26.3	22.9	24.0	28.5	37.8	41.5	39.3
Standard deviation Sf [dB]	4.0	3.4	4.2	4.2	4.5	3.3	4.1
APV Mf-Sf [dB]	22.3	19.5	19.8	24.4	33.3	38.2	35.2
SNR= 28dB SNRm=31.0dB SNRc=3.4dB	H=32dB Hm=35.0dB Hc=3.3dB	M=24dB Mm=27.7dB Mc=3.6dB	L= 22dB Lm=25.0dB Lc=3.3dB				


EC-2061 / EC-2061C
EC-2061C-D (Metal Detectable)



EN 352-2:2020
SNR 27dB
H= 29dB M= 24dB L= 23dB

ANSI S3.19-1974
Noise Reduction Rate **NRR 22dB**
AS/ NZS 1270: 2002
SLC(80) = 14.2dB CLASS 2

EC-2062 / EC-2062C
EC-2062C-D (Metal Detectable)

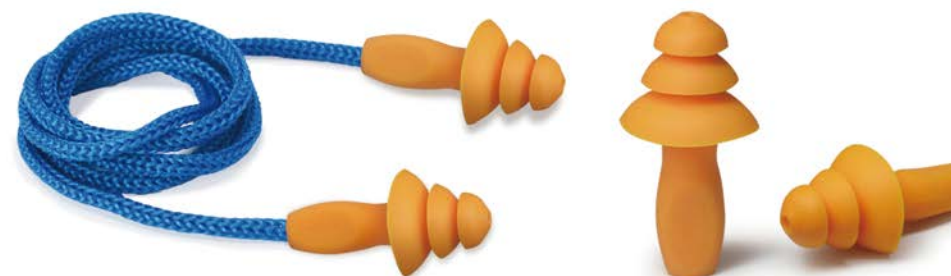

EN 352-2:2020
SNR 32dB
H= 31dB M= 30dB L= 29dB

ANSI S3.19-1974
Noise Reduction Rate **NRR 26dB**
AS/ NZS 1270: 2002
SLC(80) = 13.8dB CLASS 2

Banded round shape earplugs

EC-4102 / EC-4102S



Round Shape Earplug
(replace pods)
EC-4102S



Banded hearing protectors are easy to use, extremely comfortable. They are fast insert and remove in quick and can be worn or around the neck when not for use, making them ideal for intermittently use. It offers simplicity to help improve the choice of hearing protection products that suits the working environment greatly. With replacement foam pods making them a more cost-saving option.

Features and benefits:

- Comfortable**
- + Extremely light
 - + Very low pressure into the ear canal
 - + Without deep insertion Pod plugs seal the entrance part of the ear canal.

EN 352-2:2020

SNR 29dB

ANSI S3. 19- 1974

Noise Reduction Rate

NRR 23dB

Frequency [Hz]	125	250	500	1000	2000	4000	8000
Sound attenuation Mf [dB]	30.3	25.2	25.9	26.9	35.1	42.5	44.8
Standard deviation Sf [dB]	4.1	3.6	3.9	2.3	3.5	3.6	4.2
APV Mf-Sf [dB]	26.1	21.6	22.0	24.6	31.6	38.9	40.6

SNR=29dB

SNR_m=31.2dB

SNR_r=2.1dB

H=32dB

H_m=34.0dB

H_r=2.1dB

M=26dB

M_m=27.7dB

M_r=2.1dB

L=24dB

L_m=26.4dB

L_r=2.7dB

Banded taper shape earplugs

EC-4103 / EC-4103S



Taper Shape Earplug
(replace pods)
EC-4103S



Banded hearing protectors are easy to use, extremely comfortable. They are fast insert and remove in quick and can be worn or around the neck when not for use, making them ideal for intermittently use. It offers simplicity to help improve the choice of hearing protection products that suits the working environment greatly. With replacement foam pods making them a more cost-saving option.

Features and benefits:

- Comfortable**
- + Extremely light
 - + Very low pressure into the ear canal
 - + Without deep insertion Pod plugs seal the entrance part of the ear canal.

EN 352-2:2020

SNR 27dB

ANSI S3. 19-1974

Noise Reduction Rate

NRR 22dB

Frequency [Hz]	125	250	500	1000	2000	4000	8000
Sound attenuation Mf [dB]	26.7	23.8	24.3	26.4	34.1	41.9	44.3
Standard deviation Sf [dB]	4.1	3.8	4.0	3.8	4.6	4.4	4.3
APV Mf-Sf [dB]	22.7	20.0	20.3	22.6	29.5	37.5	40.0

SNR=27dB

SNR_m=30.1dB

SNR_s=2.9dB

H=30dB

H_m=33.0dB

H_s=3.1dB

M=24dB

M_m=26.7dB

M_s=3.1dB

L=22dB

L_m=24.9dB

L_s=3.0dB

Banded bell shape earplugs

EC-4105 / EC-4105S



Taper Shape Earplug
(replace pods)
EC-4105S



Banded hearing protectors are easy to use, extremely comfortable. They are fast insert and remove in quick and can be worn or around the neck when not for use, making them ideal for intermittently use. It offers simplicity to help improve the choice of hearing protection products that suits the working environment greatly. With replacement foam pods making them a more cost-saving option.

Features and benefits:

- Comfortable**
- + Extremely light
 - + Very low pressure into the ear canal
 - + Without deep insertion Pod plugs seal the entrance part of the ear canal.

- Convenient**
- + Can be worn in either under-the-chin or Behind-the-head
 - + Easy to use
 - + Ideal for people moving in and out
 - + Replacement Foam pods available

- Compatible with**
- + Designed to be compatible with other PPE

Packing Series

Optional packages by plastic or color paper boxes in different shape for customerized selling unit. Plastic box: Using high quality plastic materials, with Taiwan high standard mold injection.





SM-008

DISPOSABLE PROTECTION MASK 3-LAYER MASK

Outer & Inner : Non-Woven Fabric (PP)
 Filter : Melted Blown Fabric (BFE ≥ 95%)
 Color : White / Blue
 Shapes : 3-Layer Mask
 Packing Specification :
 50PCS/Box , Size : 20×10.5×9cm
 2000PCS/Carton , Size : 55×42×38.5cm

Industrial : YY/T 0969-2013
 Medical : EN14683:2019 TYPE IIR



Medical

Industrial



SM-006

FOLDED DESIGN SAFETY MASK KN95

Outer & Inner : Non-Woven Fabric (PP)
Filter : Melted Blown Fabric (BFE ≥ 95%)
Color : White / Blue
Shapes : KN95 Mask / KN95 Mask With Valve
Packing Specification :
20PCS/Box , Size : 14.5×14.5×12cm
1000PCS/Carton , Size : 61×34.5×45.5cm

GB2626-2006 KN95



Industrial

Industrial



SM-009 (FT-N040) NIOSH N95

Outer & Inner : Non-Woven Fabric (PP)
Filter : Melted Blown Fabric
Shapes : Folded Mask N95 FFP3
Packing Specification :
5PCS/Box , Size : 13×12.5×4.5cm
100PCS/Carton , Size : 66.5×37.5×29cm

NIOSH N95



SM-010 (HY8232) FFP3

Outer & Inner : Non-Woven Fabric (PP)
Filter : Melted Blown Fabric
Shapes : Folded Mask FFP3 With Valve
Packing Specification :
10PCS/Box , Size : 14.5×14.5×12cm
200PCS/Carton , Size : 62×30×29cm

EN149-2001 FFP3 NR



SM-001 (D-4101/D-4101V)

Hot Best Selling

CUP DESIGN SAFETY MASK FFP2

Industrial

Outer & Inner : Non-Woven Fabric (PP)
Filter : Melted Blown Fabric
Color : White / Yellow / Red
Shapes : FFP2 Cup Mask / Cup Mask FFP2 With Valve
Packing Specification :
20 PCS/Box , Size : 22×14.5×12.5cm
400 PCS/Carton , Size : 61×42×29cm

EN149-2001 FFP2 NR



SM-011 (HY9330) FFP3

Outer & Inner : Non-Woven Fabric (PP)
Filter : Melted Blown Fabric
Shapes : Folded Mask
Packing Specification :
10PCS/Box , Size : 14.5×14.5×12cm
200PCS/Carton , Size : 49×46×38cm

EN149-2001 FFP3 NR



SM-011 (HY9332) FFP3

Outer & Inner : Non-Woven Fabric (PP)
Filter : Melted Blown Fabric
Shapes : Cup Mask FFP3 With Valve
Packing Specification :
10PCS/Box , Size : 14.5×14.5×12cm
200PCS/Carton , Size : 49×46×38cm

EN149-2001 FFP3 NR





Industrial



GM2000 CARBON FILTERS

Mask Holder : Silica Gel

Filter : Two Replaceable Carbon Filters

Band : Adjustable Elastic Head Band

Shapes : Half Respirator Mask

CE EN140:1998

GB2890-2009



SR800 DUST FILTERS

Mask Holder : Silica Gel


Filter : Two Replaceable Dust Filters

Band : Adjustable Elastic Head Band

Shapes : Half Respirator Mask

CE EN140:1998

GB2890-2009





- Head strap with human-centered design and good elasticity, easy to wear with safety helmet.
- Bottom exhalation valve has a drainage function to reduce the accumulation of hot air.



- Use high quality silicone, integrated molding technique, soft and comfortable, good sealing, oil resistance and aging resistance, suitable for long-term wear.
- Nanhe's patented buckle design that can deal with repeated assembling and disassembling without breaking, easy and fast to assemble. Can be connected to cartridge and filter cotton socket as a gas or dust respirator.



- Comply with GB 2890-2009 and GB 2626-2019 standards, obtained China LA certification and CE certification.
- Packing: 36 sets/box, bag + medium box (6 sets/medium box)

Respirator cartridge

Available for 2728+,2728,2828



- Protect against organic gases or vapors, such as benzene and its congeners, anilines, gasoline, acetone, alcohols, ethers, aldehydes, carbon tetrachloride, chloroform, methyl bromide, methyl chloride, Nitrobenzene, Nitroalkane, and Chloropicrin.
- Use brown label strips that are compliant with the international standard.
- Use imported coconut shell activated carbon for long-lasting effect.
- Comply with GB 2890-2009 standard, obtained CE certification and China LA certification.



- Protection object: Used to protect ammonia and organic derivatives of ammonia, such as ammonia, methylamine, and other alkaline gases.
- Use green label strips that are compliant with the international standard.
- Use imported coconut shell activated carbon for long-lasting effect.
- Comply with GB 2890-2009 standard, obtained China LA certification.



- Protection object: Used to protect sulfur dioxide and other acidic gases or vapors, such as sulfur dioxide, hydrogen chloride, phosphorus and chlorine-containing organic pesticides and other acidic gases.
- Use yellow label strips that are compliant with the international standard.
- Use imported coconut shell activated carbon for long-lasting effect.
- Comply with GB 2890-2009 standard, obtained CE certification and China LA certification.



- Protection object: Used to protect inorganic gases or vapors, such as hydrocyanic acid, chlorine gas, hydrogen arsenide, phosgene, biphosgene, bitter chloride, benzene, bromomethane, Louis gas, mustard gas.
- Use gray label strips that are compliant with the international standard.
- Use imported coconut shell activated carbon for long-lasting effect.
- Comply with GB 2890-2009 standard,



- Protection against organic gases or vapors, such as benzene and its homologues, ketones, alcohols, ethers, aldehydes, alkanes, carbon tetrachloride, chloropyros, etc.
- Protection against sulfur dioxide and other acidic gases or vapors, such as sulfur dioxide, hydrogen chloride, phosphorus and chlorine-containing organic pesticides.
- Use dual color label strips of brown and yellow that are compliant with the international standard.
- Use imported coconut shell activated carbon for long-lasting effect.
- Comply with GB 2890-2009 standard.



Packing: 108 PCS/box, bag + medium box (6 PCS/medium box)

9105A

Round Primary Filter Cotton Used on Cartridge for 2828, 2728, and 2728+



- Effectively filter the paint mist produced by various painting operations, and use 2728+, 2728, 2828 masks on the filter box.
- Packing method: 1000 pieces/box (20 pieces ×50 bags)

9105

P1 Round Primary Filter Cotton Used on Cartridge for 2828, 2728, and 2728+



- Effectively filter the paint mist produced by various painting operations, and use 2728+, 2728, 2828 masks on the filter box.
- The filtration efficiency is more than 95%, in line with GB2890-2009 P1 standard.
- Packing method: 1000 pieces/box (20 pieces ×50 bags)

9108

Filter Retainer



- High strength engineering plastic, high temperature resistance, oil resistance, suitable for 2728+, 2728, 2828, 8809+, 8809, 9006+ mask used on the filter box.
- Packing method: 400 PCS/box (10 PCS/bag ×40 bags)



- Head strap with human-centered design and good elasticity, easy to wear with safety helmet.
- Unique positioning feature that facilitates the one-step installation of filter cotton.
- The bottom exhalation valve has a drainage function to reduce the accumulation of hot air.



- Use high quality silicone, integrated molding technique, soft and comfortable, good sealing, oil resistance and aging resistance, suitable for long-term wear.
- Durable buckle design that can deal with repeated assembling and disassembling without breaking, easy and fast to assemble.
- Low resistance large air intake window;



- Comply with GB 2626-2019 standard, obtained China LA certification and CE certification.
- Packing: 36 sets/box, bag + medium box (6 sets/medium box)(Cotton not included)

2828

Low-Resistance High-Efficiency Comfort Silicone Single-Cartridge Respirator(No Cartridge Included)



- Use high quality silicone, integrated molding technique, soft and comfortable, good sealing, oil resistance and aging resistance, suitable for long-term wear.
- Head strap with human-centered design and good elasticity, easy to wear with safety helmet.
- Bottom exhalation valve has a drainage function to reduce the accumulation of hot air.
- Nanhe's patented buckle design that can deal with repeated assembling and disassembling without breaking, easy and fast to assemble. Can be connected to cartridge and filter cotton socket as a gas or dust respirator.
- Comply with GB 2890-2009 and GB 2626-2019 standards, obtained China LA certification and CE certification.
- Packing: 36 sets/box, bag + medium box (6 sets/medium box)

2838

Filter Cotton Holder For 2828, 2728, and 2728+



- Can be connected with respirator 2728+, 2728 and 2828, and used with filter cotton 2601A, 2601, 2602, and 2600.
- The design of the louvered air window with built-in dot-shaped support greatly improves air circulation and reduces resistance.
- With the filter cotton positioning device patented by Nanhe, it is convenient for the positioning and installation of the filter cotton, obtained CE certification.
- Packing: 144 PCS/box, (bag + medium box) 24 PCS/medium box

Filter Cotton

Available for2718+, 2718, 2818



2601A KN90 Filter Cotton (Economical Type)

- Effective filter for non-oil particulate.
- Provide protection against coal dust, silicon dust, cement dust, foundry dust, ceramic dust, and other dust pollution generated by grinding, welding, and chemical processes.
- Filtration efficiency of more than 90%, comply with GB2626-2019 KN90 standard.
- Packing method: 1000 pieces/box (20 pieces ×50 bags)

2601 KN90 Filter Cotton (Long-lasting Type)


- Effective filter for non-oil particulate.
- Provide protection against coal dust, silicon dust, cement dust, foundry dust, ceramic dust, and other dust pollution generated by grinding, welding, and chemical processes.
- Filtration efficiency of more than 90%, comply with GB2626-2019 KN90 standard.
- Packing method: 1000 pieces/box (20 pieces ×50 bags)

2602 KN95 Filter Cotton

- Effective filter for non-oil particulate.
- Provide protection against coal dust, silicon dust, cement dust, foundry dust, ceramic dust, and other dust pollution generated by grinding, welding, and chemical processes.
- Nancore unique electrostatic adsorption filter cotton, low respiratory resistance, high protection efficiency.
- Filtration efficiency of more than 95%, comply with GB2626-2019 KN95 standard,obtained CE certification .
- Packing method: 1000 pieces/box (20 pieces ×50 bags)

2600 KP95 Paint Fog and Smoke Carbon Fiber Filter Cotton

- Efficient protection of organic vapor odor and dust can protect oily particles.
- It is suitable for breathing protection during welding, casting and grinding in shipbuilding, metal manufacturing, metal smelting and other industries.
- Filtration efficiency of more than 95%, in line with GB 2626-2019 KP95 standard.
- Packing method: 1000 pieces/box (20 pieces ×50 bags)

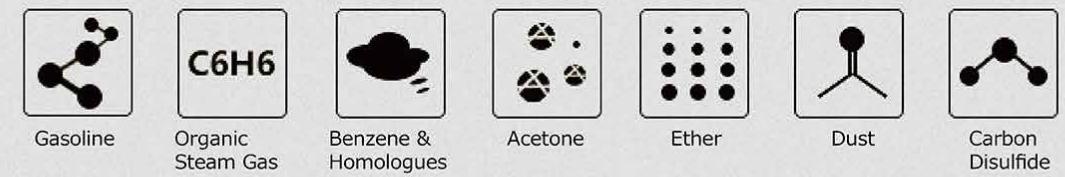

Efficient Filtration

Efficient Filtration

Breathe In

Breathe Out

Breathe In

Hot Best Selling



GM8000 CARBON FILTERS

Mask Holder : Liquid Silica Gel

Face Protector : Anti-Fog Wide View PC

Filter : Two Replaceable Carbon Filters

Band : Adjustable Elastic Head Band

Shapes : Full Respirator Mask

GB2890-2009



Double Filters, Bring You More Clean Air





GM8100 CARBON FILTERS

Mask Holder : Liquid Silica Gel
 Face Protector : Anti-Fog Wide View PC
 Filter : Two Replaceable Carbon Filters
 Band : Adjustable Elastic Head Band
 Shapes : Full Respirator Mask

GB2890-2009



GM8200 CARBON FILTERS

Mask Holder : Liquid Silica Gel
 Face Protector : Anti-Fog Wide View PC
 Filter : Two Replaceable Carbon Filters
 Band : Adjustable Elastic Head Band
 Shapes : Full Respirator Mask

GB2890-2009



GM8300 CARBON FILTERS

Mask Holder : Liquid Silica Gel
 Face Protector : Anti-Fog Wide View PC
 Filter : Two Replaceable Carbon Filters
 Band : Adjustable Elastic Head Band
 Shapes : Full Respirator Mask

GB2890-2009



Replaceable Filter List ACCORDING TO DIFFERENT WORKPLACES



P-A-1

Against for :
 Organic gas & Steam
 Material :
 Active Carbon



P-B-1

Against for :
 Hydrogen Cyanide &
 Inorganic Gas
 Material :
 Active Carbon



P-E-1

Against for :
 Sulfur Dioxide
 & Acid Gas
 Material :
 Active Carbon



P-H₂ S-1

Against for :
 Hydrogen Sulfide
 Material :
 Active Carbon



P-K-1

Against for :
 Ammonia
 Material :
 Active Carbon



DR1010

Against for :
 Dust & Fine Particles
 Material :
 Carbon



Y-1001 VEST

Material : 100% Polyester Knit/Mesh
Fabric Weight / m² :
60/80/100/120g Or Customized
Reflective Tape : 5cm Width TC
Closure : Velcro/Zipper
Color : Hi-Viz Green / Hi-Viz Orange
Pocket : Can Be Customized

EN ISO20471



Hi-Viz
Green

Hi-Viz
Orange



Y-1004 VEST

Material : 100% Polyester Knit/Mesh
Fabric Weight / m² :
60/80/100/120g Or Customized
Reflective Tape : 5cm Width TC
Closure : Velcro/Zipper
Color : Hi-Viz Green / Hi-Viz Orange
Pocket : Can Be Customized

EN ISO20471



Hi-Viz
Green

Hi-Viz
Orange



Y-1007 VEST

Material : 100% Polyester Knit/Mesh
Fabric Weight / m² :
60/80/100/120g Or Customized
Reflective Tape : 5cm Width TC
Closure : Velcro/Zipper
Color : Hi-Viz Green / Hi-Viz Orange
Pocket : Can Be Customized

EN ISO20471



Hi-Viz
Green

Hi-Viz
Orange





Y-1017 VEST

Material : 100% Polyester Knit/Mesh
 Fabric Weight / m² : 120g
 Reflective Tape :
 5cm Width TC
 8cm Knitted Padding Cloth
 Closure : Velcro
 Color : Hi-Viz Green / Hi-Viz Orange
 Pocket : 1 Waist Pocket

EN ISO20471



Y-1081 VEST

Material : 100% Polyester Knit/Mesh
 Fabric Weight / m² : 120g
 Reflective Tape :
 5cm Width High Luster's Heat Transfer Film
 7.5cm Knitted Padding Cloth
 Closure : Zipper
 Color : Hi-Viz Green / Hi-Viz Orange
 Pocket :
 2 Chest Pockets
 2 Waist Pockets
 2 Radio Straps

EN ISO20471



Y-1055B VEST

Material : 100% Polyester Knit/Mesh
 Fabric Weight / m² : 120g
 Reflective Tape :
 5cm Width TC
 8cm Knitted Padding Cloth
 Closure : Zipper
 Color : Hi-Viz Green / Hi-Viz Orange
 Pocket :
 2 Chest Pockets
 2 Waist Pockets

EN ISO20471



Y-1078 VEST

Material : Double Layers 100% Polyester Mesh
 Fabric Weight / m² : 120g
 Reflective Tape : 5cm Width TC
 Closure : Zipper
 Color : Hi-Viz Green / Hi-Viz Orange
 Pocket :
 2 Chest Pockets 6 Ribbons
 2 Waist Pockets
 1 Radio Strap
 Adjustable Shoulder

EN ISO20471



Hot Best Selling



Y-1060A VEST

Material : 100% Polyester Knit/Mesh
 Fabric Weight / m² : 120g
 Reflective Tape :
 5cm Width TC
 8cm Knitted Padding Cloth
 Closure : Zipper
 Color : Hi-Viz Green / Hi-Viz Orange
 Pocket :
 2 Chest Pockets
 2 Waist Pockets

EN ISO20471



Y-1083 VEST

Material : 100% Polyester Knit/Mesh
 Fabric Weight / m² : 120g
 Reflective Tape : 5cm Width TC
 Closure : Zipper
 Color : Hi-Viz Green / Hi-Viz Orange
 Pocket :
 3 Chest Pockets 4 Ribbons
 2 Waist Pockets 1 Back Waist Pocket
 2 Radio Straps

EN ISO20471





REFLECTIVE TAPE T-SHIRT

Material : 100% Polyester Bird-Eye Mesh
Reflective Tape : 5cm Width TC
Color : Hi-Viz Green / Hi-Viz Orange
Color Can Be Customized

EN ISO20471

Y-1091



Y-1093



Y-1094



Y-1099A



Y-1099C



Hot Best Selling

Y-1101 COAT

Material : 100% Polyester 300D Oxford With PU Coating
 Reflective Tape : 5cm Width
 Closure : Zipper&Button
 Color : Hi-Viz Green / Hi-Viz Orange
 Color Can Be Customized
 Pocket :
 1 Chest Pocket
 2 Waist Pockets

EN ISO20471

Hi-Viz
Green

Hi-Viz
Orange



Y-1049 COAT

Material : 100% Polyester 300D Oxford With PU Coating
 Reflective Tape :
 2.5cm Width
 5cm Knitted Padding Cloth
 Closure : Zipper&Button
 Color : Hi-Viz Green / Hi-Viz Orange

EN ISO20471

Hi-Viz
Green

Hi-Viz
Orange



Y-1104B COAT

Material : 100% Polyester 300D Oxford With PU Coating
 Reflective Tape : 5cm Width
 Closure : Zipper&Button
 Color : Hi-Viz Green / Hi-Viz Orange
 Color Can Be Customized
 Pocket :
 1 Chest Pocket
 2 Waist Pockets

EN ISO20471

Hi-Viz
Green

Hi-Viz
Orange



Y-1103 COAT

Material : 100% Polyester 300D Oxford With PU Coating
 Reflective Tape :
 5cm Knitted Padding Cloth
 Closure : Zipper&Button
 Color : Hi-Viz Green / Hi-Viz Orange
 Pocket :
 1 Chest Pocket
 2 Waist Pockets

EN ISO20471

Hi-Viz
Green

Hi-Viz
Orange



Y-1104T 2 IN 1

Material : 100% Polyester 300D Oxford With PU Coating
 Reflective Tape : 5cm Width
 Closure : Zipper
 Color : Hi-Viz Green / Hi-Viz Orange
 Color Can Be Customized
 Pocket :
 Outer : 1 chest pocket 2 Waist Pockets
 Inner : 2 Waist Pockets

EN ISO20471

Hi-Viz
Green

Hi-Viz
Orange



Y-1109 COAT

Material : 100% Polyester 300D Oxford With PU Coating
 Reflective Tape :
 5cm Knitted Padding Cloth
 Closure : Zipper&Button
 Color : Hi-Viz Green / Hi-Viz Orange
 Pocket :
 1 Chest Pocket
 2 Waist Pockets

EN ISO20471

Hi-Viz
Green

Hi-Viz
Orange



WN-010107



REFLECTIVE WORKING BELT WITH STRAPS

Hot Best Selling

Shapes : Waist Belt With Straps

Material : Durable Nylon & Polyester


Reflective Tape : Side & Back

Color : Hi- Viz Green / Hi- Viz Orange / Black

- Adjustable Strap With Buckle
- Fish Bone Style Elastic Bands
- Velcro Fasteners Easy Use

Package:

1 PC/Polybag, 25 PCS/Carton,
48*23*25CM, 8 KGS/Carton



Hi-Viz
Green



Hi-Viz
Orange



Black

WN-010104

REFLECTIVE WORKING BELT WITH STRAPS



Shapes : Waist Belt With Straps
Material : Durable Nylon & Polyester
Reflective Tape : Side & Back
Color : Hi- Viz Green / Hi- Viz Orange / Black

- Adjustable Strap With Buckle
- High Quality Stitching Breathable Mesh
- Velcro Fasteners Easy Use

Package:
1 PC/Polybag, 25 PCS/Carton,
48*23*25CM, 8 KGS/Carton



WN-010113

X-BRACE SUPPORT WORKING BELT WITH STRAPS




Shapes : X-Brace Support Waist Belt With Straps
Material : High Quality Stitching Breathable Mesh & TPR
Color : Black

- Adjustable Strap With Buckle
- High Quality Stitching Breathable Mesh
- Velcro Fasteners Easy Use

Package:
1 PC/Polybag, 25 PCS/Carton,
48*23*25CM, 8 KGS/Carton



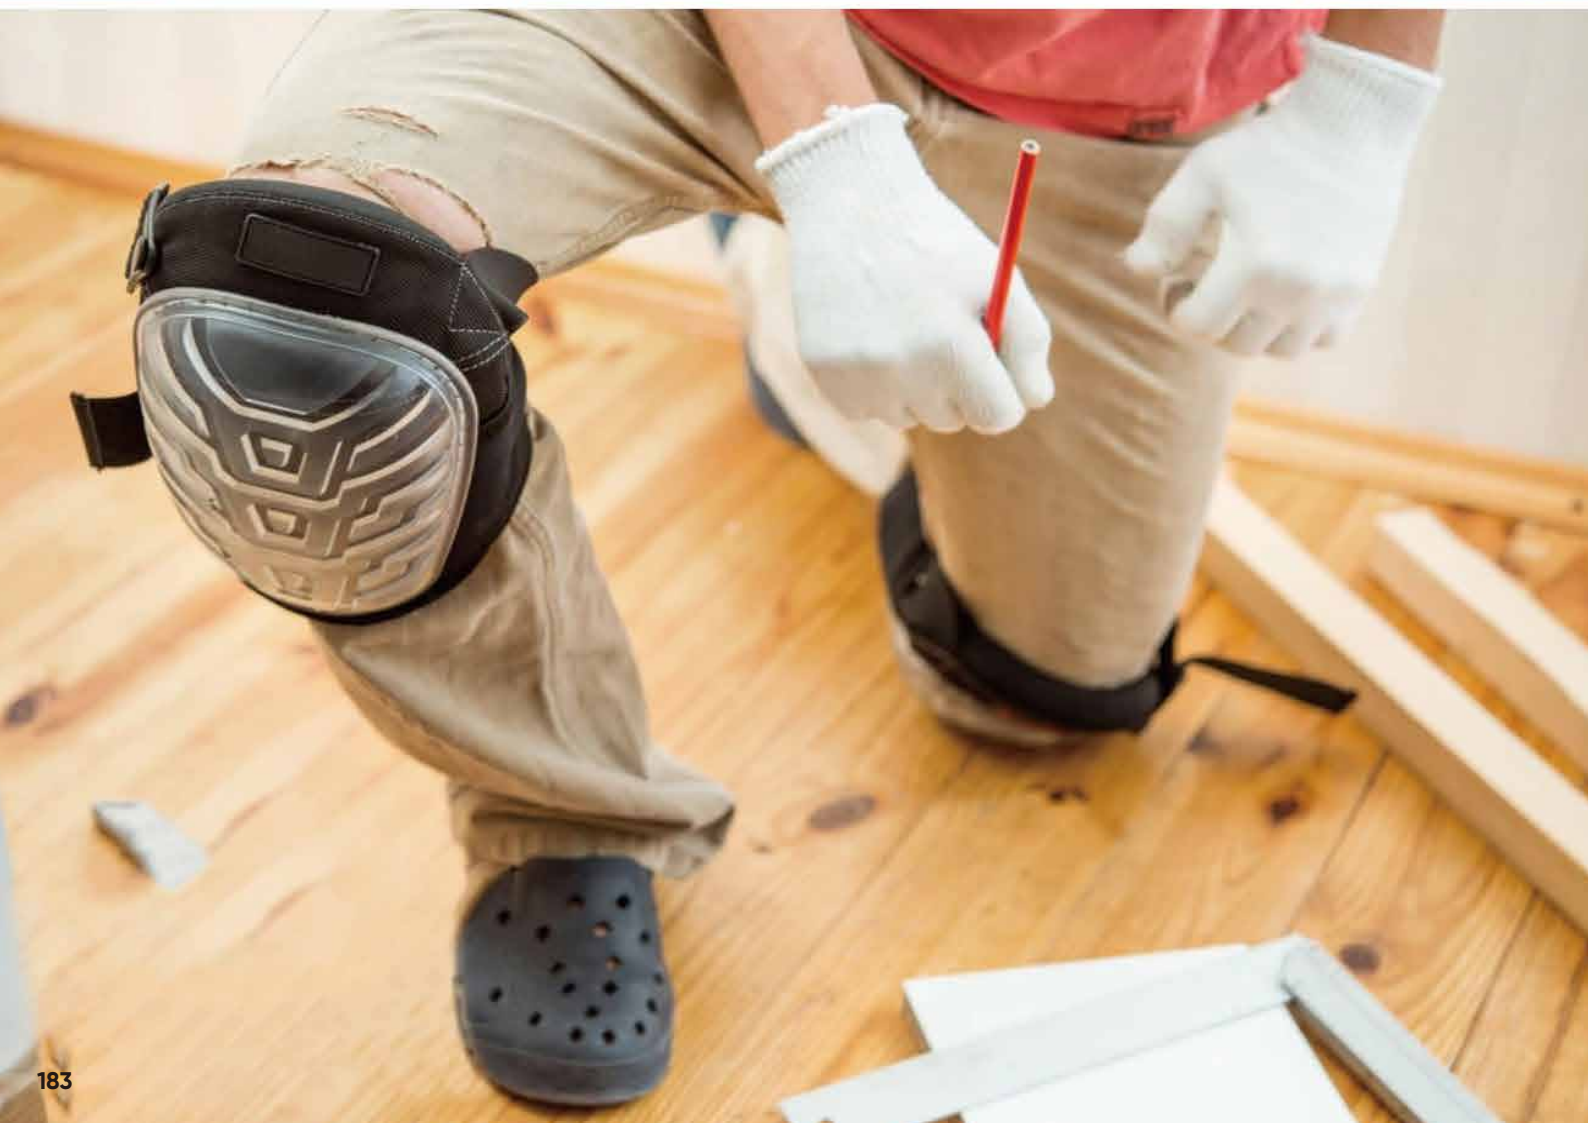

K1

 In Stock

LIGHT WEIGHT EVA KNEE PADS

Shell : Non-Marking Foamed EVA

Liner : Comfortable Polyester Loop-pile

Band : Adjustable Elastic Strap

- Comfortable Fit
- Large Size And Sturdiness Durability
- Velcro Fasteners Easy Use

Package:

1 PC/Polybag, 20 PCS/Carton,
41*38*31CM, 3.5 KGS/Carton



VENTILATION



COMFORTABLE



LIGHT WEIGHT



WEARPROOF



K2

Hot Best Selling


In Stock

PROFESSIONAL GEL KNEEPADS

Shell : Heavy Duty Non-Marking PVC+TPR
 Liner : Breathable Mesh Fabric
 Band : Adjustable Elastic Strap
 Layering : Shock Absorption Foamed Gel

- Comfortable Fit
- Large Size And Sturdiness Durability
- Velcro Fasteners Easy Use

Package:
 1 PC/Polybag, 10 PCS/Carton,
 60*48*23CM, 8.5 KGS/Carton



Shock Absorbtion Silica Gel Inner
 Foamed Silica Gel Inner can Greatly Reduce Crawling Knee Pressure, esp for Long-time Work

K3

PROFESSIONAL GEL KNEEPADS

Shell : Heavy Duty Non-Marking PVC+TPR
 Liner : Breathable Mesh Fabric
 Band : Adjustable Elastic Strap
 Layering : Shock Absorption Foamed Gel

- Comfortable Fit
- Large Size And Sturdiness Durability
- Velcro Fasteners Easy Use

Package:
 1 PC/Polybag, 10 PCS/Carton,
 59*40*25CM, 7.8 KGS/Carton




K4

PROFESSIONAL GEL KNEEPADS

Shell : Heavy Duty Non-Marking PVC+TPR
 Liner : Breathable Mesh Fabric
 Band : Adjustable Elastic Strap With Buckle
 Layering : Shock Absorption Foamed Gel

- Comfortable Fit
- Large Size And Sturdiness Durability
- Velcro Fasteners Easy Use

Package:
 1 PC/Polybag, 10 PCS/Carton,
 48*41*40CM, 13.5 KGS/Carton



K5

PROFESSIONAL GEL KNEEPADS



Shell : Heavy Duty Non-Marking PVC+TPR
 Liner : Breathable Mesh Fabric
 Band : Adjustable Elastic Strap
 Layering : Shock Absorption Foamed Gel

- Comfortable Fit
- Large Size And Sturdiness Durability
- Velcro Fasteners Easy Use

Package:
 1 PC/Polybag, 10 PCS/Carton,
 59*43*31CM, 7.5 KGS/Carton






Heavy Duty ABS Shell

Non-Slip ABS Shell is Designed to Protect Knees from Nails, Screws, Glasses, Dirts etc



Breathable Mesh Liner

Soft and Breathable Mesh Liner
Keep Your Knees from Sweet for All-day Comfort




K6(343KP)  In Stock

PROFESSIONAL GEL KNEEPADS


Shell : Heavy Duty Non-Marking PVC+TPR
Liner : Breathable Mesh Fabric
Band : Adjustable Elastic Strap
Layering : Shock Absorption Foamed Gel

- Comfortable Fit
- Large Size And Sturdiness Durability
- Velcro Fasteners Easy Use



Abrasion Resistant 750D Cordura

Heavy Duty 750D Cordura Fabric are
Built Tough for Long-lasting Durability

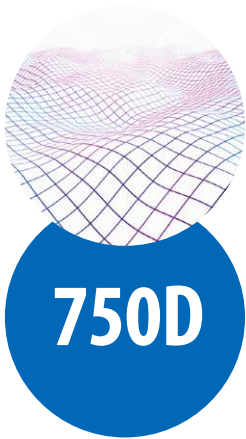

Breathable Mesh Liner

Abrasion Resistant 750D Cordura



Shock Absorption Silica Gel Inner

Heavy Duty ABS Shell



Safetoe Support- Full Marketing Support System



Safetoe marketing support system

SAFETOE offers the best-designed display area for wholesalers and retailers. Our modular display solution is tailored to meet your unique needs. Ready to open a new shop? Contact us for a free design consultation from our expert team. Let us help bring your vision to life!



Safetoe Support- Free Stand Design & Promoting Gifts



① Display Rack A ② Display Rack B ③ Pen ④ Notebook ⑤ Cap ⑥ T-Shirt ⑦ Socks ⑧ Umbrella

Safetoe Support- Professional Photos & Videos Download



Download



Download



Download



Download



Download



Download



Download



Download



Download



Download



Download



Download



Download



Download



Download



Download

Download

Name	Download
Safetoe Ready Shipping Catalog 2025.pdf	Download
2025-2026 Full Catalog	Download
Safetoe Introduction en 2026.pdf	Download

Download Images & Videos

Safetoe Support- Professional Documents for Tenders



Safetoe Introduction

Start With Comfort, More Than Safety



QUALITY GURANTEE

Thanks for choosing Shanghai Langfeng Industrial Co., Ltd. We hereby certify that quality is good condition as per buyer order, and confirm with the provision of Council Directive 89/886/EEC and where applicable with the Europe standard EN 20345:2022

To protect your right, we are hereby, to guarantee against defects arising from faulty or materials for a period 6 month from date of manufacture. The manufacture certifies that all products supplied to

ORDER NO: DELIVERED DATE: 

Remarks:

1. It is very important that safety shoes or boots must be selected for the right workplace and factory.
2. Care is very wet areas required. Gumboots would be more suitable for wet area applications. Highly oil resistant buy reference to chemical chart is recommended. Temperature limitation must be observed.
3. This warranty is limited to damage caused by accident, misuse, transport or any external cause.

Date: Signature: 


Company Introduction



M-8552 S3S

Superior Safety Work Boots (Metal Free)

Upper : Full Grain Oily Cow Nubuck Leather
Lining : Breathable Sandwich Air Mesh
Insole : Super Memory Foam Insoles
Outsole : PU/Rubber Injection (Slip Resistant)
Toecap : Composite Toecap
Penetration : Kevlar Midsole Plate
Size : EU 37-47# , UK 3-13# , USA 14-14#
CE EN ISO 20345:2022 S3S SR CI HI FO HRO
Application : Construction, Logistics, Mechanics, Workshop, Mining, Chemical Factory, Oil & Gas Industry etc



Composite Toe Cap Protection - ANI-EN12568
It is made with light weight fiber-glass material, which can reach 200 joules from falling or rolling objects. It is stronger and more light than steel toecap.

Kevlar Plate Protection - ANI-EN12568
Kevlar midsole plate, is zero-penetration resistant. It can resist 1100 newtons nail puncture from sharp objects. It is stronger and more flexible than steel plate.

Full Grain Cow Leather Upper - CE EN ISO 20345:2022
High quality dark brown oily cow nubuck leather with thickness 1.6-1.8mm. It is treated with breathable technology to keep feet from dry during walking all days. Tear strength is required 10% higher than Europe test requirement, to reach longer lifespan.

Heavy Duty PU/Rubber Outsole - CE EN ISO 20345:2022
The outsole is made with PU/Rubber material. The midsole is 45±5 degree hardness PU, which is soft and shock absorption. The outsole is natural rubber with 5%-10% nitrile. The outsole is designed to use at oil & gas resistant workplaces. It can pass SRC slip-resistant test.

 www.safetoe.net
Start With Comfort, More Than Safety

Datasheet

Certificate of Quality



EU DECLARATION OF CONFORMITY

Manufacturer: Shanghai Langfeng Industrial Co.,Ltd
Add: Room 910, Building 6, Luxiang road 111, Shanghai, China

Declares that the new PPE described hereafter

Style NO.: M-8552

are in conformity with the Regulation (EU) 2016/425 and with harmonized standard EN ISO 20345:2022 S3S SR CI HI FO HRO

performed the EU type-examination (Module B) of the Regulation (EU) 2016/425 and issued the certificate.

Notified Body information:


SGS FIMKO OY
Takomtie 8, FI-00380 Helsinki, Finland
Notified Body No. 0598

Signed for on behalf of Company

Name: Yuan Dong Peng
Position: General Manager
Signature: 

Declaration of Conformity

Safetoe Support- Approved Certificates & Trademarks & Patents

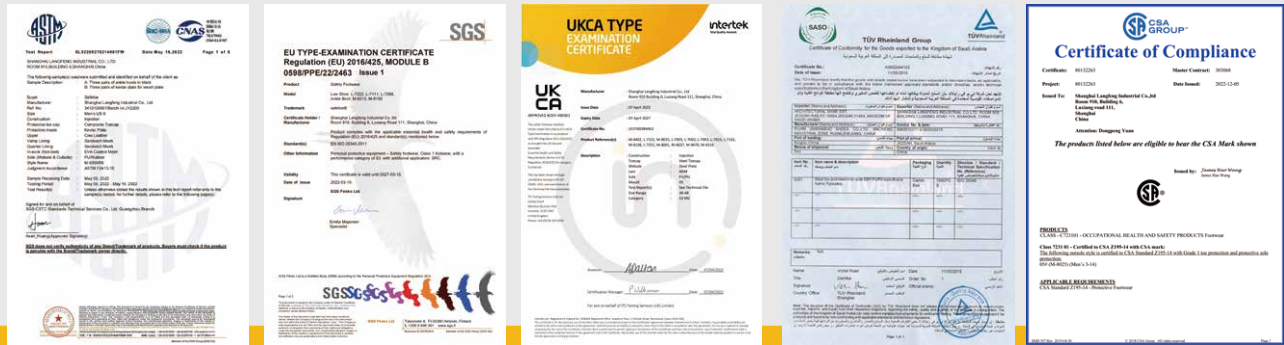

ASTM Certificate

CE Certificate

UKCA Certificate

SASO Certificate

CSA Certificate



Safetoe Chinese Trademark

Safetoe US Trademark

Safetoe EU Trademark



Safeyear US Trademark

ISO9001:2015 Certificate




Design Patent Certificates

Safetoe Support- Social Medias Promoting

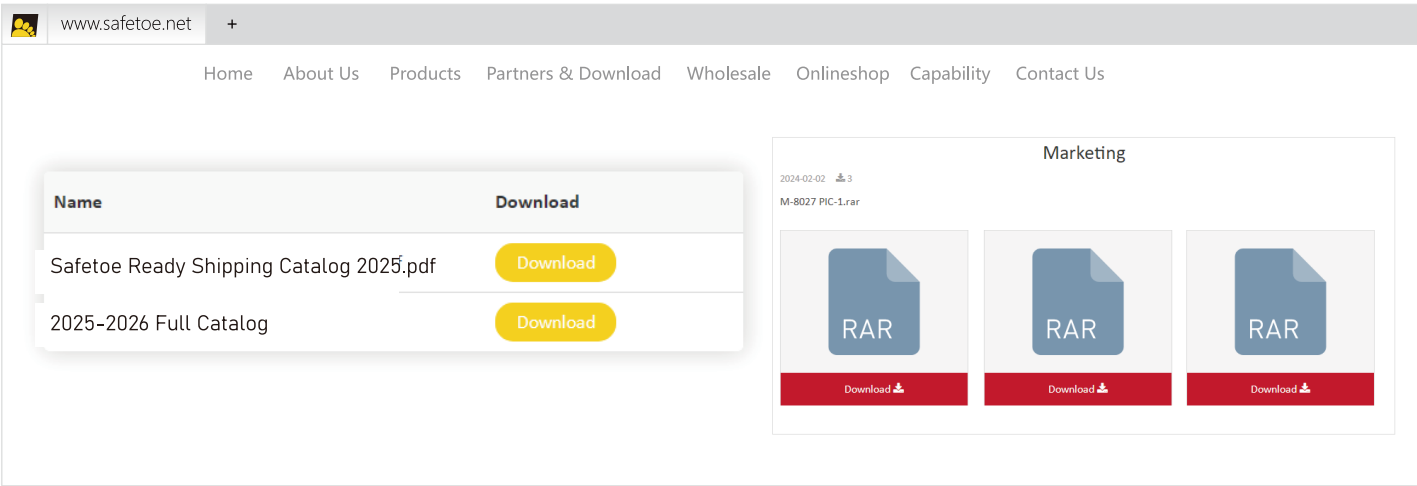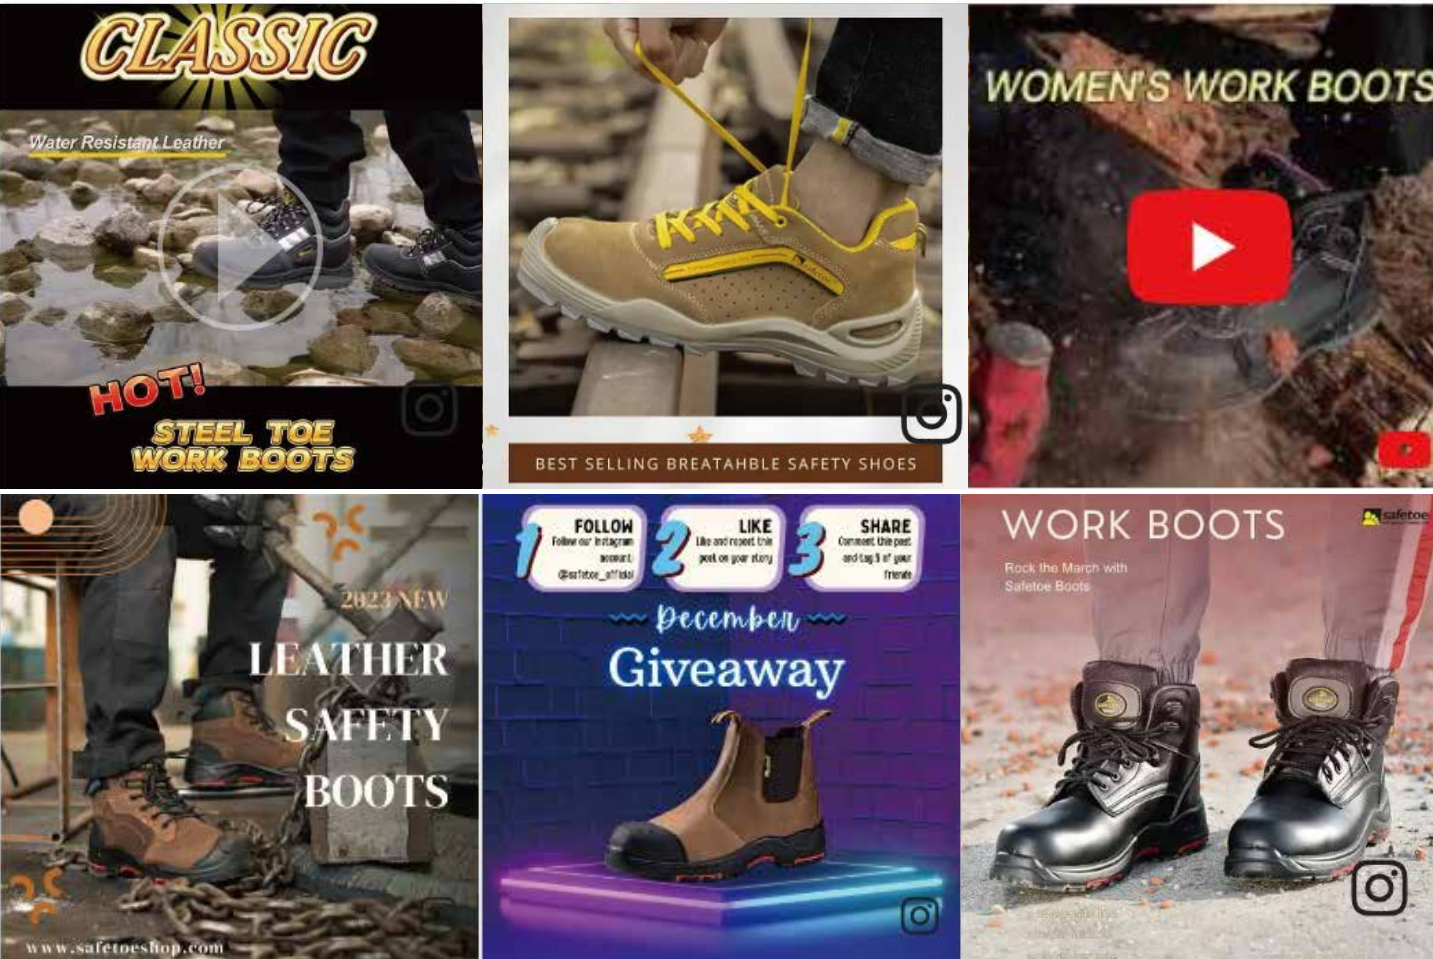

Development of Full Range PPE Products

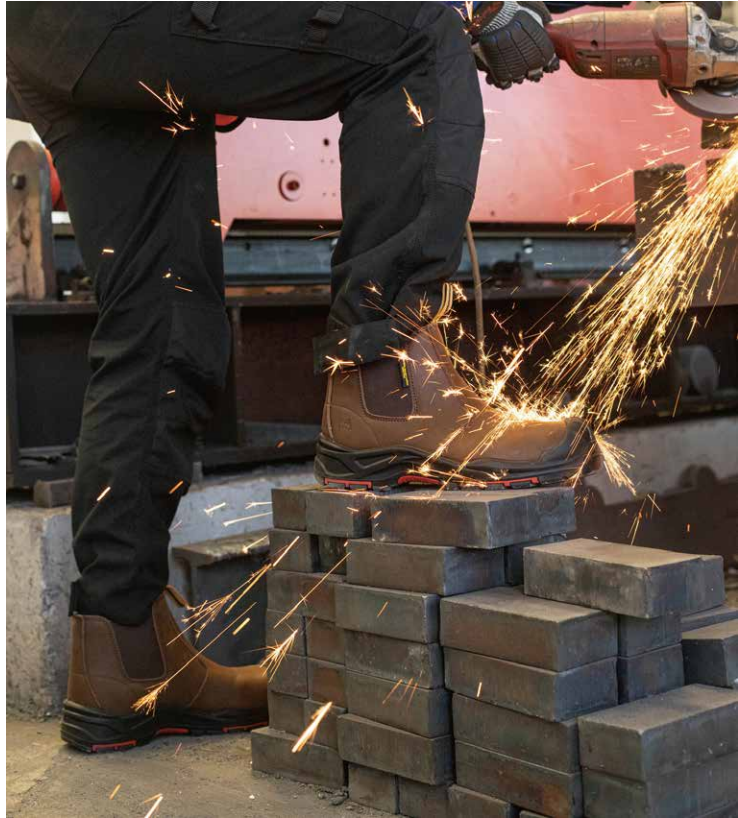

Keep you safe from head to toe



safetoe



Let Safetoe Protect Your Safety & Empower Your Work

Our Mission

Empowering global workers with intelligent safety technology & solutions

Our Vision

To be the most trusted PPE safety partner in emerging markets

Our Values

Engineering Solutions / Global Citizenship / Partnership Beyond Business