



M-8387 S3 SR

Welding Work Boots



Upper : LeatherQua™ Full Grain Cow Leather + Anti-Sparkle Leather Cover

Thread: Fire-resistant Kelvar Stitching

Lining : BactiVoid™ Anti-Bacteria Sandwich Mesh Liner

Insole : BactiVoid™ Anti-Bacteria Memory Foam Insoles

Outsole : QuantumHold™ Anti-Slip Nitrile Rubber Outsole

Toecap : VortiGard™ Non-metallic Composite Toecap

Penetration : VortiGard™ Non-metallic Kevlar Plate

Size : EU 37-47#, UK 3-13#, US4-14#

CE EN ISO 20345:2022 S3S SR CI HI FO HRO

ASTM E 2149-2020 Approved Anti-microbial Lining & Insoles (Odor Resistant)

Application : Welding, Metal Smelting, Mining, Construction, Mechanics, Oil & Gas Industry etc



200 JOULE
TOECAP



SLIP-
RESISTANT



SHOCK
ABSORPTION



ANTI-STATIC



ANTI-NAIL
MIDSOLE



PETROL AND
CHEMICAL
RESISTANT



WATER
RESISTANT



OIL
RESISTANT



Composite Toe Cap Protection • EN ISO 20345:2022

Composite Toecap is light-weight and non-magnetic. The impact resistance can reach 200 joules from falling or rolling objects. The compression resistance can reach 15kN.



Kevlar Plate Protection (Type PS) • EN ISO 20345:2022

Kevlar midsole plate is flexible and non-metallic. The penetration resistance can reach 1100 newtons from nail or other sharp objects. The flex resistance can reach to 1×10^6 flexion cycles without visible cracking.



Water Resistant Cow Leather Upper • EN ISO 20345:2022

High quality palm printed cow leather with thickness 1.6-1.8mm. It is treated with water resistant coating to protect feet from raining workday. The tear strength of upper leather can reach to 120 Newtons.




Heavy Duty PU/Rubber Outsole • EN ISO 20345:2022

PU/Rubber outsoles are manufactured with Germany Fully Automatic Injection Technology. The midsole is 45 ± 5 degree hardness PU, which is soft and shock absorption. The outsole is natural rubber with 5%-10% nitrile, which is abrasion resistant, slip resistant, oil resistant and heat resistant.

Sole Bonding Strength Test

- EN ISO 20345:2022, 5.3 (Between Upper & Sole)
- Average Test Result 5.8 ± 5 (N/mm)

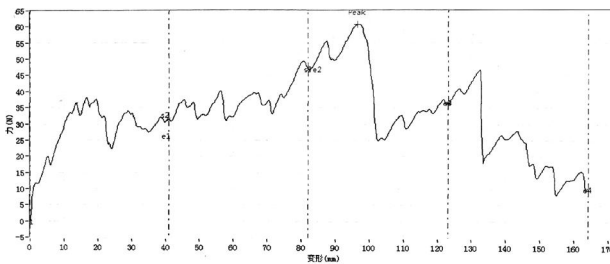

Upper, Lining & Bonding Strength Test Result

Leather Tear Strength \geq	120.0 Newtons
Leather Tensile Properties \geq	15.0 N/mm ²
Lining Tear Strength \geq	15.0 N/mm
Bonding Strength \geq	4.0 N/mm

✓ Protection With Slip Resistant (SR)		Result
Test Requirement : Forward Heel Slip ≥ 0.31 (Test methordL ISO 13287:2019) Backward Forepart Slip ≥ 0.36 (Test methordL ISO 13287:2019)		PASS
Standards : EN ISO 20345:2022(5.3.5) , Test floor: Ceramic tile, Lubricant: Sodium lauryl sulphate		
✓ Protection Against Heat Risk & Fire Sparkle 300°C		Result
Test Requirement : The Outsole Did Not Melt & Did Not Develop Any Cracks When Bent Aound Mandrel		PASS
Standards : EN ISO 20345:2022(6.4.1). 300°C HRO=Heat Resistant		
✓ Protection Resistant to Fuel Oil (FO)		Result
Test Requirement : Change in Volume and Change in Hardness (Outsole) is No More Than +12%(*)		PASS
Standards : EN ISO 20345:2022 (6.4.2)		
SAFETOE Standard Package Instruction (Average 42# for Reference)		
Shoes Weight : 1.2-1.3 KGS /Pair		Carton Weight : 13-14 KGS /Carton
1 Pair / Color Box , Dimensions : 32×24×12CM		10 Pair / Carton , Dimensions : 62×49×33CM



User Instructions:

- 1.) RECOMMENDED TO USE : Construction, Logistics, Mechanics, Glasses Installation, Workshop, Farming, Garden, Oil & Gas, Chemical Factory etc.
- 2.) LIMITATION TO USE: It is very important that footwear selected must be suitable for the right workplaces. The protection against risks or hazards which are not mentioned in this document is not warranted.
- 3.) FITTING & SIZE: All footwear are marked with standard size on tongue label. Some are with different size comparison, such as EU size, UK size, US size etc. Please wear footwear in a suitable size.

Footwear which are too loose or too tight may not provide optimum level of protection.

4.) STORAGE: Keep the footwear in its original packaging, under ordinary temperature, non-humidity conditions and in clean, covered and ventilated premises.

5.) CLEANING: Clean footwear regularly by high quality cleaning treatments recommended as suitable for the purpose. Don't use caustic or corrosive cleaning agents.